



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Housing - HC-EVO-B10-HHWD-EL-AL - 1411454

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON EVO sleeve housing, EMC version, without powder coating, with bayonet flange for EVO screw connection, B10, with double locking latch, height: 80 mm, without EVO screw connection.

### Why buy this product

- Flexible cable outlet direction, lateral or straight

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 932615

### Technical data

#### Dimensions

Height	80 mm
Width	53 mm
Length	73 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP66
	IP69K (ISO 20653:2013-02)
Degree of protection of housing (NEMA)	4
	4X
	12
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Sleeve housing
Locking type	With double locking latch
No. of cable outlets	1
Cable exit	straight
	Lateral
Screw connection	none

# Housing - HC-EVO-B10-HHWD-EL-AL - 1411454

## Technical data

### General

Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	Polyamide
Connection	The sleeve base housing must be supplemented with the EVO screw connection. The EVO screw connection is available in 4 sizes. It enables the creation of a straight or a lateral cable outlet. The EVO screw connection is assembled by hand or using a pipe wrench.

## Classifications

### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

## Approvals

### Approvals

#### Approvals

GL / EAC

#### Ex Approvals

#### Approvals submitted

### Approval details


GL
----

EAC
-----

## Drawings

## Housing - HC-EVO-B10-HHWD-EL-AL - 1411454

Dimensional drawing

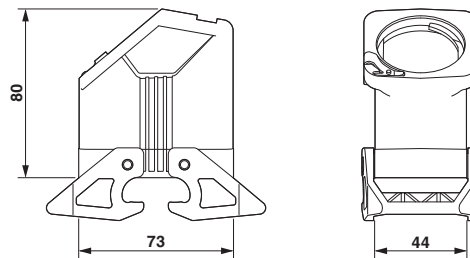

Dimensional drawing

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
HEAVYCON EVO sleeve housing, EMC version, without powder coating, with bayonet flange for EVO screw connection, B10, with double locking latch, height: 80 mm, without EVO screw connection.	1411454	HC-EVO-B10-HHWD-EL-AL	<a href="#">Buy on EAN</a>