



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Housing - HC-EVO-B10-CHWS-ELC-AL - 1411459

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON EVO coupling housing, EMC version, without powder coating, with bayonet flange for EVO screw connection, B10, with single locking latch, height: 83 mm, without EVO screw connection.

Why buy this product

- Flexible cable outlet direction, lateral or straight



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 932660

Technical data

Dimensions

Height	83 mm
Width	44 mm
Length	73 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
	IP69K (ISO 20653:2013-02)
Degree of protection of housing (NEMA)	4
	4X
	12
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10
Housing type	Coupling housings

Housing - HC-EVO-B10-CHWS-ELC-AL - 1411459

Technical data

General

Locking type	With single locking latch
No. of cable outlets	1
Cable exit	straight
	Lateral
Screw connection	none
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	Polyamide
Connection	The coupling basic housing must be supplemented with the EVO screw connection. The EVO screw connection is available in 4 sizes. It enables the creation of a straight or lateral cable outlet. The EVO screw connection is assembled by hand or using a pipe wrench.

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

Approvals

Approvals

Approvals

GL / EAC

Ex Approvals

Approvals submitted

Approval details

GL


Housing - HC-EVO-B10-CHWS-ELC-AL - 1411459

Approvals

EAC

Drawings

Dimensional drawing

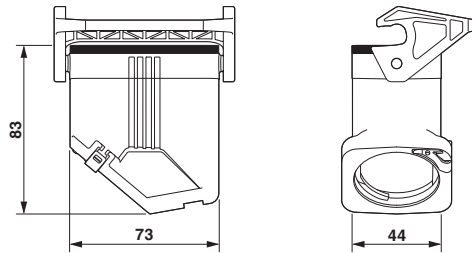

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
HEAVYCON EVO coupling housing, EMC version, without powder coating, with bayonet flange for EVO screw connection, B10, with single locking latch, height: 83 mm, without EVO screw connection.	1411459	HC-EVO-B10-CHWS-ELC-AL	Buy on EAN