



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Housing - HC-STA-B10-HHWD-1STM32-EL-AL - 1412609

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing B10, With double locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, Lateral, Height: 72 mm, Cable gland: none, Gland: no, 1x M32, Standard

Why buy this product

- good shielding in the event of electromagnetic interference



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 055626 059365 |

Technical data

Dimensions

| | |
|--------|-------|
| Height | 72 mm |
| Width | 44 mm |
| Length | 73 mm |

Ambient conditions

| | |
|--|---|
| Degree of protection of housing (IP) | IP66 |
| | IP69K (ISO 20653:2013-02, with suitable screw connection) |
| | IP67 |
| Degree of protection of housing (NEMA) | 4 |
| | 4X |
| | 12 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Size | B10 |

Housing - HC-STA-B10-HHWD-1STM32-EL-AL - 1412609

Technical data

General

| | |
|------------------------------|---|
| Housing type | Sleeve housing |
| Locking type | With double locking latch |
| No. of cable outlets | 1 |
| Cable exit | Lateral |
| Screw connection | none |
| Type of the screw connection | 1x M32 |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | Uncoated |
| Material lock | PA |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143423 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC000437 |
|----------|----------|

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted

Approval details


| |
|-----|
| EAC |
|-----|

| |
|----|
| GL |
|----|

Drawings

Housing - HC-STA-B10-HHWD-1STM32-EL-AL - 1412609

Dimensional drawing

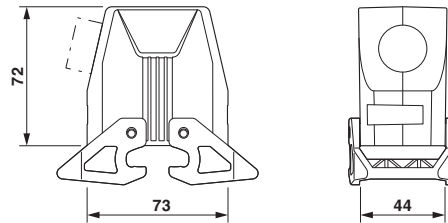

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|---------|--------------------------------------|----------------------------|
| Sleeve housing B10, With double locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 1, Lateral, Height: 57 mm, Cable gland: none, Gland: no, 1x M32, Standard | 1412609 | HC-STA-B10- HHWD-1STM32-EL- AL | Buy on EAN |