

Housing - HC-STA-B24-SLWS-2SSP21-ELC-AL - 1412879

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting bases B24, With single locking latch, Material: Die-cast aluminum, salt water resistant, Cable outlets: 2, Lateral, Height: 68 mm, Cable gland: none, Gland: Yes, 2x Pg21, Standard

Why buy this product

- good shielding in the event of electromagnetic interference



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 061283

Technical data

Dimensions

Height	68 mm
Width	57 mm
Length	144 mm

Ambient conditions

Degree of protection of housing (IP)	IP66 (for HC-EVO... / HC-STA... metal sleeve housing)
	IP69K (ISO 20653:2013-02, with suitable screw connection/suitable filler plug, for HC-EVO... / HC-STA... metal sleeve housing)
	IP67 (with suitable screw connection/suitable filler plug, for HC-STA... metal sleeve housing)
Degree of protection of housing (NEMA)	4
	4X
	12
Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	For contact inserts HC-B24, BB46, D64, DD108, HV10/16, M
------	--

Housing - HC-STA-B24-SLWS-2SSP21-ELC-AL - 1412879

Technical data

General

Size	B24
Housing type	Box mounting bases
Locking type	With single locking latch
No. of cable outlets	2
Cable exit	Lateral
Screw connection	none
Type of the screw connection	2x Pg21
Housing material	Die-cast aluminum, salt water resistant
Housing surface material	Uncoated
Material lock	PA
Assembly instructions	One opening is sealed with a plastic filler plug and can be opened using a screwdriver.

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143423
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 5.0	EC000437
----------	----------

Approvals

Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted

Approval details

EAC


Housing - HC-STA-B24-SLWS-2SSP21-ELC-AL - 1412879

Approvals

GL

Drawings

Dimensional drawing

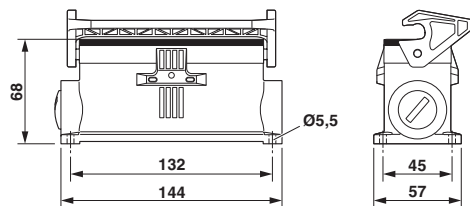

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>