



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Sensor/Actuator cable - SAC-17P-MR/ 5,0-PUR SCO - 1430750

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 17-position, PUR halogen-free, black RAL 9005, Plug angled M12 SPEEDCON, A-coded, on free cable end, Cable length: 5 m

Why buy this product

- Easy and safe: 100% electrically tested plug-in components
- Save time, thanks to installation with SPEEDCON fast locking system
- Our standard: robust halogen-free PUR cable
- Save space – with high-pos. connectors



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 STK |
| GTIN |  4 046356 456562 |

Technical data

Dimensions

| | |
|--|-------|
| Length of cable | 5 m |
| Stripping length of the free conductor end | 35 mm |

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |

General

| | |
|-----------------------|--------------|
| Rated current at 40°C | 1.5 A |
| Rated voltage | 30 V |
| Number of positions | 17 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |

Sensor/Actuator cable - SAC-17P-MR/ 5,0-PUR SCO - 1430750

Technical data

General

| | |
|------------------------------|-------------------------------|
| Standards/regulations | M12 connector IEC 61076-2-101 |
| Status display | No |
| Protective circuit/component | Unwired |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 66 |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |

Standards and Regulations

| | |
|--|---|
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |
| Resistance to oil | DIN VDE 0472 Part 803, test type B |
| Other resistance | Hydrolysis and microbe resistant as per VDE 0282 section 10 |
| Flammability rating according to UL 94 | V0 |

Cable

| | |
|------------------------------------|--|
| Conductor cross section | 17x 0.14 mm ² (Signal line) |
| AWG signal line | 26 |
| Conductor structure signal line | 18x 0.10 mm |
| Core diameter including insulation | 1 mm ±0.05 mm (Signal line) |
| Wire colors | White, brown, green, yellow, gray, pink, blue, red, black, violet, gray-pink, red-blue, white-green, brown-green, white-yellow, yellow-brown, white-gray |
| Overall twist | 17 wires twisted in layers |
| External sheath, color | black RAL 9005 |
| External cable diameter D | 8 mm |
| Number of bending cycles | 4000000 |
| Bending radius | 60 mm |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Outer sheath, material | PUR |
| Material conductor insulation | PP |
| Conductor material | Tin-plated Cu litz wires |
| Conductor resistance | 142 Ω/km |
| Special properties | Low adhesion surface |

Sensor/Actuator cable - SAC-17P-MR/ 5,0-PUR SCO - 1430750

Technical data

Cable

| | |
|---------------------------------|---|
| Resistance to oil | DIN VDE 0472 Part 803, test type B |
| Other resistance | Hydrolysis and microbe resistant as per VDE 0282 section 10 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Sensor/Actuator cable - SAC-17P-MR/ 5,0-PUR SCO - 1430750


Approvals

Approval details

EAC


Drawings

Schematic diagram




Pin assignment M12 male connector, 17-pos., male side view

Cable cross section




PUR halogen-free black [PUR]

Dimensional drawing



Plug M12 SPEEDCON, angled, shielded

Circuit diagram

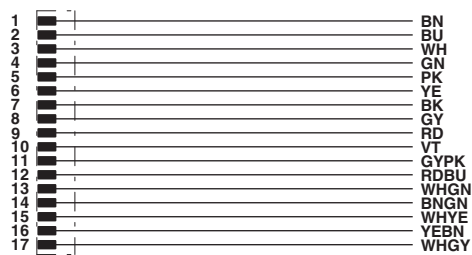

Contact assignment of the M12 plug



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|---------|----------------------------|----------------------------|
| Sensor/Actuator cable, 17-position, PUR halogen-free, black RAL 9005, Plug angled M12 SPEEDCON, A-coded, on free cable end, Cable length: 5 m | 1430750 | SAC-17P-MR/ 5,0-PUR SCO | Buy on EAN |