



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Housing - HC-B 24-KMQ-N-O1STM32 - 1460276

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON B24 coupling housing, with single locking latch, height: 70.5 mm, with 1 x M32 thread, straight cable outlet

Key Commercial Data

| | |
|--------------|---------------------|
| Packing unit | 10 STK |
| GTIN | 4 046356 696203 |

Technical data

Dimensions

| | |
|--------|---------|
| Height | 70.5 mm |
| Width | 43 mm |
| Length | 120 mm |

Ambient conditions

| | |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------------------------------|--|
| Note | For contact inserts HC-B24, BB46, BBB64, D64, DD108, M |
| Size | B24 |
| Housing type | Coupling housings |
| Locking type | With double locking latch |
| No. of cable outlets | 1 |
| Cable exit | straight |
| Screw connection | none |
| Type of the screw connection | 1x M32 |
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Material lock | High-grade steel, handle: PA-GF |
| Material grip body interlock | PA-GF |

Housing - HC-B 24-KMQ-N-O1STM32 - 1460276

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

| |
|-----|
| EAC |
|-----|

Drawings

Housing - HC-B 24-KMQ-N-O1STM32 - 1460276

Dimensional drawing

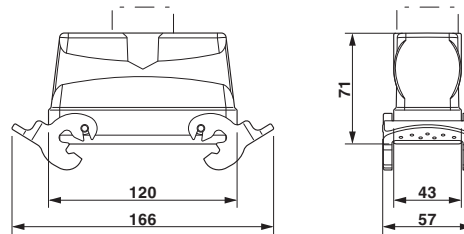

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|-------------|-----------------------|----------------------------|
| HEAVYCON B24 coupling housing, with single locking latch, height: 70.5 mm, with 1 x M32 thread, straight cable outlet | 1460276 | HC-B 24-KMQ-N-O1STM32 | Buy on EAN |