At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. HERE

Housing - VC-AL-T1-R-M20-S - 1583610

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Aluminum die-cast sleeve housing, with grommet, locking screws with knurled head, for a metric M20 cable gland, angled cable outlet, type VC1

Why buy this product

- Angled cable outlet so the cable can be routed as desired, from the side and straight
- Aluminum housing with extended cabling space for high-position and power contact inserts

Key Commercial Data

Packing unit	5 STK
GTIN	4 046356 183246

Technical data

Dimensions

Height	72 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C

General

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Type	VC1
Color	gray aluminum
Locking type	Screw locking, knurled head
Tightening torque, mounting screw	1.5 Nm ±0.3 Nm
Fixing screws	M4
No. of cable outlets	1
Cable exit	Angled
Screw connection	none
Type of the screw connection	M20 x 1.5
Housing material	Aluminum die-cast
Seal material	NBR, conductive
Material of locking screw	Nickel-plated brass

Housing - VC-AL-T1-R-M20-S - 1583610

Technical data

General

Flammability rating according to UL 94	V0

Standards and Regulations

Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27371205
eCl@ss 7.0	27371205
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Housing - VC-AL-T1-R-M20-S - 1583610

Approvals

Approval details

EAC

Drawings

Dimensional drawing

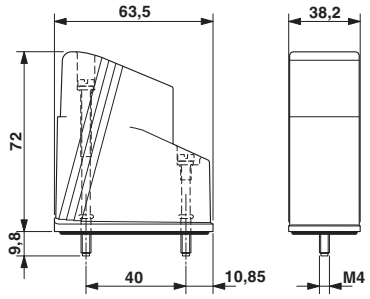

Dimensional drawing

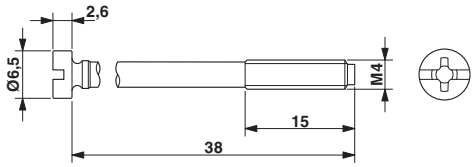

Dimensional drawing

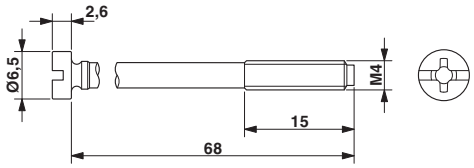

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Aluminum die-cast sleeve housing, with grommet, locking screws with knurled head, for a metric M20 cable gland, angled cable outlet, type VC1	1583610	VC-AL-T1-R-M20-S	Buy on EAN