



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Panel feed-through terminal block - PLW 16-6/ 3-10 - 1821067

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Connection method: Push-lock connection, Push-in connection, Load current : 41 A, Cross section: 2.5 mm² - 16 mm², AWG 14 - 4, Width: 54.4 mm, Color: gray

Key Commercial Data

Packing unit	15 STK
GTIN	 4 046356 788199

Technical data

General

Number of levels	1
Number of connections	6
Nominal cross section	16 mm ²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Maximum load current	41 A
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I _N	41 A
Maximum load current	41 A
Nominal voltage U _N	1000 V
Open side panel	No
Number of positions	3

Dimensions

Width	54.4 mm
Plate thickness	19.26 mm

Connection data

Connection side	Outside
-----------------	---------

Panel feed-through terminal block - PLW 16-6/ 3-10 - 1821067

Technical data

Connection data

Connection method	Push-lock connection
Conductor cross section solid min.	2.5 mm ²
Conductor cross section solid max.	16 mm ²
Conductor cross section flexible min.	2.5 mm ²
Conductor cross section flexible max.	25 mm ²
Conductor cross section AWG min.	14
Conductor cross section AWG max.	4
Conductor cross section flexible, with ferrule without plastic sleeve min.	2.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	16 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	16 mm ²
Stripping length	18 mm
Connection side	Inside
Connection method	Push-in connection
Conductor cross section flexible min.	1.5 mm ²
Conductor cross section flexible max.	6 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	6 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	6 mm ²
Stripping length	15 mm

Standards and Regulations

Connection in acc. with standard	IEC 60947-7-1
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27141111
eCl@ss 4.1	27141111
eCl@ss 5.0	27141134
eCl@ss 5.1	27141134
eCl@ss 6.0	27141134
eCl@ss 7.0	27141134
eCl@ss 8.0	27141134

ETIM

ETIM 3.0	EC001283
ETIM 4.0	EC001283
ETIM 5.0	EC001283

Panel feed-through terminal block - PLW 16-6/ 3-10 - 1821067

Classifications

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Approvals

Approvals

Approvals

cULus Recognized

Ex Approvals


Approvals submitted

Approval details

cULus Recognized

Drawings


Dimensional drawing

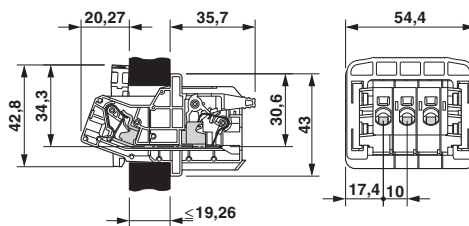

Dimension 54.4 mm for 3-pos. version;
4-pos.: 64.4 mm
5-pos.: 74.4 mm

Panel feed-through terminal block - PLW 16-6/ 3-10 - 1821067

Dimensional drawing

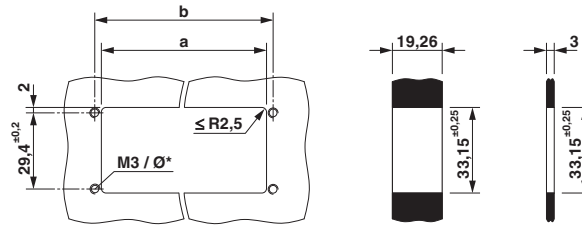

Dimension a = 43.9 mm ±0.25

Dimension b = 49 mm ±0.2

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Panel feed-through terminal block, Connection method: Push-lock connection, Push-in connection, Load current : 41 A, Cross section: 2.5 mm ² - 16 mm ² , AWG 14 - 4, Width: 54.4 mm, Color: gray	1821067	PLW 16-6/ 3-10	Buy on EAN