



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Base strip - PTSM 0,5/ 3-HTB-2,5-SMD WH R44 - 1830139


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.5 mm, Contact surface: Tin, Mounting: SMD soldering

Why buy this product

- Compatible with PTSM.../PTPM... plugs
- High current carrying capacity of 6 A
- Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- Rugged solder anchor for secure, mechanical fixing to the surface
- Specifically designed for use in dedicated SMT processes

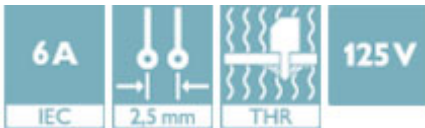

Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 330 STK |
| Minimum order quantity | 330 STK |
| GTIN |  4 046356 884532 |

Technical data

Dimensions

| | |
|-------------|---------|
| Pitch | 2.50 mm |
| Dimension a | 5 mm |

General

| | |
|-----------------------------|--------|
| Insulating material group | I |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/3) | 125 V |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 250 V |
| Nominal current I_N | 6 A |

Base strip - PTSM 0,5/ 3-HTB-2,5-SMD WH R44 - 1830139

Technical data

General

| | |
|--|-------|
| Maximum load current | 6 A |
| Insulating material | HT PA |
| Flammability rating according to UL 94 | V0 |
| Number of positions | 3 |

Standards and Regulations

| | |
|--|----|
| Connection in acc. with standard | UL |
| Flammability rating according to UL 94 | V0 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

Approvals

Approvals

Approvals

UL Recognized / UL Recognized

Ex Approvals

Base strip - PTSM 0,5/ 3-HTB-2,5-SMD WH R44 - 1830139

Approvals

Approvals submitted


Approval details

| | |
|--------------------------------|-------|
| UL Recognized | |
| Nominal current I _N | 5 A |
| Nominal voltage U _N | 150 V |


| | |
|--------------------------------|-------|
| UL Recognized | |
| | B |
| Nominal current I _N | 6 A |
| Nominal voltage U _N | 150 V |

Drawings

Drilling diagram



Dimensional drawing

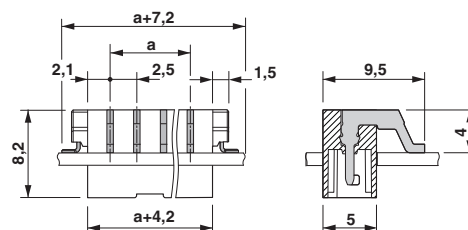

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|---|-------------|---------------------------------------|----------------------------|
| Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 3, Pitch: 2.5 mm, Contact surface: Tin, Mounting: Taped SMD/THT/THR components | 1830139 | PTSM 0,5/ 3- HTB-2,5-SMD WH R44 | Buy on EAN |