



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Interface module - FLKM-D25 SUB/B/KDS3-MT/TU810/P - 2304539

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module for ABB S800 I/O, with knife disconnect terminal blocks and specific marking (+1, B1, C1, +2, B2, C2, ... +8, B8, C8)

Why buy this product

- Eight positive terminal blocks with knife disconnection (TU810/P)
- Eight negative terminal blocks with knife disconnection (TU810)
- One positive and negative terminal block with knife disconnection per channel (TU830)

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 949129

Technical data

Dimensions

Width	126.5 mm
Height	90 mm
Depth	61 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	< 50 V AC
	60 V DC
Max. perm. current (per branch)	2 A
Max. permissible current (separate power supply)	4 A (8 A L1+/L2+)
Number of positions	25
Status display	No
Mounting position	any
Assembly instructions	In rows with zero spacing
Degree of protection	IP00
Standards/regulations	DIN EN 50178

Interface module - FLKM-D25 SUB/B/KDS3-MT/TU810/P - 2304539

Technical data

General

	IEC 60664
	IEC 62103
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV (Functional insulation)
Degree of pollution	2
Overvoltage category	II

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection with disconnect knife
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	25

Supported controller

Controller	ABB S800 I/O
- suitable I/O card	DI810
	DI811
	DI818
	DI830
	DI831
	DI840
	DI885
	DO814
	DO818
	AI810
	AI815
	AI845

Standards and Regulations

Standards/regulations	DIN EN 50178
	IEC 60664
	IEC 62103
Degree of pollution	2

Interface module - FLKM-D25 SUB/B/KDS3-MT/TU810/P - 2304539

Technical data

Standards and Regulations

Overvoltage category	II
----------------------	----

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM


ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Drawings

Circuit diagram

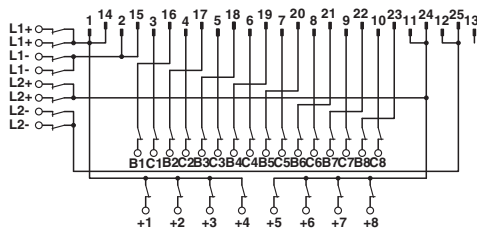

FLKM-D25 SUB/B/KDS3-MT/TU810/P connection scheme

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE module for ABB S800 I/O, with knife disconnect terminal blocks and specific marking (+1, B1, C1, +2, B2, C2, ... +8, B8, C8)	2304539	FLKM-D25 SUB/B/ KDS3-MT/TU810/P	Buy on EAN