



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Trunk module - FB-ET - 2316048

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Trunk module for Foundation Fieldbus and PROFIBUS PA expansions with terminator



## Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 466165

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---------------------------------------------------------------------------

### Dimensions

Width	17.5 mm
Height	99.1 mm
Depth	70.4 mm

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Degree of protection	IP20

### General

Standards/regulations	IEC 60529, IEC 61158-2
	NE21
	EN 61326, EN 60068-2-27, EN 60068-2-6
	FF-846

# Trunk module - FB-ET - 2316048

## Technical data

### General

Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
Net weight	102.7 g
Color	green
Conformance	CE-compliant, additionally EN 61326
Fieldbus Foundation	FF-846

### Power supply

Nominal supply voltage	24 V DC (IIC)
	32 V DC (IIB)
Supply voltage range	24 V DC ... 32 V DC
Max. current consumption	12 mA (with terminator)
Typical current consumption	8 mA (without termination resistor)

### Serial interface

Interface 1	Foundation Fieldbus and PROFIBUS PA Segment
Connection method	Pluggable COMBICON screw connection for each spur
Termination resistor	100 Ω, external removable plug included
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Surge protection	Active if voltage exceeds 39 V (typ.) or 41 V (max.)
Voltage drop trunk line / outputs	≤ 0.2 V

### Safety data

Input voltage U <sub>i</sub>	17.5 V (for FB-2SP in a FNICO/FISCO ic system)
ATEX	Sira 08ATEX4302X; II 3G Ex nA IIC T4 Gc II 3G Ex ic IIC T4 Gc, FISCO ic II 3G Ex nL IIC T4 Gc, FNICO
IECEX	IECEX SIR 08.0109X; Ex nA IIC T4 Gc; Ex ic IIC T4 Gc, FISCO ic; Ex nL IIC T4 Gc, FNICO
CSA, USA/Canada	Class I, Division 2, Groups A,B,C,D; Ex nA IIC T4 Class I, Zone 2, AEx nA IIC T4

### Standards and Regulations

Shock	15g, 11 ms
Standards/regulations	IEC 60529, IEC 61158-2
	NE21
	EN 61326, EN 60068-2-27, EN 60068-2-6
	FF-846
Vibration (operation)	1g, 10 Hz - 150 Hz
Conformance	CE-compliant, additionally EN 61326

# Trunk module - FB-ET - 2316048

## Technical data

### Standards and Regulations

Fieldbus Foundation	FF-846
ATEX	Sira 08ATEX4302X; II 3G Ex nA IIC T4 Gc II 3G Ex ic IIC T4 Gc, FISCO ic II 3G Ex nL IIC T4 Gc, FNICO
IECEX	IECEX SIR 08.0109X; Ex nA IIC T4 Gc; Ex ic IIC T4 Gc, FISCO ic; Ex nL IIC T4 Gc, FNICO
CSA, USA/Canada	Class I, Division 2, Groups A,B,C,D; Ex nA IIC T4 Class I, Zone 2, AEx nA IIC T4

## Classifications

### eCl@ss

eCl@ss 4.0	27250203
eCl@ss 4.1	27250203
eCl@ss 5.0	27250203
eCl@ss 5.1	27259205
eCl@ss 6.0	27259090
eCl@ss 7.0	27259090
eCl@ss 8.0	27242610

### ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600


### UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	43201553


## Drawings

## Trunk module - FB-ET - 2316048

Dimensional drawing

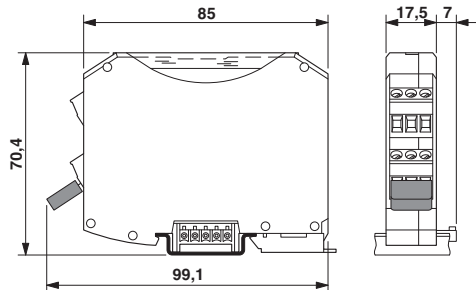

Circuit diagram

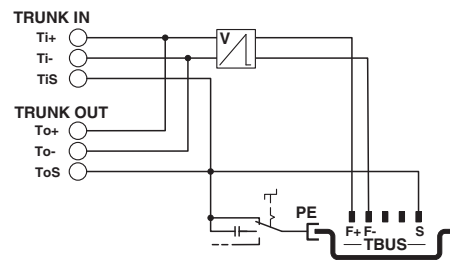

Connection diagram: FB-ET

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Trunk module for Foundation Fieldbus and PROFIBUS PA expansions with terminator	2316048	FB-ET	<a href="#">Buy on EAN</a>