



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Device coupler - FB-ISO - 2316064

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device coupler for Foundation Fieldbus and PROFIBUS PA. Provides intrinsically safe FISCO connection to a single end device.

Why buy this product

- Field barrier



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 466141

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	17.5 mm
Height	89.7 mm
Depth	70.4 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Degree of protection	IP20

General

Electrical isolation	500 V AC (between input and output, routine test)
Standards/regulations	IEC 60529, IEC 61158-2
	NE21

Device coupler - FB-ISO - 2316064

Technical data

General

	EN 61326, EN 60068-2-27, EN 60068-2-6
	VI-7-2 category C, EMC1
Mounting position	On horizontal DIN rail NS 35 in acc. with EN 60715
Net weight	129.7 g
Color	green
Conformance	CE-compliant, additionally EN 61326

Power supply

Supply voltage range	17 V DC ... 32 V DC (input on trunk line side)
Typical current consumption	10 mA

Serial interface

Interface 1	Foundation Fieldbus and PROFIBUS PA Segment
Connection method	Pluggable COMBICON screw connection for each spur
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12
Output nominal voltage	≥ 10 V (each spur)
Output current	15 mA (each spur, adjustable via selector switch)
Maximum output current	22 mA (each spur, adjustable via selector switch)

Safety data

Input voltage U _i	32 V
Group	IIC
Max. external capacity C _o	0.36 μF
Group	IIB
Max. external capacity C _o	2.11 μF
Group	IIB
Max. external inductivity L _o	660 μH
Group	IIC
Max. external inductivity L _o	220 μH
ATEX	# II 3(3) G Ex nA [nL Gc] IIC T4 Gc, FNICO power supply (spur)
	# II 3(1) GD Ex nA [ja Ga Da] IIC T4 Gc, FISCO power supply (spur)
IECEX	Ex nA [nL Gc] IIC T4 Gc, FNICO power supply (spur)
	Ex nA [ja Ga Da] IIC T4 Gc, FISCO power supply (spur)

Standards and Regulations

Shock	15g, 11 ms
Standards/regulations	IEC 60529, IEC 61158-2
	NE21

Device coupler - FB-ISO - 2316064

Technical data

Standards and Regulations

	EN 61326, EN 60068-2-27, EN 60068-2-6
	VI-7-2 category C, EMC1
Electrical isolation	500 V AC (between input and output, routine test)
Vibration (operation)	1g, 10 Hz - 150 Hz
Conformance	CE-compliant, additionally EN 61326
Group	IIC
	IIB
	IIB
	IIC
ATEX	# II 3(3) G Ex nA [nL Gc] IIC T4 Gc, FNICO power supply (spur)
	# II 3(1) GD Ex nA [ja Ga Da] IIC T4 Gc, FISCO power supply (spur)
IECEX	Ex nA [nL Gc] IIC T4 Gc, FNICO power supply (spur)
	Ex nA [ja Ga Da] IIC T4 Gc, FISCO power supply (spur)

Classifications

eCl@ss

eCl@ss 4.0	27250203
eCl@ss 4.1	27250203
eCl@ss 5.0	27250203
eCl@ss 5.1	27259205
eCl@ss 6.0	27259090
eCl@ss 7.0	27259090
eCl@ss 8.0	27242610

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001600
ETIM 4.0	EC001600
ETIM 5.0	EC001600


UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	43201553


Drawings

Device coupler - FB-ISO - 2316064

Dimensional drawing

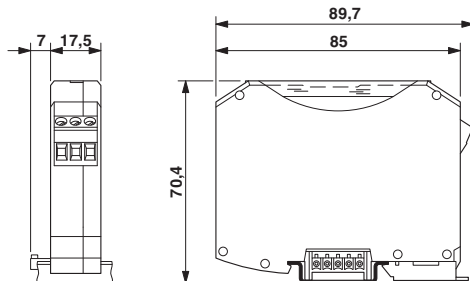

Circuit diagram



Connection diagram: FB-ISO

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Device coupler for Foundation Fieldbus and PROFIBUS PA. Provides intrinsically safe FISCO connection to a single end device.	2316064	FB-ISO	Buy on EAN