



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Distributed I/O device - FLS PB M12 DO 8 M12-2A - 2736110

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The stand-alone device for PROFIBUS has 8 digital outputs each with a load capacity of 2 A. The M12 connection is established using fast connection technology. The 24 V DC supply is protected against short circuit and overload.

### Why buy this product

- Flexible power supply concept
- Diagnostic and status indicators
- SPEEDCON fast locking system
- Short-circuit and overload protection
- Consistent connection via M12 connectors
- Directly accessible address encoding switch



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 899578

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	60 mm
Height	178 mm
Depth	49.3 mm
Drill hole spacing	168 mm

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (storage/transport)	95 %
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)

# Distributed I/O device - FLS PB M12 DO 8 M12-2A - 2736110

## Technical data

### Ambient conditions

Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP65/IP67

### General

Net weight	337.74 g
Mounting type	Wall mounting

### Interfaces

Fieldbus system	PROFIBUS DP
Designation	PROFIBUS DP
Connection method	2x M12 connectors, B-coded
Designation connection point	Copper cable
Transmission speed	9,6 kBit/s ... 12 MBit/s (Automatic baud rate detection)
Transmission physics	PROFIBUS-DP-compliant copper cable
Address area assignment	1 ... 99, can be set
Number of positions	5

### Power supply for module electronics

Connection method	M12 connector, (A-coded)
Designation	$U_L$
Supply voltage	24 V DC
Supply voltage range	18 V DC ... 30 V DC (including ripple)

### Fieldline potentials

Voltage supply $U_L$	24 V DC
Power supply at $U_L$	4 A
Current consumption from $U_L$	typ. 40 mA
	max. 100 mA
Voltage supply $U_S$	24 V DC
Power supply at $U_S$	max. 4 A
Current consumption from $U_S$	typ. 3 mA
	max. 700 mA
Voltage supply $U_{A11}$	24 V DC
Power supply at $U_{A11}$	max. 4 A
Current consumption at $U_{A11}$	typ. 12 mA (plus actuator current)
	max. 4 A
Voltage supply $U_{A12}$	24 V DC
Power supply at $U_{A12}$	max. 4 A
Current consumption at $U_{A12}$	typ. 12 mA (plus actuator current)
	max. 4 A
Voltage supply $U_{A21}$	24 V DC
Power supply at $U_{A21}$	max. 4 A

# Distributed I/O device - FLS PB M12 DO 8 M12-2A - 2736110

## Technical data

### Fieldline potentials

Current consumption at $U_{A21}$	typ. 12 mA (plus actuator current)
	max. 4 A
Voltage supply $U_{A22}$	24 V DC
Power supply at $U_{A22}$	max. 4 A
Current consumption at $U_{A22}$	typ. 12 mA (plus actuator current)
	max. 4 A

### Digital outputs

Output name	Digital outputs
Connection method	M12 connector
	2, 3-wire
Number of outputs	8
Protective circuit	Short-circuit protection
Output voltage	24 V DC
Maximum output current per channel	2 A

### Standards and Regulations

Test section	24 V supply (bus logics) / Bus connection
	24 V supply (bus logics) / FE 500 V AC 50 Hz 1 min.
	24 V supply (bus logics) / Digital outputs (actuator supply) 500 V AC 50 Hz 1 min.
	Bus connection / FE 500 V AC 50 Hz 1 min.
	Bus connection / Digital outputs (actuator supply) 500 V AC 50 Hz 1 min.
	FE / Digital outputs (actuator supply) 500 V AC 50 Hz 1 min.
Connection in acc. with standard	CUL
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

## Classifications

### eCl@ss

eCl@ss 4.0	27250302
eCl@ss 4.1	27250302
eCl@ss 5.0	27250302
eCl@ss 5.1	27242604
eCl@ss 6.0	27242604
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

### ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599

# Distributed I/O device - FLS PB M12 DO 8 M12-2A - 2736110

## Classifications

### ETIM

ETIM 4.0	EC001599
ETIM 5.0	EC001599

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / PROFIBUS / EAC / EAC / cULus Recognized

---

#### Ex Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Approvals submitted

---

### Approval details

UL Recognized
---------------

cUL Recognized
----------------

PROFIBUS
----------

EAC
-----

EAC
-----


# Distributed I/O device - FLS PB M12 DO 8 M12-2A - 2736110

## Approvals


cULus Recognized US

## Drawings

Connection diagram

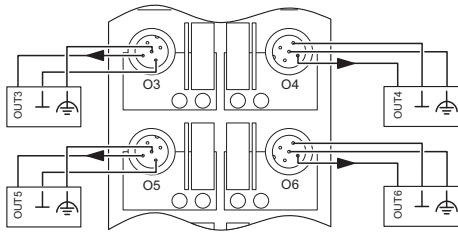

Dimensional drawing

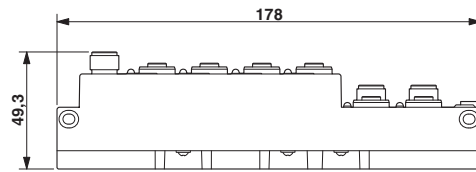

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

<b>Product</b>	<b>Code</b>	<b>Reference</b>	<b>Product link</b>
The stand-alone device for PROFIBUS has 8 digital outputs each with a load capacity of 2 A. The M12 connection is established using fast connection technology. The 24 V DC supply is protected against short circuit and overload.	2736110	FLS PB M12 DO 8 M12-2A	<a href="#">Buy on EAN</a>