



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Distributed I/O device - FLS PB M12 IOL 4 M12 - 2736987

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The local bus device has 4 IO-Link ports of 200 mA. Functions: parallel processing of service and process data, 500 kbaud/2 Mbaud selection, short-circuit and overload protection, 800 mA nominal current, M12 fast connection technology.

Product Description

The device serves to connect IO-Link devices.

Why buy this product

- Flexible power supply concept
- Short-circuit and overload protection
- Diagnostic and status indicators
- Directly accessible address encoding switch
- Consistent connection via M12 connectors



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 147323

Technical data

Dimensions

Width	70 mm
Height	178 mm
Depth	49.3 mm
Drill hole spacing	168 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (storage/transport)	95 %
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above sea level)
Degree of protection	IP65/IP67

General

Distributed I/O device - FLS PB M12 IOL 4 M12 - 2736987

Technical data

General

Net weight	280 g
Mounting type	Wall mounting

Interfaces

Fieldbus system	PROFIBUS DP
Designation	PROFIBUS DP
Connection method	M12 connector, B-coded
Designation connection point	Copper cable
Transmission speed	9,6 kBit/s ... 12 MBit/s (Automatic baud rate detection)
Transmission physics	PROFIBUS-DP-compliant copper cable
Address area assignment	1 ... 126, adjustable
Number of positions	5

Power supply for module electronics

Connection method	M12 connector
Designation	U _L
Supply voltage	24 V DC
Supply voltage range	18 V DC ... 30 V DC (including ripple)

Fieldline potentials

Voltage supply U _L	24 V DC
Power supply at U _L	max. 4 A
Current consumption from U _L	typ. 75 mA (At 500 kBaud)
	max. 100 mA (At 500 kBaud)
Voltage supply U _S	24 V DC
Power supply at U _S	max. 4 A
Current consumption from U _S	typ. 25 mA (plus power supply for sensors)
	max. 825 mA

Digital inputs

Connection method	3-conductor
-------------------	-------------

Standards and Regulations

Mechanical tests	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 Load 30g, half sine wave, positive and negative per direction
	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g in each space direction

Classifications

eCl@ss

eCl@ss 4.0	27250302
eCl@ss 4.1	27250302
eCl@ss 5.0	27250302

Distributed I/O device - FLS PB M12 IOL 4 M12 - 2736987

Classifications

eCl@ss

eCl@ss 5.1	27242604
eCl@ss 6.0	27242604
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

ETIM


ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599

UNSPSC


UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Drawings

Connection diagram

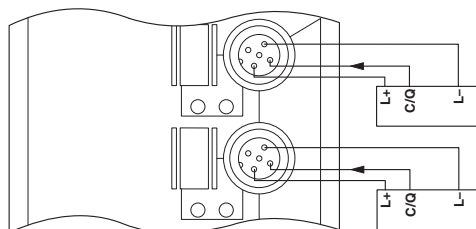

Dimensional drawing

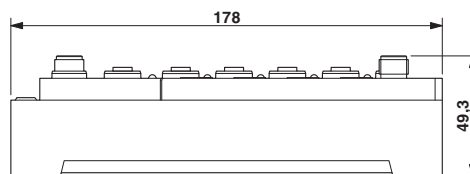



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
The local bus device has 4 IO-Link ports of 200 mA. Functions: parallel processing of service and process data, 500 kbaud/2 Mbaud selection, short-circuit and overload protection, 800 mA nominal current, M12 fast connection technology.	2736987	FLS PB M12 IOL 4 M12	Buy on EAN