



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



INTERBUS-ST digital input/output module, eight inputs, 24 V DC, eight outputs, 24 V DC, 2 A, IP20 degree of protection, consisting of: Terminal part with screw connection and module electronics

Product Description

INTERBUS ST digital input and output modules

The digital INTERBUS input/output modules provide the option of connecting 8 sensors and 8 actuators with two or three-wire connections. The electronics module is a plug-in type. In the event of a malfunction, the passive basic termination block remains on the DIN rail and the active electronics module can be replaced within a few seconds. The modules are protected against polarity reversal and the outputs are additionally protected against short-circuiting with fuses. The status of the fuses is monitored and any errors which occur are passed on to the control system. The contact with the protective earth ground is made directly when the module is snapped onto the DIN rail. Input/output status LEDs and bus diagnostic displays on the top side of the module electronics give information on the condition of the module at any time. All the modules can be labeled individually on the large, pull-out labeling field. The insert cards can be labeled by hand, plotter, or printer. The terminal points can also be labeled individually with Zack strip.

Why buy this product

- 8 digital outputs
- 8 digital inputs
- Connection of actuators in 3-wire technology
- Connection of sensors in 3-wire technology
- Electrical isolation
- Diagnostic and status indicators
- DIN rail mounting

Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 062880

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	118 mm
Height	117 mm

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Technical data

Dimensions

Depth	116 mm
-------	--------

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	30 % ... 75 % (non-condensing)
Permissible humidity (storage/transport)	30 % ... 95 % (non-condensing)
Air pressure (operation)	86 kPa ... 108 kPa (1500 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (3500 m above sea level)
Degree of protection	IP20

Interfaces

Fieldbus system	Lokalbus
Designation	ST local bus
Connection method	ST local bus connector
Transmission speed	500 kBit/s

Digital inputs

Input name	Digital inputs
Connection method	Screw connection
	3-conductor
Number of inputs	8
Typical response time	3 ms (typ.)
Protective circuit	Overload protection Fuse in header
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC
Nominal input current at U _{IN}	typ. 5 mA (per channel)

Digital outputs

Output name	Digital outputs
Connection method	Screw connection
	3-conductor
Number of outputs	8
Protective circuit	Short-circuit protection Fuse
Maximum output current per channel	2 A
Maximum output current per module / terminal block	16 A
Maximum output current per group	8 A

Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC (including ripple)
Ripple	3.6 V _{pp} within the allowable voltage range

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Technical data

Power supply for module electronics

Current consumption	0.2 A
Communications power U_L	9 V DC
Current consumption	max. 100 mA

General

Net weight	770 g
Mounting type	DIN rail

Standards and Regulations

Test section	Bus logic / I/O 500 V AC 50 Hz 1 min.
	I/O / Ground conductor 500 V AC 50 Hz 1 min.
Connection in acc. with standard	CUL
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

Classifications

eCl@ss

eCl@ss 4.0	27250302
eCl@ss 4.1	27250302
eCl@ss 5.0	27250302
eCl@ss 5.1	27242604
eCl@ss 6.0	27242604
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized	
mm ² /AWG/kcmil	30-12


cUL Recognized	
mm ² /AWG/kcmil	30-12

EAC

cULus Recognized


Drawings

Connection diagram

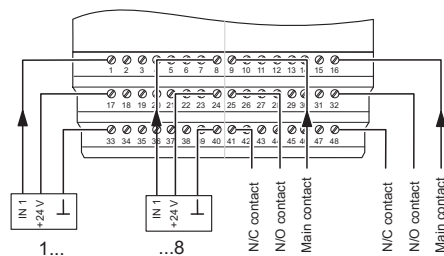


I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Block diagram

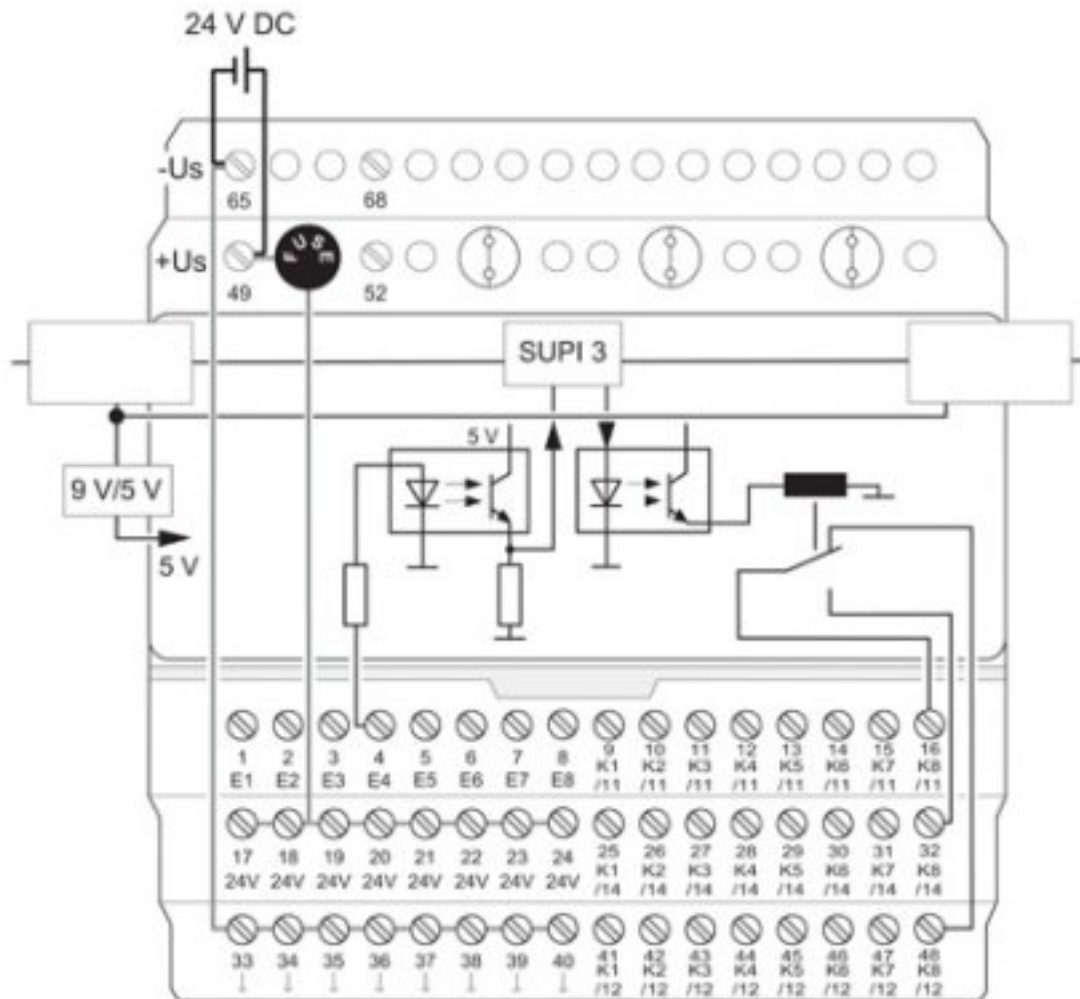

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Dimensional drawing

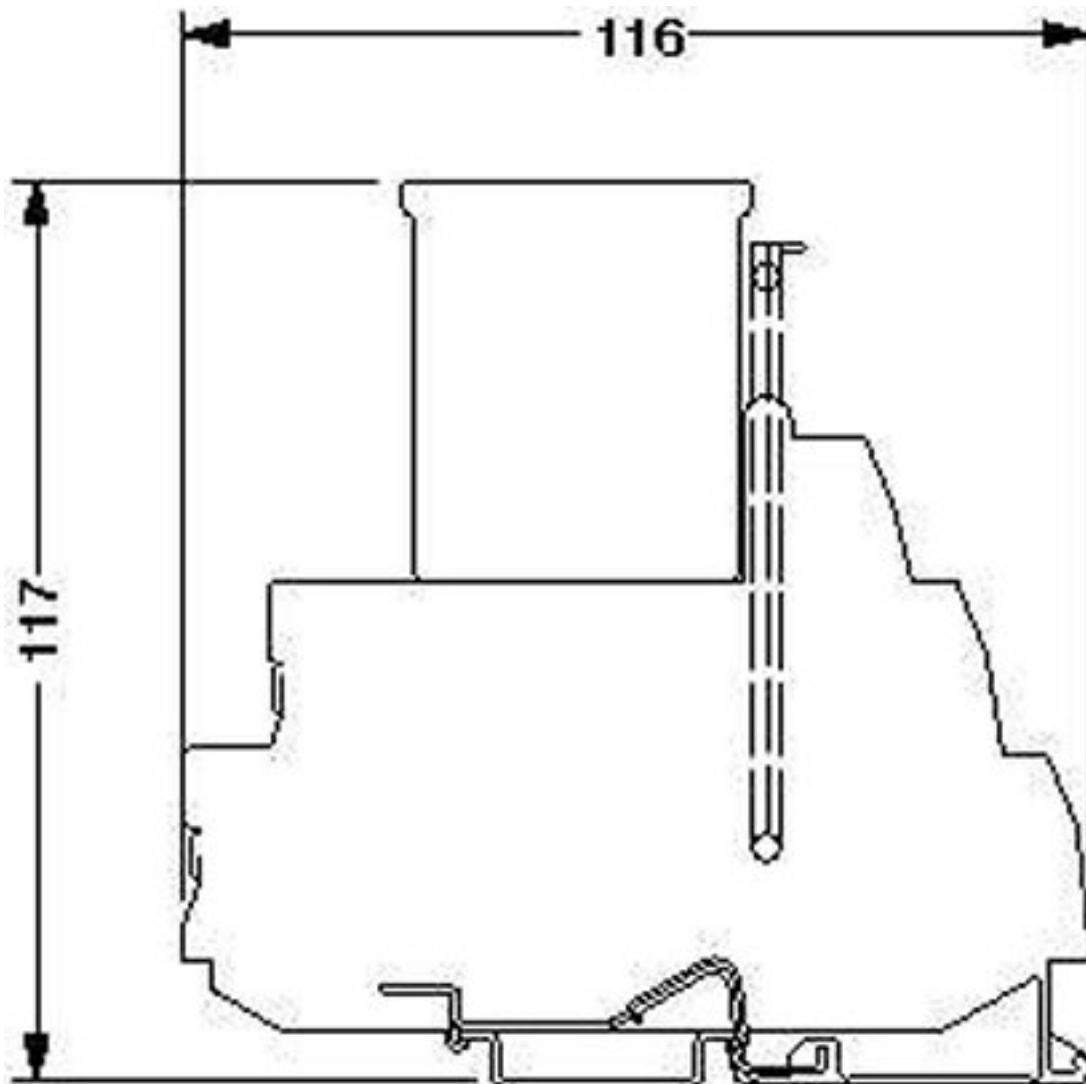

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
INTERBUS-ST digital input/output module, eight inputs, 24 V DC, eight outputs, 24 V DC, 2 A, IP20 degree of protection, consisting of: Terminal part with screw connection and module electronics	2753708	IB ST 24 DIO 8/8/3-2A	Buy on EAN