



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Surge protection device - TT-UK5/ 48AC - 2794767

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Modular terminal block with surge voltage fine protection between clamping connector and DIN rail, nominal voltage: 48 V AC, for mounting on NS 32 or NS 35/7.5, terminal width: 6.2 mm, terminal height: 47 mm

The illustration shows version TT-UK5- 24 DC

### Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 072933

### Technical data

#### Dimensions

Height	47 mm
Width	6.2 mm
Length	42.5 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

#### General

Housing material	PA
Flammability rating according to UL 94	V2
Color	black
Mounting type	DIN rail/G-profile rail
Type	Single-level terminal block
Number of positions	1
Direction of action	Line-Earth Ground

#### Protective circuit

IEC test classification	C3
VDE requirement class	C3
Nominal voltage $U_N$	48 V AC
Maximum continuous voltage $U_C$	77 V DC

# Surge protection device - TT-UK5/ 48AC - 2794767

## Technical data

### Protective circuit

	55 V AC
Maximum continuous voltage $U_c$ (wire-ground)	55 V AC
	77 V DC
Nominal current $I_N$	32 A (50 °C)
Residual current $I_{PE}$	$\leq 5 \mu A$
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Earth)	62 A
Total surge current (8/20) $\mu s$	62 A
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (Core-Earth)	62 A
Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (Core-Earth)	12 A
Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) static	$\leq 120 V$
Residual voltage at $I_n$ (conductor-ground)	$\leq 162 V$
Response time $t_A$ (Core-Earth)	$\leq 1 ns$
Cut-off frequency $f_g$ (3 dB), asym. (PE) in 150 Ohm system	typ. 2.9 MHz
Capacity (Core-Earth)	$\leq 0.63 nF$
Impulse durability (conductor-ground)	C3 - 10 A

### Connection data

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	8 mm
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	4 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807

# Surge protection device - TT-UK5/ 48AC - 2794767

## Classifications

### eCl@ss

eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

---

#### Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

CSA	
mm <sup>2</sup> /AWG/kcmil	28-10
Nominal current I <sub>N</sub>	34 A
Nominal voltage U <sub>N</sub>	48 V

# Surge protection device - TT-UK5/ 48AC - 2794767

## Approvals

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-10
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	48 V


cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-10
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	48 V

EAC

cULus Recognized


## Drawings

Circuit diagram



## Surge protection device - TT-UK5/ 48AC - 2794767

Schematic diagram

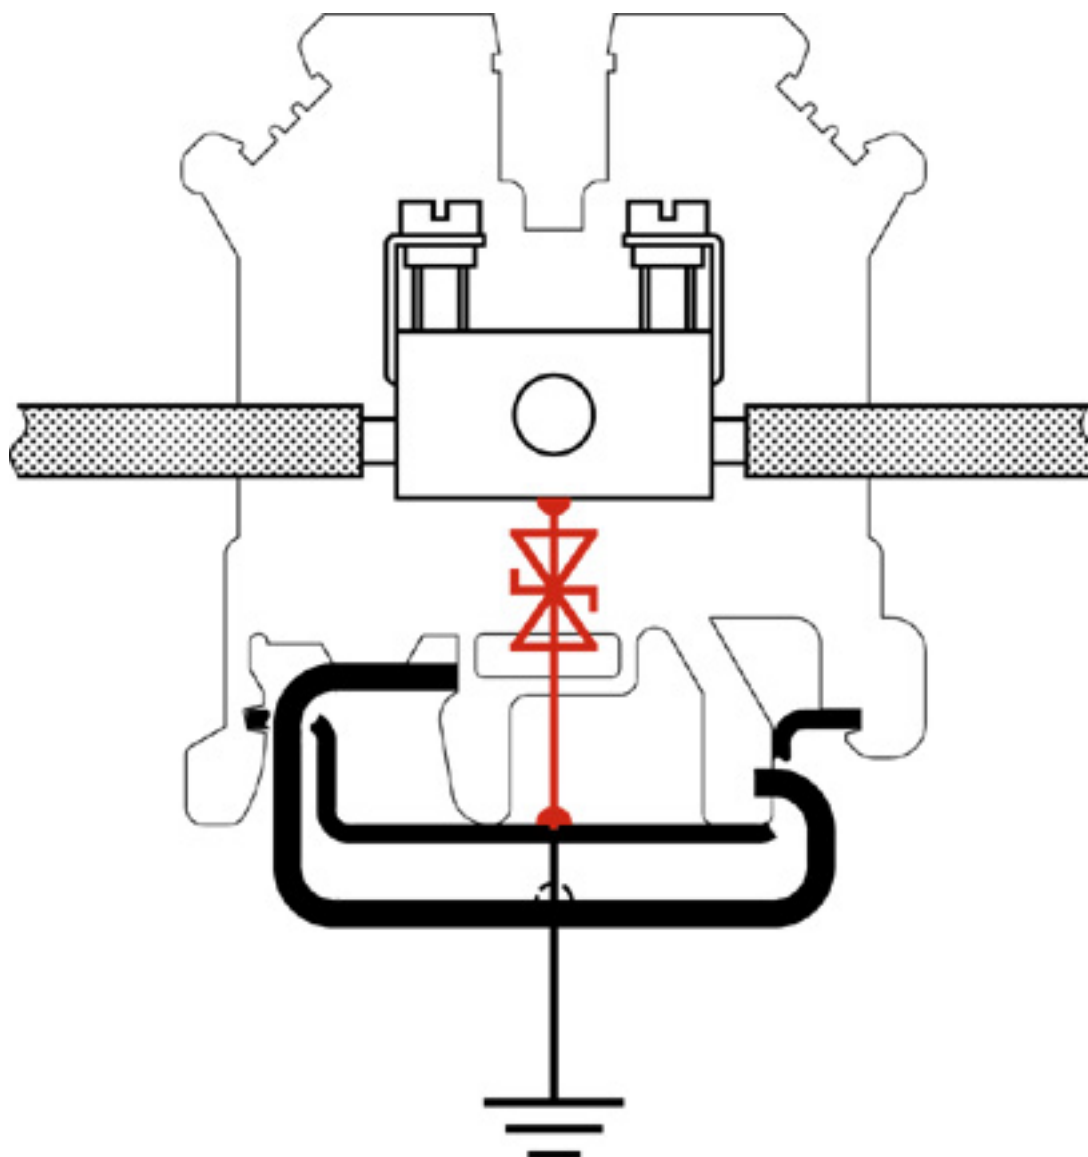

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Modular terminal block with surge voltage fine protection between clamping connector and DIN rail, nominal voltage: 48 V AC, for mounting on NS 32 or NS 35/7.5, terminal width: 6.2 mm, terminal height: 47 mm	2794767	TT-UK5/ 48AC	<a href="#">Buy on EAN</a>