



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Electronic housing - ME MAX 22,5 F G 3-3 KMGY - 2869388

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Complete housing without vents, Cross connection: DIN rail bus connector, Color: light gray, Width: 22.5 mm, Constructional height: 92 mm, Number of positions cross connector: 5


The illustration shows the housing versions

Why buy this product

- Item is from the ME-MAX product range
- Easy mounting
- Available in overall widths from 6.2 mm to 90 mm, modular extension is possible
- Inflammability class V0 according to UL 94
- Variety of connection technologies
- Can be mounted on the DIN rail
- Optional with bus connector for DIN rail mounting as well as power connection system



Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 017918 975111

Technical data

General

Housing type	Complete housing
Housing material	Polyamide
Color	light gray

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C (depending on power dissipation)
---------------------------------	--

Dimensions

Length	85 mm
Constructional height	92 mm

Electronic housing - ME MAX 22,5 F G 3-3 KMGY - 2869388

Technical data

Dimensions

Width	22.5 mm
-------	---------

Technical data

Connection in acc. with standard	CUL
Indicator1	CUL1
Flammability rating according to UL 94	V0
Power dissipation without gap	5.5 W
Power dissipation with 20 mm gap	9.6 W
Number of positions	24

Standards and Regulations

Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182702
eCl@ss 8.0	27182702
eCl@ss 9.0	27182702

ETIM

ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC001031

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Electronic housing - ME MAX 22,5 F G 3-3 KMGY - 2869388

Approvals

Approvals


UL Recognized / cUL Recognized / UL Recognized / cULus Recognized

Ex Approvals


Approvals submitted

Approval details

UL Recognized 


cUL Recognized 

UL Recognized


cULus Recognized 

Drawings

Dimensional drawing

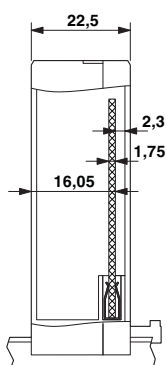


Dimensional drawing

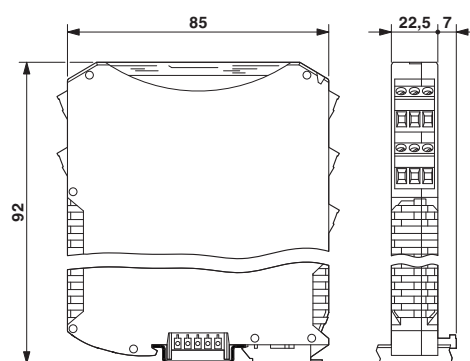


Housing inner dimensions ME MAX... Flat/extra-flat

Electronic housing - ME MAX 22,5 F G 3-3 KMGY - 2869388

Dimensional drawing

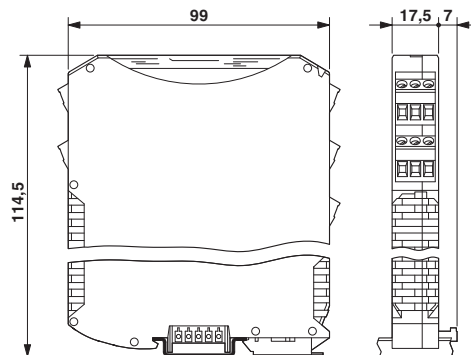


Dimensional drawing

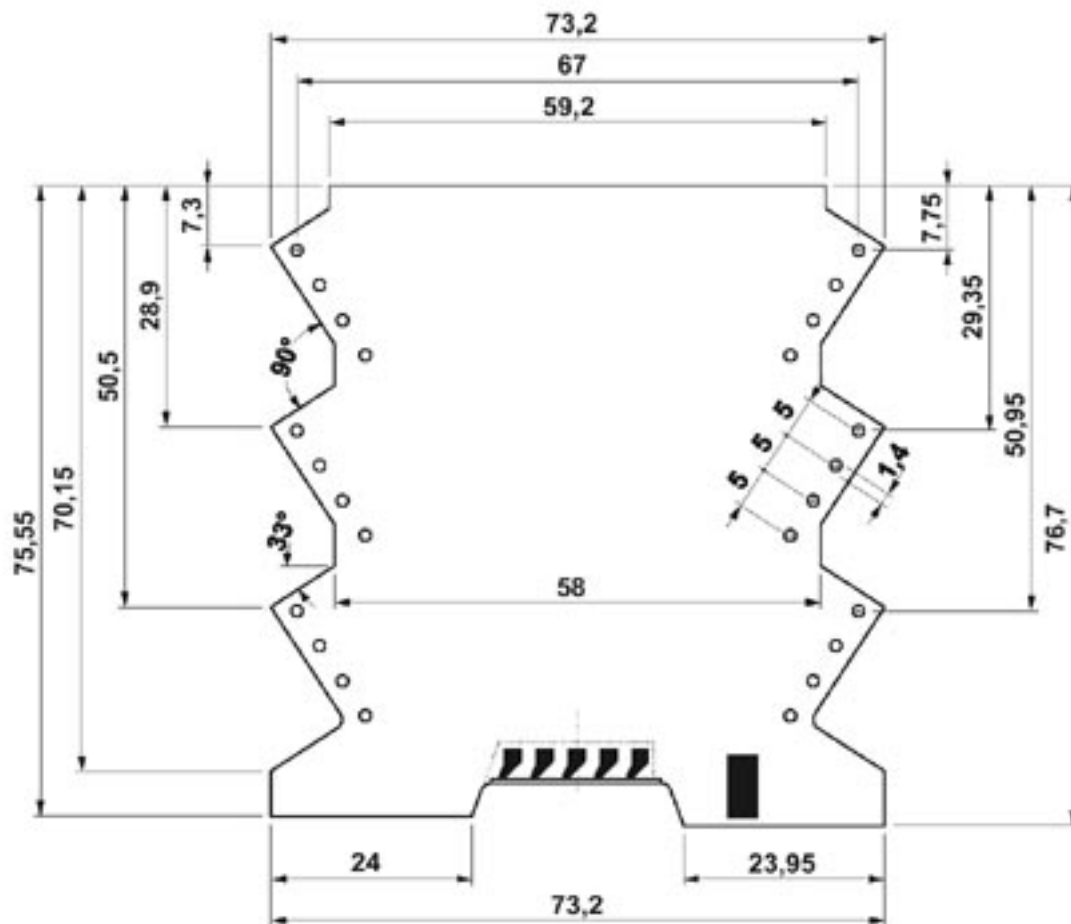

Dimensional drawing of the ME MAX ...F 3-3 PCB for PCB terminal block connection (MKDSO), view: Component side

Electronic housing - ME MAX 22,5 F G 3-3 KMGY - 2869388

Dimensional drawing

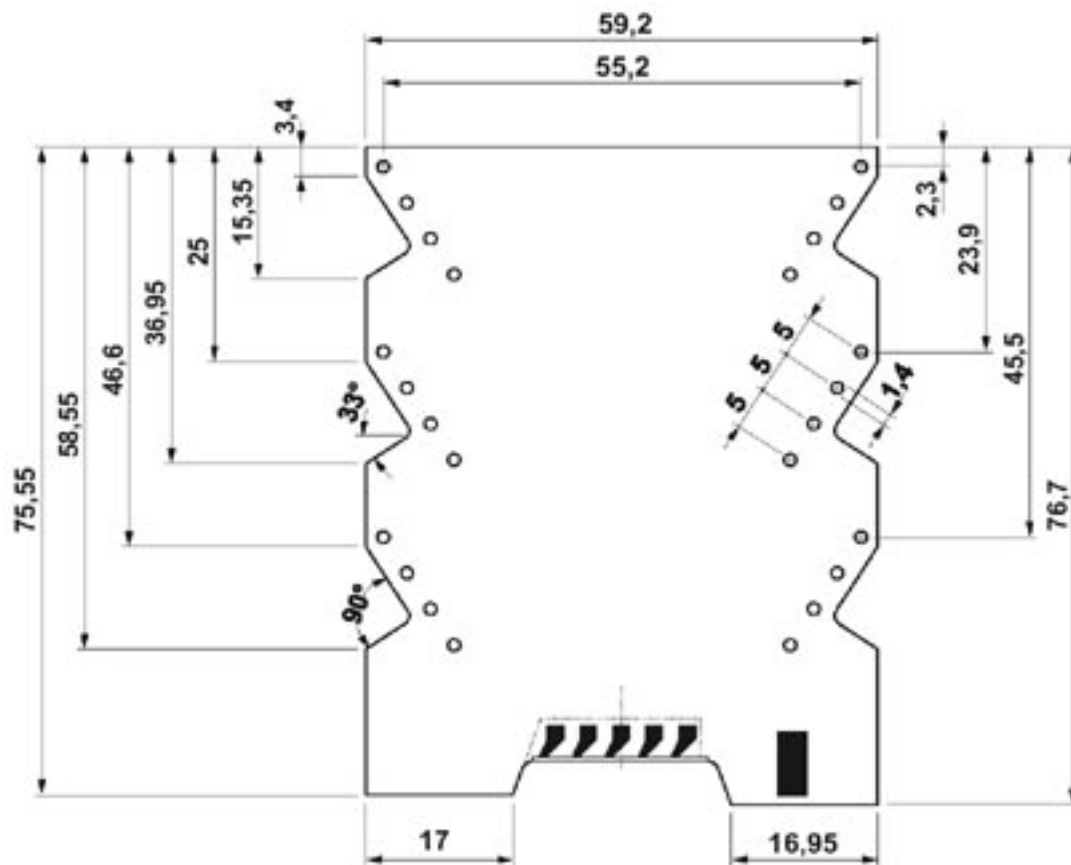

Dimensional drawing of the ME MAX ...SF 3-3 PCB for plug connection system (MSTBO), view: Component side

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Complete housing without vents, Cross connection: DIN rail bus connector, Color: light gray, Width: 22.5 mm, Constructional height: 92 mm, Number of positions cross connector: 5	2869388	ME MAX 22,5 F G 3-3 KMGY	Buy on EAN