



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

## Interface module - VIP-2/PT/PDM-2/16/FU 6.3A - 2903603

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 97.7 mm



### Why buy this product

- Consecutive numbering
- Two potential levels
- Separate supply



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 948166

### Technical data

#### Dimensions

Width	97.7 mm
Height	109.8 mm
Depth	51 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	250 V AC/DC
Max. current carrying capacity per branch	6.3 A (fuse limited)
Total current	30 A (per potential)
Potential connections	Per potential (P1, P2) 2 power/8 distributor terminal blocks
Mounting position	any
Standards/regulations	IEC 60664

# Interface module - VIP-2/PT/PDM-2/16/FU 6.3A - 2903603

## Technical data

### General

	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	III

### Connection data, supply

Connection method	Push-in-/Spring-cage connection
Stripping length	15 mm
Conductor cross section solid	0.2 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section AWG	24 ... 8
Number of connections	2

### Connection data, distribution

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14
Number of connections	16

### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	III

## Classifications

### eCl@ss

eCl@ss 4.1	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 8.0	27141152

### ETIM

ETIM 4.0	EC001423
ETIM 5.0	EC002780

# Interface module - VIP-2/PT/PDM-2/16/FU 6.3A - 2903603

## Approvals

### Approvals

Approvals

CSA / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

### Approval details

CSA	
mm <sup>2</sup> /AWG/kcmil	24-8
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	250 V

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	24-8
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	250 V


cUL Recognized	
mm <sup>2</sup> /AWG/kcmil	24-8
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	250 V

cULus Recognized	
------------------	--

## Drawings

## Interface module - VIP-2/PT/PDM-2/16/FU 6.3A - 2903603

Circuit diagram

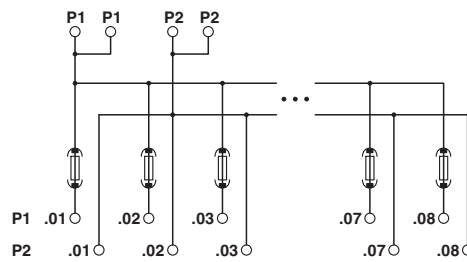

P1 circuits fused...P2 circuits unfused

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 97.7 mm	2903603	VIP-2/PT/ PDM-2/16/FU 6.3A	<a href="#">Buy on EAN</a>