



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Passive module - VIP-2/PT/FLK50/MODI-TSX/Q - 2904285

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE interface module, with push-in connection for MODICON® TSX Quantum, with MODICON®-specific labeling, for I/O of 32 channels



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 813723

Technical data

Dimensions

Width	107.9 mm
Height	72.1 mm
Depth	56 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	60 V AC/DC
Max. perm. current (per branch)	1 A
Number of positions	50
Status display	No
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	0.6 kV
Degree of pollution	2

Passive module - VIP-2/PT/FLK50/MODI-TSX/Q - 2904285

Technical data

General

Overvoltage category	II
----------------------	----

Connection data for connection 1

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	1
Number of positions	50

Supported controller

Controller	Schneider Electric MODICON TSX QUANTUM
- suitable I/O card	DDI 353
	DDI 841
	DDI 853
	DAI 340
	DAI 353
	DAI 440
	DAI 453
	DDO 353
	DDM 390
	ACI 030
	ACI 040
	ATI 030
	ARI 030
	AVI 030
	ACO 020
	ACO 130
	AVO 020
	EHC 105
	EHC 202

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

Passive module - VIP-2/PT/FLK50/MODI-TSX/Q - 2904285

Technical data

Standards and Regulations

Degree of pollution	2
Overvoltage category	II

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001423
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Passive module - VIP-2/PT/FLK50/MODI-TSX/Q - 2904285

Approvals

CSA	
mm ² /AWG/kcmil	26-14
Nominal current I _N	1 A
Nominal voltage U _N	125 V

UL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current I _N	1 A
Nominal voltage U _N	125 V

cUL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current I _N	1 A
Nominal voltage U _N	125 V


EAC

EAC

cULus Recognized

Drawings

Circuit diagram

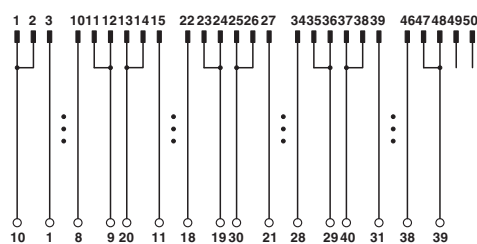

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
VARIOFACE interface module, with push-in connection for MODICON® TSX Quantum, with MODICON®-specific labeling, for I/O of 32 channels	2904285	VIP-2/PT/FLK50/ MODI-TSX/Q	Buy on EAN