



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Data interface - EM-PNET-GATEWAY-IFS - 2904472

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Gateway for the connection of up to 32 INTERFACE system devices via PROFINET to a higher-level controller. The INTERFACE system devices are connected to the Gateway via DIN rail connectors, the DIN rail connectors are provided.

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 826471

### Technical data

#### Device supply

Rated control circuit supply voltage $U_s$	24 V DC -20 % ... +25 %
Rated control supply current $I_s$	85 mA (plus load current of the outputs)
Protective circuit	Protection against polarity reversal
	Surge protection

#### Digital inputs

Number	8
Rated actuating voltage $U_c$	24 V DC $\pm 20$ %
Rated actuating current $I_c$	3 mA
Protective circuit	Protection against polarity reversal

#### Digital outputs

Designation	Switching outputs
Number	4
Note on protection circuit	Fusing with max. 8 A F-fuse
Residual voltage	1 V
Maximum switching voltage	23 V DC ( $U_B - U_{resid.}$ of the output)
Max. switching current	500 mA (per output)
Protective circuit	Parallel protection against polarity reversal, pay attention to the fuse

#### Connection data supply

Connection name	COMBICON connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2 mm <sup>2</sup>

## Data interface - EM-PNET-GATEWAY-IFS - 2904472

### Technical data

#### Connection data supply

Conductor cross section AWG min.	12
Conductor cross section AWG max.	24
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Screw thread	M3
Connection method	Screw connection
Stripping length	8 mm

#### Connection data programming connection

Connection name	Programming connection
Number of connections	1
Connection method	S-PORT (socket)
Number of positions	12

#### Connection data INTERFACE system

Connection name	INTERFACE system
Number of connections	1
Connection method	DIN rail bus connectors
Number of positions	5

#### Connection data BUS connection

Connection name	PROFINET
Number of connections	2
Connection method	RJ45

#### General

Operating mode	100% operating factor
Degree of protection	IP20
Standards/regulations	EN 61131-2
Degree of pollution	2
Overvoltage category	III
Mounting position	any
Assembly instructions	In rows with zero spacing
Mounting type	DIN rail mounting
Housing material	Polyamide PA non-reinforced
Color	green

#### Serial interface

Interface 1	IFS interface
Serial transmission speed	76.8 kbps
Connection method	DIN rail bus connectors
Interface 2	PROFINET
Serial transmission speed	10/100 Mbps

# Data interface - EM-PNET-GATEWAY-IFS - 2904472

## Technical data

### Serial interface

Connection method	RJ45 socket
-------------------	-------------

### Ambient conditions

Ambient temperature (operation)	-35 °C ... 50 °C
Ambient temperature (storage/transport)	-35 °C ... 80 °C

### Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

### Standards and Regulations

Standards/regulations	EN 61131-2
Degree of pollution	2
Overvoltage category	III

## Classifications

### eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371601
eCl@ss 5.1	27371601
eCl@ss 6.0	27371601
eCl@ss 7.0	27371601
eCl@ss 8.0	27242608

### ETIM

ETIM 3.0	EC000066
ETIM 4.0	EC002498
ETIM 5.0	EC001604

### UNSPSC

UNSPSC 6.01	30211915
UNSPSC 7.0901	39121514
UNSPSC 11	39121514
UNSPSC 12.01	39121514
UNSPSC 13.2	39121514

## Approvals

### Approvals

## Data interface - EM-PNET-GATEWAY-IFS - 2904472

### Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approvals submitted

### Approval details


UL Listed 

cUL Listed 

cULus Listed 

### Drawings

Block diagram

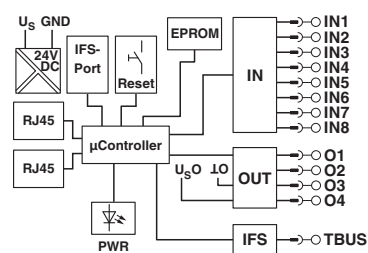

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Gateway for the connection of up to 32 INTERFACE system devices via PROFINET to a higher-level controller. The INTERFACE system devices are connected to the Gateway via DIN rail connectors, the DIN rail connectors are provided.	2904472	EM-PNET-GATEWAY-IFS	<a href="#">Buy on EAN</a>