



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Front adapters - VIP-PA-PWR/4X10COMBI/ 8,0M/S7 - 2904711

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, cable length: 8 m

Key Commercial Data

| | |
|--------------|---------------------|
| Packing unit | 1 STK |
| GTIN | 4 046356 882538 |

Technical data

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -20 °C ... 80 °C |

General

| | |
|--------------------------------|--|
| Nominal voltage U_N | ≤ 250 V AC/DC |
| Max. permissible current | 6 A (per single wire at 40°C) 4 A (per single wire at 60°C) |
| Max. permissible total current | 20 A (per cable at 40 °C) 16 A (per cable at 60°C) |
| Mounting position | any |
| Nominal operating mode | 100% operating factor |
| Degree of protection | IP20 |
| Standards/regulations | DIN EN 50178 IEC 60664 IEC 62103 |
| Rated surge voltage | basic insulation |
| Degree of pollution | 2 |
| Overvoltage category | III |

Connection data 1

| | |
|-------------------|--|
| Connection name | Controller level |
| Connection method | Can be plugged onto 40-pin I/O Modules |

Connection data 2

Front adapters - VIP-PA-PWR/4X10COMBI/ 8,0M/S7 - 2904711

Technical data

Connection data 2

| | |
|-----------------------|---------------------|
| Connection name | Field level |
| Connection method | COMBICON connectors |
| Number of connections | 4 |
| Number of positions | 10 |

Cable

| | |
|-----------------------------|---------------------|
| Individual wires per module | 16 |
| Single wire, material | Cu uninsulated |
| Single wire, cross section | 0.5 mm ² |
| External diameter | 9 mm |
| Length of cable | 8 m |
| Max. conductor resistance | ≤ 39 Ω/km |

Supported controller

| | |
|---------------------|---------------------------|
| Controller | SIEMENS S7-300 / ET 200 M |
| - suitable I/O card | 6ES7 321-1BL00-0AA0 |
| | 6ES7 321-1EL00-0AA0 |
| | 6ES7 321-1CH00-0AA0 |
| | 6ES7 321-1FF10-0AA0 |
| | 6ES7 322-1BL00-0AA0 |
| | 6ES7 322-8BH10-0AB0 |
| | 6ES7 322-5GH00-0AB0 |
| | 6ES7 322-5FF00-0AB0 |
| | 6ES7 322-5HF00-0AB0 |
| | 6ES7 322-1HF10-0AA0 |
| | 6ES7 323-1BL00-0AA0 |
| | 6ES7 331-7NF00-0AB0 |
| | 6ES7 331-7NF10-0AB0 |
| | 6ES7 331-1KF02-0AB0 |
| | 6ES7 331-7PF01-0AB0 |
| | 6ES7 331-7PF11-0AB0 |
| | 6ES7 331-7PE10-0AB0 |
| | 6ES7 332-5HF00-0AB0 |
| | 6ES7 326-1BK02-0AB0 |
| | 6ES7 326-1RF00-0AB0 |
| | 6ES7 326-2BF41-0AB0 |
| | 6ES7 326-2BF01-0AB0 |
| | 6ES7 326-2BF10-0AB0 |
| | 6ES7 336-1HE00-0AB0 |

Standards and Regulations

| | |
|----------------------------------|-----|
| Connection in acc. with standard | CUL |
|----------------------------------|-----|

Front adapters - VIP-PA-PWR/4X10COMBI/ 8,0M/S7 - 2904711

Technical data

Standards and Regulations

| | |
|--------------------------|--------------|
| Standards/regulations | DIN EN 50178 |
| | IEC 60664 |
| | IEC 62103 |
| Rated insulation voltage | 260 V AC/DC |
| Degree of pollution | 2 |
| Overvoltage category | III |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27249205 |

ETIM

| | |
|----------|----------|
| ETIM 4.0 | EC000237 |
| ETIM 5.0 | EC000237 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121620 |
| UNSPSC 7.0901 | 26121620 |
| UNSPSC 11 | 26121620 |
| UNSPSC 12.01 | 26121620 |
| UNSPSC 13.2 | 26121620 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / CSA / cULus Recognized


Ex Approvals


Approvals submitted

Front adapters - VIP-PA-PWR/4X10COMBI/ 8,0M/S7 - 2904711


Approvals

Approval details

UL Recognized 

cUL Recognized 

CSA 

cULus Recognized  us


Drawings

Front adapters - VIP-PA-PWR/4X10COMBI/ 8,0M/S7 - 2904711

Connection diagram


| Pin S7-300 | Wire color | PIN COMBI | |
|------------|------------|-----------|--------|
| 1 | white | 1 | Plug 1 |
| 2 | brown | 2 | |
| 3 | green | 3 | |
| 4 | yellow | 4 | |
| 5 | gray | 5 | |
| 6 | pink | 6 | |
| 7 | blue | 7 | |
| 8 | red | 8 | |
| 9 | black | 9 | |
| 10 | violet | 10 | |
| 11 | white | 11 | Plug 2 |
| 12 | brown | 12 | |
| 13 | green | 13 | |
| 14 | yellow | 14 | |
| 15 | gray | 15 | |
| 16 | pink | 16 | |
| 17 | blue | 17 | |
| 18 | red | 18 | |
| 19 | black | 19 | |
| 20 | violet | 20 | |
| 21 | white | 21 | Plug 3 |
| 22 | brown | 22 | |
| 23 | green | 23 | |
| 24 | yellow | 24 | |
| 25 | gray | 25 | |
| 26 | pink | 26 | |
| 27 | blue | 27 | |
| 28 | red | 28 | |
| 29 | black | 29 | |
| 30 | violet | 30 | |
| 31 | white | 31 | Plug 4 |
| 32 | brown | 32 | |
| 33 | green | 33 | |
| 34 | yellow | 34 | |
| 35 | gray | 35 | |
| 36 | pink | 36 | |
| 37 | blue | 37 | |
| 38 | red | 38 | |
| 39 | black | 39 | |
| 40 | violet | 40 | |

Dimensional drawing

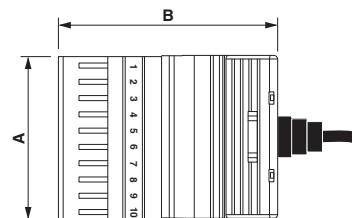

| | A | B |
|-----------------|----|----|
| ...4X10COMBI... | 52 | 70 |
| ...2X10COMBI... | | |
| ...4X10 PT... | 35 | 62 |
| ...2X10 PT... | | |

Circuit diagram

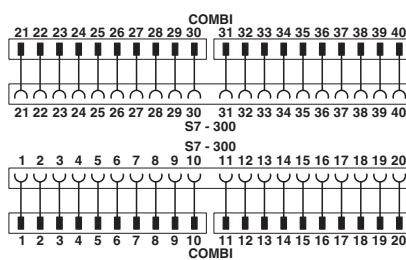



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

| Product | Code | Reference | Product link |
|--|---------|------------------------------|----------------------------|
| VIP power cabling, universal front adapter for connecting all common 40-pos. SIMATIC S7-300 I/O modules, via four cables each with a 10-pos. COMBI connector, pitch: 5.2 mm, cable length: 8 m | 2904711 | VIP-PA-PWR/4X10COMBI/8,0M/S7 | Buy on EAN |