



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Separating plate - PT-IQ-EX-H-PP - 2905024

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Partition plate for NS-35/7,5 isolated DIN rails (DIN rail is isolated using the AB/NS support bracket) to ensure a clearance of 50 mm between the controller and surge protection for PT-IQ-EX systems.

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 913065

Technical data

Dimensions

Height	138.7 mm
Width	1 mm
Depth	83.47 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

General

Housing material	FR 4-21
Flammability rating according to UL 94	V-0
Color	blue

Classifications

eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 8.0	27141133


ETIM

ETIM 4.0	EC000886
ETIM 5.0	EC000886

Separating plate - PT-IQ-EX-H-PP - 2905024

Drawings

Dimensional drawing

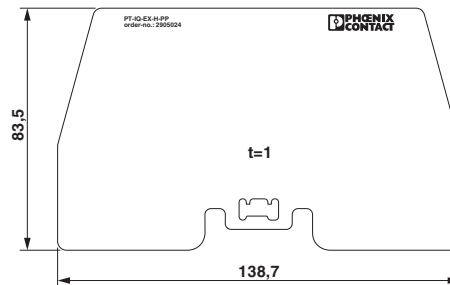

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Partition plate for NS-35/7,5 isolated DIN rails (DIN rail is isolated using the AB/NS support bracket) to ensure a clearance of 50 mm between the controller and surge protection for PT-IQ-EX systems.	2905024	PT-IQ-EX-H-PP	Buy on EAN