



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

System connection - RIF-1-V8/PT/FLK14/OUT - 2905195

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



V8-OUTPUT adapter for eight RIFLINE complete RIF-1 relay bases. 14-pos. flat-ribbon cable connection for the PLC system cabling, control logic: positive switching

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 946650

Technical data

Dimensions

Width	128 mm
Height	101 mm
Depth	75 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

General

Max. perm. operating voltage	30 V DC
Max. perm. current (per branch)	1 A (per signal path)
Max. permissible current (separate power supply)	3 A
Number of positions	14
Status display	Yellow LED/per channel
Mounting position	any
Assembly instructions	Can be plugged into 8 x RIFLINE complete RIF-1 relay bases
Degree of protection	IP20
Designation	Air clearances and creepage distances
Standards/regulations	IEC 60664
	IEC 62103
	DIN EN 50178
Rated insulation voltage	63 V DC
Rated surge voltage	0.6 kV (Functional insulation)

System connection - RIF-1-V8/PT/FLK14/OUT - 2905195

Technical data

General

Degree of pollution	2
Overvoltage category	II
UL, USA	UL 508 Recognized
CSA	CSA-C22.2 No. 14-13

Connection data for connection 1

Connection name	Supply
Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section solid	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Number of connections	4

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip (2.54 mm)
Number of connections	1
Number of positions	14

Supported controller

Controller	SIEMENS S7-400
- suitable I/O card	6ES7 422-1BL00-0AA0
	6ES7 422-1BL00-0AA0
Controller	GE-FANUC 90-30
- suitable I/O card	IC693 MDL732
	IC693 MDL740
	IC693 MDL742
Controller	ALLEN-BRADLEY ControlLogix
- suitable I/O card	1756-OB32
	1756-OB16E
Controller	ALLEN-BRADLEY PLC 5
- suitable I/O card	1771 OBN
Controller	ALLEN-BRADLEY SLC 500
- suitable I/O card	1746 OB16
	1746 OB 32
Controller	HONEYWELL Experion PKS C200
- suitable I/O card	TC-ODD 321
Controller	MITSUBISHI MELSEC Q
- suitable I/O card	QY81P
	QY82P
Controller	SIEMENS S7-300 / ET 200 M

System connection - RIF-1-V8/PT/FLK14/OUT - 2905195

Technical data

Supported controller

- suitable I/O card	CPU 313C-2DP
	CPU 314C-2DP
	CPU 314C-2PtP
	6ES7 322-1BH01-0AA0
	6ES7 322-1BL00-0AA0
	6ES7 323-1BH01-0AA0
	6ES7 323-1BL00-0AA0
	CPU 313C
	CPU 313C-2PtP
Controller	ABB S800 I/O
- suitable I/O card	DO810
	DO840
Controller	Emerson DeltaV
- suitable I/O card	VE4002S1T1B3
	VE4002S1T2B3
	VE4002S1T2B3 Series 2
	VE4002S1T2B6
Controller	GE-FANUC RX3i
- suitable I/O card	IC694MDL754
Controller	MITSUBISHI MELSEC L
- suitable I/O card	LY41PT1P
	LY42PT1P

Standards and Regulations

Designation	Air clearances and creepage distances
Standards/regulations	IEC 60664
	IEC 62103
	DIN EN 50178
Degree of pollution	2
Overvoltage category	II
UL, USA	UL 508 Recognized
CSA	CSA-C22.2 No. 14-13
	CSA-C22.2 No. 158-10

Classifications

eCl@ss

eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 8.0	27141152

System connection - RIF-1-V8/PT/FLK14/OUT - 2905195

Classifications

ETIM

ETIM 5.0	EC002780
----------	----------

Approvals

Approvals


Approvals


UL Recognized / cUL Recognized / CSA / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 


CSA 

cULus Recognized 

Drawings

System connection - RIF-1-V8/PT/FLK14/OUT - 2905195

Circuit diagram

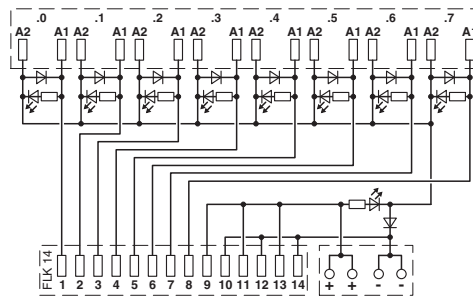

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
V8-OUTPUT adapter for eight RIFLINE complete RIF-1 relay bases. 14-pos. flat-ribbon cable connection for the PLC system cabling, control logic: positive switching	2905195	RIF-1-V8/PT/ FLK14/OUT	Buy on EAN