



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Electronic housing - UM 72-PROFIL 100CM - 2907583

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Panel mounting base Open, Lower part, Cross connection: without bus connector, Color: green, Width: 1000 mm, Number of positions cross connector: not relevant, Note: required profile length = PCB length - 3.6 mm



The illustration shows the variant UM 45-Profil CM

## Why buy this product

- Lateral elements with potential ground contact available from the PCB to the DIN rail (EMC)
- Fast assembly on standard NS 35 or NS 32 DIN rails
- Inexpensive as a result of reducing the number of separate housing parts
- Wide range of options for external conductor connection
- Flexible size and shape
- High degree of mechanical stability by screwing the lateral elements to the profile
- The modules can be marked with Phoenix Contact marking material using the marking grooves in the press-drawn section

## Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 365394

## Technical data

### General

Housing type	Panel mounting base
Housing material	PVC
Color	green

### Ambient conditions

Ambient temperature (operation)	-15 °C ... 50 °C
---------------------------------	------------------

### Dimensions

Length	1 m
Width	1000 mm

### Technical data

Flammability rating according to UL 94	V0
--	----

## Standards and Regulations

# Electronic housing - UM 72-PROFIL 100CM - 2907583

## Technical data

### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

## Classifications

### eCl@ss

eCl@ss 4.0	27180401
eCl@ss 4.1	27180401
eCl@ss 5.0	27180506
eCl@ss 5.1	27180506
eCl@ss 6.0	27180802
eCl@ss 7.0	27182701
eCl@ss 8.0	27182701

### ETIM


ETIM 2.0	EC001031
ETIM 3.0	EC001031
ETIM 4.0	EC001031
ETIM 5.0	EC002779

### UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Drawings

Dimensional drawing

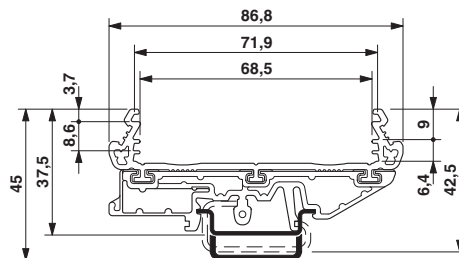

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



**Automatización Eléctrica**  
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Panel mounting base Open, Lower part, Cross connection: without bus connector, Color: green, Width: 1000 mm, Number of positions cross connector: not relevant, Note: required profile length = PCB length - 3.6 mm	2907583	UM 72-PROFIL 100CM	<a href="#">Buy on EAN</a>