



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Surge protection plug - PT 2X1-VF-230AC-ST - 2921365

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective connector with protective circuit free of leakage current for two floating signals. Connection in series, consisting of varistor and gas-filled surge arrester between signal wires and ground.


Illustration shows variant PT 2X1-VF-120AC-ST

Why buy this product

- Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Protective devices for use in telecommunications and signaling networks according to IEC 61643-21
- Impedance-neutral disconnection of plug for test and maintenance purposes



Key Commercial Data

Packing unit	10 STK
GTIN	 4 046356 286572

Technical data

Dimensions

Height	45 mm
Width	17.7 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module height	90 mm
Complete module width	17.7 mm
Complete module depth	65.5 mm

Ambient conditions

Surge protection plug - PT 2X1-VF-230AC-ST - 2921365

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

General

Housing material	PA 6.6
Flammability rating according to UL 94	V0
Color	black
Mounting type	On base element
Type	DIN rail module, two-section, divisible
Number of positions	2
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage U_N	230 V AC
Maximum continuous voltage U_C	250 V AC
Nominal current I_N	6 A
Operating effective current I_C at U_C	$\leq 2 \mu\text{A}$
Residual current I_{PE}	$\leq 2 \mu\text{A}$ (at U_N)
Nominal discharge current I_n (8/20) μs	3 kA
Max. discharge current I_{max} (8/20) μs	8 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Earth)	100 A
Impulse discharge current (10/350) μs , peak value I_{imp}	500 A
Output voltage limitation at 1 kV/ μs (Core-Earth) static	$\leq 1.4 \text{ kV}$
Residual voltage at I_n (conductor-conductor)	$\leq 2 \text{ kV}$
Residual voltage at I_n (conductor-ground)	$\leq 1 \text{ kV}$
Residual voltage with I_{an} (10/1000) μs (conductor-conductor)	$\leq 1.4 \text{ kV}$
Residual voltage with I_{an} (10/1000) μs (conductor-ground)	$\leq 700 \text{ V}$
Energy absorption	150 J
Voltage protection level U_p (core-core)	$\leq 2.5 \text{ kV}$ (C2 - 4 kV/2 kA)
	$\leq 1.8 \text{ kV}$ (C3 - 100 A)
	$\leq 2.6 \text{ kV}$ (D1 - 500 A)
Voltage protection level U_p (core-ground)	$\leq 1.1 \text{ kV}$ (C1 - 500 A)
	$\leq 1.5 \text{ kV}$ (C2 - 4 kV/2 kA)
	$\leq 1.6 \text{ kV}$ (C3 - 100 A)
	$\leq 1.8 \text{ kV}$ (D1 - 500 A)
Response time t_A	$\leq 100 \text{ ns}$
Capacity (Core-Core)	typ. 1.5 pF

Surge protection plug - PT 2X1-VF-230AC-ST - 2921365

Technical data

Protective circuit

Capacity (Core-Earth)	typ. 3 pF
Resistance in series	0 Ω
Max. required back-up fuse	6 A (gL / gG)
Impulse durability (conductor-ground)	C2 - 4 kV/2 kA
	C3 - 100 A
	D1 (500 A)

Connection data

Connection method	Screw connection (in connection with the base element)
Connection type IN	PLUGTRAB plug-in system
Connection type OUT	PLUGTRAB plug-in system

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807
eCl@ss 9.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Surge protection plug - PT 2X1-VF-230AC-ST - 2921365

Approvals

Approvals

EAC


Ex Approvals

Approvals submitted

Approval details

EAC

Drawings

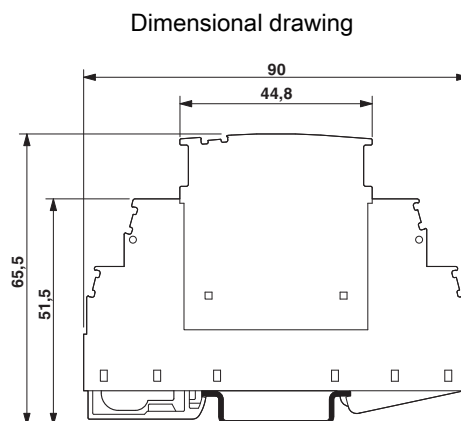

The figure shows the complete module consisting of a base element and connector

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Protective connector with protective circuit free of leakage current for two floating signals. Connection in series, consisting of varistor and gas-filled surge arrester between signal wires and ground.	2921365	PT 2X1-VF-230AC-ST	Buy on EAN