



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Setpoint value potentiometer, to set setpoints individually, resistance value 4,7 kΩ


The illustration shows version EMG 30-SP- 1K LIN

Why buy this product

- For direct setpoint definition in combination with a constant voltage source



Key Commercial Data

Packing unit	10 STK
GTIN	 4 017918 079956

Technical data

Dimensions

Width	30 mm
Height	75 mm
Depth	68 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 40 °C
---------------------------------	----------------

Input data

Potentiometer	4.7 kΩ
Resistance tolerance	±20 %
Potentiometer, current-carrying capacity	1 W

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²

Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Technical data

Connection data

Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Stripping length	8 mm
Screw thread	M3
Connection method	Screw connection

General

Mounting position	any
Housing material	Polycarbonate fiber reinforced PC-F
Color	green

Classifications

eCl@ss

eCl@ss 4.0	27200303
eCl@ss 4.1	27200303
eCl@ss 5.0	27200303
eCl@ss 5.1	27200303
eCl@ss 6.0	27200303
eCl@ss 7.0	27142316
eCl@ss 8.0	27371227

ETIM

ETIM 2.0	EC001440
ETIM 3.0	EC001440
ETIM 4.0	EC001440
ETIM 5.0	EC001027

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

Approvals

Approvals

Approvals

EAC

Setpoint adjuster - EMG 30-SP- 4K7LIN - 2940252

Approvals

Ex Approvals


Approvals submitted

Approval details


EAC

Drawings

Dimensional drawing

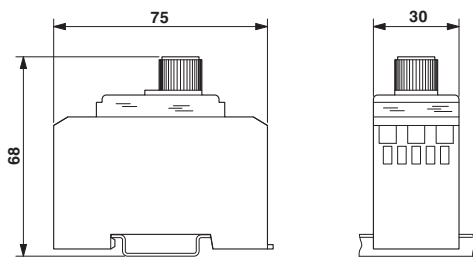

Circuit diagram

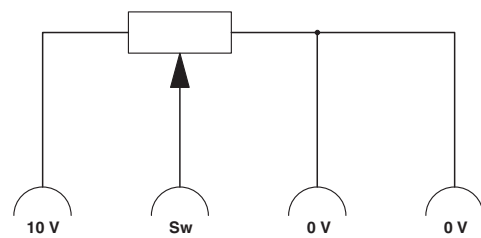

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Setpoint value potentiometer, to set setpoints individually, resistance value 4,7 kΩ	2940252	EMG 30-SP-4K7LIN	Buy on EAN