At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. HERE

Test terminal strip - PTWE 6-2/A14 - 3069439

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Test terminal strip, VDE coded type A14, Connection method: Push-in connection, Number of positions: 14, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 147.6 mm, Height: 56.5 mm, Color: gray, Mounting type: Wall mounting

Why buy this product

- Cost-effective, thanks to the tailored, modular design and use of standardized CLIPLINE complete accessories
- Space saving, thanks to compact, modular test terminal strips
- The integrated, robust switch contact is designed for the most stringent demands, and the use of high-quality materials ensures the transmission of signal currents, even after multiple actuations
- Maximum safety with leading and automatic transformer short circuit

Key Commercial Data

Packing unit	1 STK
GTIN	4 046356 943512

Technical data

General

Note	A detailed circuit diagram can be found under Miscellaneous Downloads
Number of levels	1
Number of connections	28
Nominal cross section	6 mm²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Rated surge voltage	4 kV
Overvoltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Maximum load current	30 A (with 6 mm² conductor cross section)
Current I_{th}	24 A
Nominal voltage U_N	400 V AC/DC
Open side panel	No
Number of positions	14

Test terminal strip - PTWE 6-2/A14 - 3069439

Technical data

General

Insertion/withdrawal cycles mechanical	100
Shock protection test specification	DIN EN 50274 (VDE 0660-514):2002-11
Back of the hand protection	guaranteed
Finger protection	guaranteed
Result of surge voltage test	Test passed
Surge voltage test setpoint	4.8 kV
Result of power-frequency withstand voltage test	Test passed
Power frequency withstand voltage setpoint	1.89 kV
Result of the test for mechanical stability of terminal points (5 x conductor connection)	Test passed
Result of bending test	Test passed
Bending test rotation speed	10 rpm
Bending test turns	135
Bending test conductor cross section/weight	0.5 mm² / 0.3 kg
	6 mm^2 / 1.4 kg
	10 mm² / 2 kg
Tensile test result	Test passed
Conductor cross section tensile test	0.5 mm²
Tractive force setpoint	30 N
Conductor cross section tensile test	6 mm²
Tractive force setpoint	80 N
Conductor cross section tensile test	10 mm²
Tractive force setpoint	90 N
Result of tight fit on support	Test passed
Setpoint	5 N
Result of voltage-drop test	Test passed
Requirements, voltage drop	≤ 4.8 mV
Result of temperature-rise test	Test passed
Short circuit stability result	Test passed
Conductor cross section short circuit testing	4 mm²
Short-time current	0.5 kA
Conductor cross section short circuit testing	4 mm²
Short-time current	0.3 kA
Conductor cross section short circuit testing	4 mm²
Short-time current	0.15 kA
Result of aging test	Test passed
Ageing test for screwless modular terminal block temperature cycles	192
Result of thermal test	Test passed
Proof of thermal characteristics (needle flame) effective duration	30 s
Oscillation, broadband noise test result	Test passed
Test specification, oscillation, broadband noise	DIN EN 50155 (VDE 0115-200):2008-03

Test terminal strip - PTWE 6-2/A14 - 3069439

Technical data

General

Test spectrum	Service life test category 2, bogie mounted
Test frequency	f_1 = 5 Hz to f_2 = 250 Hz
ASD level	6.12 $(m/s^2)^2/Hz$
Acceleration	3.12 g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Shock test result	Test passed
Test specification, shock test	DIN EN 50155 (VDE 0115-200):2008-03
Shock form	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Dimensions

Width	147.6 mm
Length	100 mm
Height	56.5 mm
Plate thickness	1 mm ... 4 mm

Connection data

Connection method	Push-in connection
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section solid min.	0.5 mm²
Conductor cross section solid max.	10 mm²
Conductor cross section AWG min.	20
Conductor cross section AWG max.	8
Conductor cross section flexible min.	0.5 mm²
Conductor cross section flexible max.	6 mm²
Min. AWG conductor cross section, flexible	10
Max. AWG conductor cross section, flexible	8
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.5 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max.	6 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max.	6 mm²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1.5 mm²
Stripping length	12 mm
Internal cylindrical gage	A5

Assembly

Test terminal strip - PTWE 6-2/A14 - 3069439

Technical data

Assembly

Mounting type	Wall mounting
Plate thickness	1 mm ... 4 mm
Min. tightening torque of the mounting screw:	0.8 Nm
Max. tightening torque of the mounting screw:	1 Nm

Standards and Regulations

Connection in acc. with standard	IEC 60947-7-1
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 5.1	27141120
eCl@ss 6.0	27141141
eCl@ss 8.0	27141126

ETIM

ETIM 4.0	EC000897
ETIM 5.0	EC000902

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized

	D
mm²/AWG/kcmil	20-8
Nominal current IN	10 A
Nominal voltage UN	300 V

Test terminal strip - PTWE 6-2/A14 - 3069439

Approvals

cUL Recognized

	D
mm²/AWG/kcmil	20-8
Nominal current IN	10 A
Nominal voltage UN	300 V

cULus Recognized

Drawings

Circuit diagram



Dimensional drawing

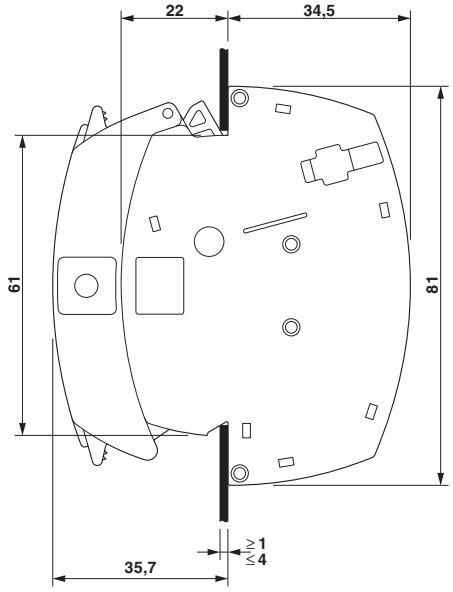

Dimensional drawing

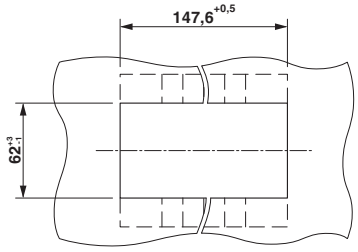

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Test terminal strip, VDE coded type A14, Connection method: Push-in connection, Number of positions: 14, Cross section: 0.5 mm² - 10 mm², AWG: 20 - 8, Width: 147.6 mm, Height: 56.5 mm, Color: gray, Mounting type: Wall mounting	3069439	PTWE 6-2/ A14	Buy on EAN