


# Photoelectrics Through-beam, Transistor Output Type PB10CNT20..

CARLO GAVAZZI



- Elevators, Escalators and Entrance control
- Range 20 m
- ESPE-Type 2, PL C.
- Modulated, infrared light
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP type
- Make or break switching
- LED for output indication or power supply
- Protection: reverse polarity, short circuit, transients
- Emitter mute and power adjustment
- CE, UL325 and UL508 approved

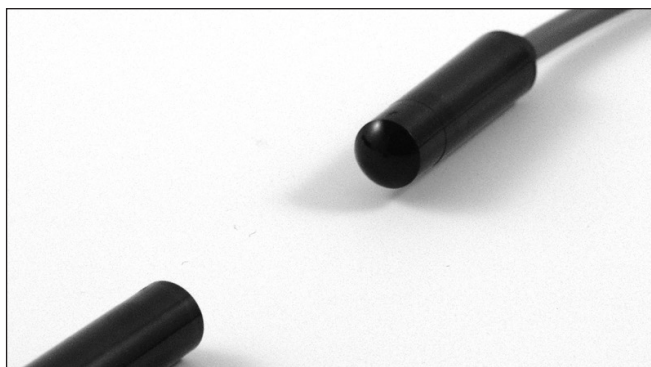

## Product Description

The PB10CNT. is a through beam sensor set specially designed for Elevators, Escalators, Entrance control to meet the requirements in the door market. The housing is very robust and is

known for its high long term reliability. The emitter has a mute input to turn it off for evaluation of the sensor function. Available in 10-30 VDC version.

## Ordering Key

**PB10CNT20NO**

|                      |       |
|----------------------|-------|
| Type                 | _____ |
| Housing style        | _____ |
| Housing size         | _____ |
| Housing material     | _____ |
| Sensor code          | _____ |
| Detection principle  | _____ |
| Sensing distance     | _____ |
| Output type          | _____ |
| Output configuration | _____ |

## Type Selection

| Housing diameter | Range S <sub>n</sub> | Con-nec-tor | Ordering no. Receiver NPN, NO | Ordering no. Receiver NPN, NC | Ordering no. Receiver PNP, NO | Ordering no. Receiver PNP, NC | Ordering no. Emitter |
|------------------|----------------------|-------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|----------------------|
| Ø 10 mm          | 20 m                 | NO          | PB10CNT20NO                   | PB10CNT20NC                   | PB10CNT20PO                   | PB10CNT20PC                   | PB10CNT20            |

Note: Please order emitter and receiver separately


## Specifications Emitter

|   |                              |                     |                                  |
|---|------------------------------|---------------------|----------------------------------|
| Rated operational volt. (U <sub>B</sub> ) | 10 to 30 VDC                 | Light type          | Infrared, modulated              |
| Ripple (U <sub>rrp</sub> )                | ≤ 10%                        | Light spot          | 1580 mm @ 12 m                   |
| Supply current                            | ≤ 20 mA                      | Emitter angle       | ± 3.8° @ 12 m                    |
| Protection                                | Reverse polarity, transients | Indication function | Power supply ON<br>Mute input ON |
| Power ON delay (t <sub>v</sub> )          | ≤ 100 ms                     | Power adjustment    | R <sub>x</sub> ~ 3 kΩ -10 kΩ     |
| Control input                             |                              |                     |                                  |
| Normal oper.                              | > 1.5 VDC                    |                     |                                  |
| Mute                                      | < 1.2 VDC                    |                     |                                  |
| Light source                              | LED, 860 nm                  |                     |                                  |

## Specifications Receiver

|  |   |                                       |                            |  |
|--|---|---------------------------------------|----------------------------|--|
| <b>Rated operating dist. (S<sub>n</sub>)</b>       | 20 m  | <b>Utility category</b>               | DC12                       | Control of resistive loads and solid state loads with optical insulation |
| <b>Blind zone</b>                                  | None  |                                       | DC13                       | Control of electromagnets  |
| <b>Temperature drift</b>                           | ≤ 0.4%/°C                                   | <b>Ambient light</b>                  |                            | > 80.000 Lux (EN60947-5-2)   |
| <b>Hysteresis (H)</b>                              | 3 - 20%                                     | <b>Detection angle</b>                |                            | ± 2.9° @ 12 m  |
| <b>Rated operational volt. (U<sub>B</sub>)</b>     | 10 to 30 VDC (ripple included)              | <b>Operating frequency (f)</b>        |                            | 100 Hz   |
| <b>Ripple (U<sub>rrp</sub>)</b>                    | ≤ 10%                                       | <b>Response time</b>                  | OFF-ON (t <sub>ON</sub> )  | ≈ 6.5 ms   |
| <b>No load supply current (I<sub>o</sub>)</b>      | ≤ 16 mA                                     |                                       | ON-OFF (t <sub>OFF</sub> ) | ≈ 3.5 ms   |
| <b>Output current</b>                              |   | <b>Power ON delay (t<sub>v</sub>)</b> |                            | ≤ 100 ms   |
| Continuous (I <sub>a</sub> )                       | ≤ 100 mA                                    | <b>Output function</b>                |                            | NPN or PNP   |
| Short-time (I)                                     | ≤ 100 mA,<br>(max. load capacity 100 nF)    |                                       |                            | Make or break (NO or NC)   |
| <b>Minimum operational current (I<sub>m</sub>)</b> | 0.5 mA                                      | <b>Indication function</b>            |                            | Output ON  |
| <b>OFF-state current (I<sub>r</sub>)</b>           | ≤ 100 μA                                    |                                       |                            | LED, yellow  |
| <b>Voltage drop (U<sub>d</sub>)</b>                | ≤ 1.6 VDC @ 100 mA                          |                                       |                            |  |
| <b>Protection</b>                                  | Short-circuit, reverse polarity, transients |                                       |                            |  |

## General Specifications

|  |   |   |   |  |
|--|---|---|---|--|
| <b>Environment</b>                                       |   | <b>Surge (EN 61000-4-5)</b>                           |   |  |
| Overvoltage category                                     | III (IEC 60664/60664A, 60947-1)   | Power-supply  | > 1 kV (with 500 Ω)   |  |
| Pollution degree   | 3 (IEC 60664/60664A, 60947-1)   | Sensor output   | > 1 kV (with 500 Ω)   |  |
| Degree of protection                                     | IP67 (IEC 60529; EN60947-1)<br>1, 2, 3, 4, 6, 12, 13 (NEMA types)   | <b>Wire conducted disturbances (EN 61000-4-6)</b>     |   | > 10 Vrms  |
| <b>Temperature</b>                                       |   | <b>Power-frequency magnetic fields (EN 61000-4-8)</b> |   |  |
| Operating  | -20° to +50°C (-4° to +122°F)   | Continuous  | > 30 A/m, 38 μ tesla  |  |
| Storage  | -25° to +80°C (-13° to +176°F)  | Short-time  | > 300 A/m, 380 μ tesla  |  |
| <b>Rated insulation voltage</b>                          | 75 VDC  | <b>Vibration (IEC 60068-2-6)</b>                      |   | 10 to 150 Hz, 1 mm / 15 g  |
| <b>Dielectric test voltage</b>                           | 500 Vac rms (EN60947-1)   | <b>Shock (IEC 60068-2-27)</b>                         |   | 30 G / 11 ms, 6 pos, 6 neg per axis  |
| <b>Rated impulse withstand test</b>                      | 800 V (1.2 / 50 μs) (EN60947-1)   | <b>Free fall (IEC 60068-2-31)</b>                     |   | 2 times from 1 m<br>100 times from 0.5 m                                       |
| <b>ESPE</b>  | Type 2  | <b>Housing material</b>                               |   |  |
| <b>PFH<sub>d</sub></b>                                   | 6 x 10 <sup>-8</sup> failure per hour (worst case SRP for CS)   | Body  |   | PC black   |
| <b>Diagnostic coverage</b>                               | 99 % (EN13849-1: 2008)  | <b>Connection</b>                                     |   |  |
| <b>Performance level</b>                                 | C (EN13849-1: 2008)   | Cable   |   | PVC, Emitter: grey / Receiver: black, 5 m, 3 x 0.14 mm <sup>2</sup> , Ø 2.9 mm |
| <b>MTTF<sub>d</sub> (worst case full sensor)</b>         | 345 Years (worst case full receiver)<br>EN ISO 13849-1, SN 29500<br>412 Years (worst case full emitter)<br>EN ISO 13849-1, SN 29500 | <b>Weight</b>   |   |  |
| <b>Electrostatic discharge (EN61000-4-2)</b>             |   | Emitter   |   | 80 g   |
| Contact discharge  | > 12 kV   | Receiver  |   | 80 g   |
| Air discharge  | > 8 kV  | <b>CE-marking</b>                                     |   | EN12445, EN12453, EN12978, EN 60947-5-2  |
| <b>Radiated RF electromagnetic fields (EN 61000-4-3)</b> |   | <b>UL-Approval</b>                                    |   |  |
| Electrical fast transients/burst (EN 61000-4-4)          | > 10 V/m<br>± 4 kV  |   |  | UL325<br>UL508, CSA-C22.2 No.247   |

## Operation Diagram

tv = Power ON delay

Power supply


Target emitter present

Object present


Break (NC) Output ON

Make (NO) Output ON


Mute active  $\leq 1.2$  VDC

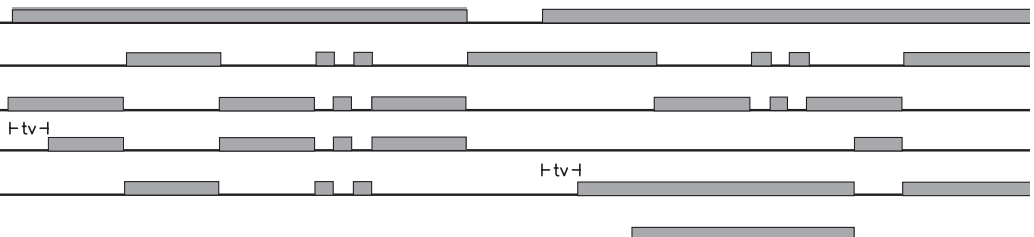


## Dimensions

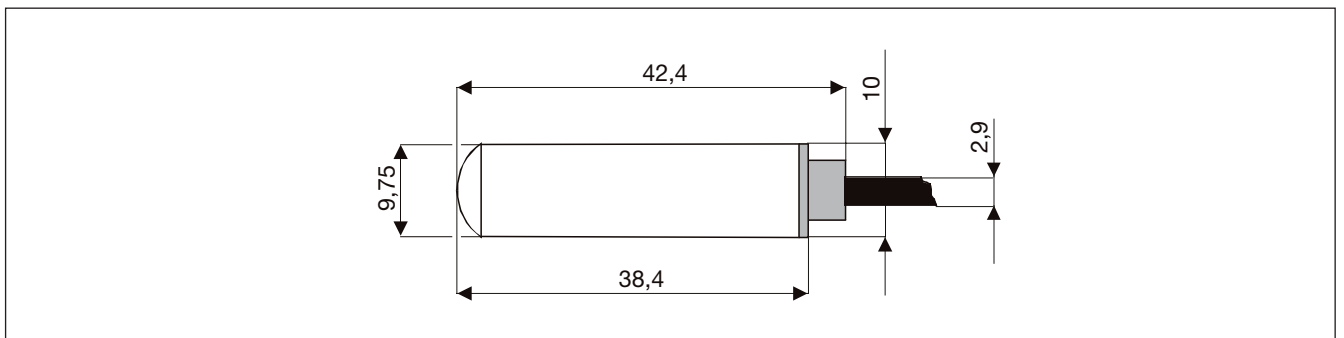


## Wiring Diagram

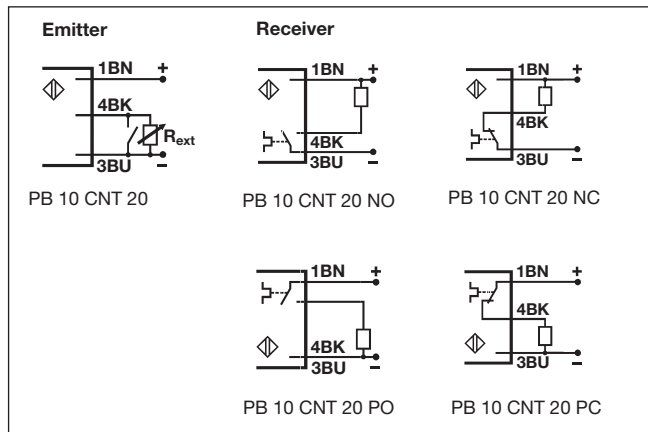


## Detection Diagram

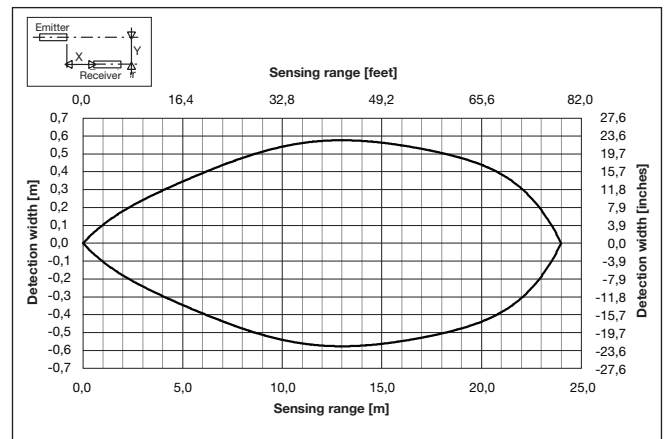





## Power adjustment curve

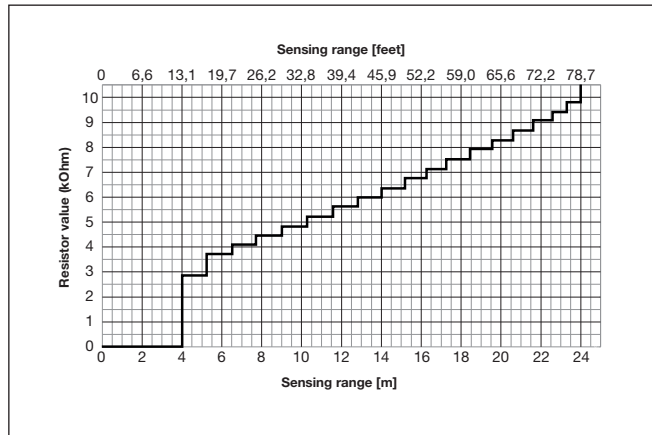

## Excess Gain

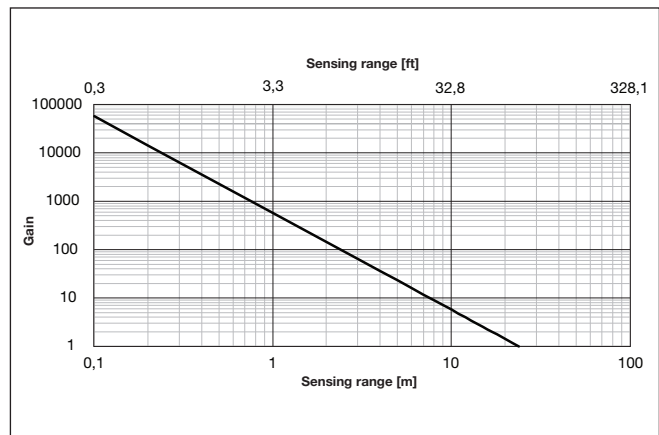

## Installation Hints
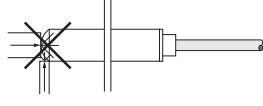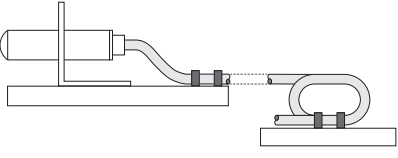
|   |   |   |  |
|---|---|---|--|
| <p><i>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</i></p>  | <p><i>Relief of cable strain</i></p>  <p>The cable should not be pulled</p> | <p><i>Protection of the sensing face</i></p>  <p>A proximity switch should not serve as mechanical stop</p> | <p><i>Switch mounted on mobile carrier</i></p>  <p>Any repetitive flexing of the cable should be avoided</p> |
|---|---|---|--|

## Delivery Contents

- PB10
- **Packaging:** plastic bag