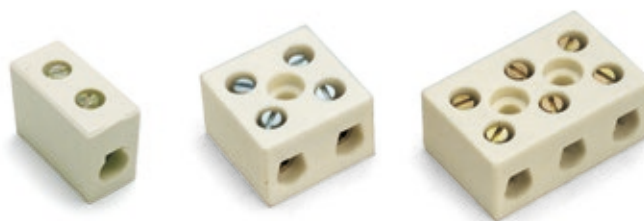
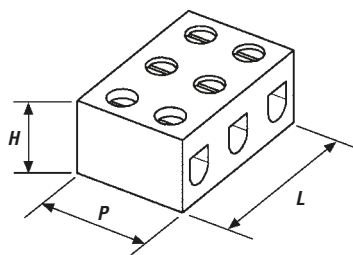


MORSETTIERE IN STEATITE TIPO ZS

Sezioni e dimensioni:


Tipo	Sezione nominale mm ²		N° poli	Dimensioni mm			
	Rigido	Flex		Øi	L	H	P
ZS-U6	4/6	4	1	3,0	9	18,0	19,0
ZS-B6	4/6	4	2	3,0	22	18,0	19,0
ZS-T6	4/6	4	3	3,0	36	18,0	19,0
ZS-U10	10	6	1	4,0	13	20,0	21,0
ZS-B10	10	6	2	4,0	24	20,0	21,0
ZS-T10	10	6	3	4,0	36	20,0	21,0
ZS-U16	16	10	1	6,0	15	22,0	27,0
ZS-B16	16	10	2	6,0	31	22,0	27,0
ZS-T16	16	10	3	6,0	48	22,0	27,0

Materiale:

- corpo isolante in STEATITE (silicato di Magnesio Mba3S)
- morsetto in OTTONE
- vite in ACCIAIO ZINCATO
- colore: avorio

Caratteristiche Tecniche:

- Tensione nominale: 450 V
- Temperatura d'esercizio: 300 °C
- Temperatura max corpo isolante: 1000 °C
- Temperatura max morsetti a bussola: 350 °C
- Rigidità dielettrica corpo isolante: 20 kV/mm

Cembre SpA

Via Serenissima, 9 - 25135 Brescia (Italia)
 Tel.: 030 36921 - Telefax: 030 3365766
 www.cembre.com - E-mail: info@cembre.com