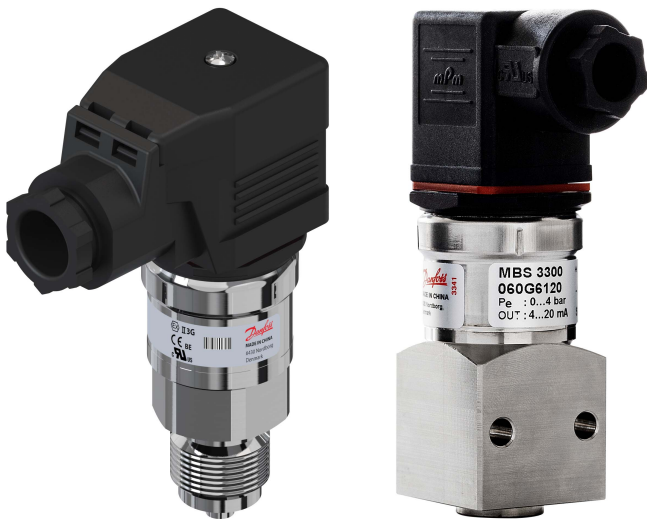


Data Sheet

Pressure transmitter Type **MBS 3300** and **MBS 3350**

For high temperature marine applications



The compact high temperature pressure transmitter is designed for use in almost all marine applications, and offers a reliable pressure measurement, even under harsh environmental conditions.

The flexible pressure transmitter programme covers different output signals, absolute or gauge (relative) versions, measuring ranges from 0 – 1 to 0 – 600 bar and a wide range of pressure and electrical connections.

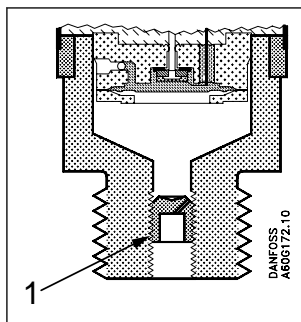
A robust design, an excellent vibration stability, and a high degree of EMC / EMI protection equip the pressure transmitter to meet the most stringent marine requirements.

Features

- Designed for use in severe maritime environments
- For medium and ambient temperatures up to 125 °C
- All standard output signals:
 - Ratiometric 10 - 90% of supply
 - 4 – 20 mA
 - 0 – 5 V, 1 – 5 V, 1 – 6 V, 0 – 10 V
- Enclosure and wetted parts of AISI 316L
- A wide range of pressure and electrical connections
- Fully digitally compensated
- For use in ATEX Zone 2 explosive atmospheres
- UL approved

Applications

Application and media conditions (MBS 3350)



1 Pulse-snubber

Application

Cavitation, liquid hammer and pressure peaks may occur in liquid filled hydraulic systems with changes in flow velocity, e.g. fast closing of a valve or pump starts and stops.

The problem may occur on the inlet and outlet side, even at rather low operating pressures.

Media condition

Clogging of the nozzle may occur in liquids containing particles. Mounting the transmitter in an upright position minimizes the risk of clogging, because the flow in the nozzle is limited to the startup period until the dead volume behind the nozzle orifice is filled.

The media viscosity has only little effect on the response time. Even at a viscosities up to 100 cSt, the response time will not exceed 4 ms.

Product specification

Technical data

Table 1: Performance (EN 60770)

| | | |
|--|----------------------------------|-------------------------------|
| Accuracy (incl. non-linearity, hysteresis and repeatability) | | ≤ ± 0.5% FS (typ.) |
| | | ≤ ± 1.0% FS (max.) |
| Non-linearity BFSL (conformity) | | ≤ ± 0.2% FS |
| Hysteresis and repeatability | | ≤ ± 0.1% FS |
| Thermal error band (compensated temperature range) | | ≤ ± 1.0% FS |
| Response time | Liquids with viscosity < 100 cSt | < 4 ms |
| | Air and gases (MBS 3350) | < 35 ms |
| Overload pressure (static) | | 6 × FS (max. 1500 bar) |
| Burst pressure | | 6 × FS (max. 2000 bar) |
| Power-up time | | < 50 ms |
| Durability, P: 10 – 90% FS | | > 10 × 10 ⁶ cycles |
| MTTFd - Calculation based on the SN 29500 | | > 100 years |

Table 2: Electrical specifications

| | | | | |
|--|--|--|-------------------------------------|----------------------------------|
| Nom. output signal (short-circuit protected) | 4 – 20 mA | 0 – 5 V, 1 – 5 V, 1 – 6 V | 0 – 10 V | 10 – 90% of supply voltage |
| Supply voltage [U _B], polarity protected | 9 – 32 V DC (12 / 24 V DC nom.) | 9 – 32 V DC (12 / 24 V DC nom.) | 15 – 32 V DC (12 / 24 V DC nom.) | 4.5 – 5.5 V DC (5 V DC nom.) |
| Supply – current consumption | – | ≤ 5 mA | ≤ 8 mA | ≤ 5 mA - 5 V |
| Supply voltage dependency | < 0.1% FS / 10 V | < 0.05% FS / 10 V | | – |
| Ratiometricity | – | – | | < 0.05% FS / 4.5 - 5.5 V |
| Output limitation | 22.4 mA | 0-5 V: 5.75 V 1-5 V: 5.6 V 1-6 V: 6.75 V | 0-10 V: 11.5 V | ≈ supply voltage |
| Sink / Source | – | < 1 mA | | |
| Load [R _L] | R _L ≤ (U _B - 9 V) / 0.02 A | R _L ≥ 10 kΩ | R _L ≥ 15 kΩ | R _L ≥ 10 kΩ at 5 V DC |

Table 3: Environmental conditions

| | | | |
|--|-------------------------------------|-------------------------------------|--|
| Sensor operating temperature (depending on gasket material) | 4 – 20 mA | | -40 – 100 °C |
| | 10 – 90% of supply voltage | | -40 – 125 °C |
| | 0 – 5 V, 1 – 5 V, 1 – 6 V, 0 – 10 V | | |
| Media temperature range | | | -40 – 125 °C |
| Ambient temperature range (depending on electrical connection) | | | See Electrical connections |
| Compensated temperature range | | | 0 – 100 °C |
| Transport/storage temperature range | | | -50 – 125 °C |
| EMC – Emission | | | EN 61000-6-3 |
| EMC – Immunity | | | EN 61000-6-2 |
| Insulation resistance | | | > 100 MΩ at 500 V DC |
| Vibration stability | Sinusoidal | 15.9 mm-pp, 5 Hz – 25 Hz | IEC 60068-2-6 |
| | | 20 g, 25 Hz – 2 kHz | |
| | Random | 7.5 g _{rms} , 5 Hz – 1 kHz | IEC 60068-2-64 |
| Shock resistance | Shock | 500 g / 1 ms | IEC 60068-2-27 |
| | Free fall | 1 m | IEC 60068-2-32 |
| Enclosure (depending on electrical connection) | | | See Electrical connections |

Table 4: Explosive atmospheres

| | | |
|------------------------------------|--|----------------------|
| Zone 2 applications ⁽¹⁾ | II 3G Ex ec IIA T3 Gc -20 °C < Ta < +85 °C | EN60079-0; EN60079-7 |
|------------------------------------|--|----------------------|

⁽¹⁾ When used in ATEX Zone2 areas at temperatures < -10 °C the cable and plug must be protected against impact.










































































- Only versions with EN 175301-803-A, Screened cable, Flying leads, ISO 15170 Bayonet or Deutsch DT04-4p
- Deutsch DT04-4P: Must be installed in an enclosure that complies with the impact requirements in accordance to EN 60079-0

Pressure transmitter, type MBS 3300 and MBS 3350

Table 5: Mechanical characteristics








| | | |
|---|------------------------|--|
| Materials | Wetted parts | EN 10088-1; 1.4404 (AISI 316 L) |
| | Enclosure | EN 10088-1; 1.4404 (AISI 316 L) |
| | Electrical connections | See Electrical connections |
| | Pressure connections | See Electrical connections |
| Net weight (depending on pressure connection and electrical connection) | | 0.2 – 0.3 kg |

Dimensions/Combinations

| Type code | A1 | A6 | A9/H3 | F4 / DG | E3 | C8 |
|-----------|---|---|---|---|---|---|
| | EN 175301-803-A Pg 9 | EN 175301-803-A Pg 11 | EN 175301-803-A Pg13.5 and M20 | Cable screened ship 2 m / 3 m | IEC 61076-2-101; M12 x1 male excl. female plug | ISO 15170-A1-3-2-Sn Bayonet |
| |  |  |  |  |  |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |
| | | | | | |  |

Electrical connections

Table 6: Standard Electrical connections

| Type code See Dimensions/Combinations | A0 / A1 / A6 / A9 / H3 | DG | F4 | E3 | C8 |
|--|---|--|---|--|--|
| |  |  |  |  |  |
| Ambient temperature 4 - 20 mA output | -40 – 100 °C | -30 – 100 °C | -30 – 100 °C | -25 – 90 °C | -40 – 100 °C |
| Ambient temperature 0 - 5 V, 1 - 5 V, 1 - 6 V, 0 - 10 V and ratiometric output | -40 – 125 °C | -30 – 125 °C | -30 – 125 °C | -25 – 90 °C | -40 – 125 °C |
| Enclosure (IP protection fulfilled together with mating connector) | IP65 | IP67 | IP67 | IP67 | IP67 |
| Atex Zone 2 enclosure | IP54 | | | | |
| Material | Glass filled polyamid, PA 6.6 | RTFRO with PE shrinkage tubing | RTFRO with PE shrinkage tubing | Nickel plated brass, CuZn/Ni | Glass filled polyester PBT |
| Electrical connection, 4 – 20 mA output (2 wire) | Pin1: + supply Pin 2: ÷ supply Pin 3: not used  Earth: Connected to MBS enclosure | Black wire: + supply Blue wire: ÷ supply Brown wire: not used Screen: Connected to MBS enclosure | Black wire: + supply Blue wire: ÷ supply Brown wire: not used Screen: Connected to MBS enclosure | Pin1: + supply Pin 2: not used Pin 3: not used Pin 4: - supply | Pin1: + supply Pin 2: ÷ supply Pin 3: not used Pin 4: not used |
| Electrical connection, 0 – 5 V, 1 – 5 V, 1 – 6 V, 0 – 10 V and ratiometric output | Pin1: + supply Pin 2: ÷ supply ⁽¹⁾ Pin 3: + output  Earth: Connected to MBS enclosure | Black wire: + supply Blue wire: ÷ supply ⁽¹⁾ Brown wire: + output Screen: Connected to MBS enclosure | Red wire: + Supply Black wire: - supply ⁽¹⁾ Brown wire: Output Orange: not used Screen: not connected to MBS enclosure | Pin1: + supply Pin 2: not used Pin 3: + output Pin 4: - supply ⁽¹⁾ | Pin1: + supply Pin 2: output Pin 3: Ventilation Pin 4: ÷supply ⁽¹⁾ |

⁽¹⁾ Common

NOTE:

Please check [Store.danfoss.com](https://store.danfoss.com) to find the correct variant for your requirements

Ordering

Ordering standard

Figure 1: MBS ordering standard

MBS 33..

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| - | - | - | - | - | - | - | - | - | - |
|---|---|---|---|---|---|---|---|---|---|

| Type | |
|--------------------|----|
| Standard | 00 |
| with pulse-snubber | 50 |

| Measuring range | |
|----------------------------|-----|
| -1 – 4.0 bar ¹⁾ | 8 6 |
| -1 – 10 bar ¹⁾ | 8 8 |
| 0 – 1.0 bar | 1 0 |
| 0 – 1.6 bar | 1 2 |
| 0 – 2.5 bar | 1 4 |
| 0 – 4.0 bar | 1 6 |
| 0 – 6.0 bar | 1 8 |
| 0 – 10 bar | 2 0 |
| 0 – 16 bar | 2 2 |
| 0 – 25 bar | 2 4 |
| 0 – 40 bar | 2 6 |
| 0 – 60 bar | 2 8 |
| 0 – 100 bar | 3 0 |
| 0 – 160 bar | 3 2 |
| 0 – 250 bar | 3 4 |
| 0 – 400 bar | 3 6 |
| 0 – 600 bar | 3 8 |

| Gasket / O-ring material | |
|--------------------------|-------------------------------|
| 0 | No gasket |
| 1 | Gasket, Viton -20 °C – 125 °C |
| 2 | Gasket, NBR -40°C - 100°C |
| 3 | O-ring, Viton -20 °C – 125 °C |
| 4 | O-ring, NBR -40°C - 100°C |

| Pressure connection | |
|---------------------|--------------------------------------|
| A B 0 4 | G ¼ A (EN 837) (MBS 3300 only) |
| A B 0 8 | G ½ A (EN 837) |
| A C 0 4 | 1/4 - 18NPT |
| C D 2 8 | G ¼ female with flange ²⁾ |
| F B 0 4 | G1/4 (DIN 3852-G) |
| G B 0 4 | G ¼ (DIN 3852E) |

| Electrical connection | |
|-----------------------|--|
| A0 | 4 Pin male (EN 175301-803-A) |
| A1 | Angular connector (EN 175301-803-A), Pg 9 |
| A6 | Angular connector (EN 175301-803-A), Pg 11 |
| C8 | Bayonet plug; ISO 15170-A1-3.2-Sn |
| DG | Cable screened ship, 3 m |
| E3 | * IEC 61076-2-101, M12 x 1, male excl. female plug |
| F4 | Cable, screen, ship 2 m |
| H3 | Angular connector (EN 175301-803-A), M20 |

| Output signal | |
|---------------|----------------------------|
| 1 | 4 - 20 mA |
| 2 | 0 - 5 V |
| 3 | 1 - 5 V |
| 4 | 1 - 6 V |
| 5 | 0 - 10 V |
| 6 | 10 - 90% of supply voltage |

| Pressure reference | |
|--------------------|------------------|
| 1 | Gauge (relative) |
| 2 | Absolute |
| 3 | Sealed gauge |

NOTE:

Non-standard build-up combinations may be selected. However, minimum order quantities may apply. Please contact your local Danfoss office for further information or request on other versions.

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

Valid certificates and declarations

Table 7: Certificates and declarations

| File name | Document type | Document topic | Approval authority |
|---------------------------|---------------------------------|--------------------------|--------------------|
| 08472-E0 BV | Safety certificate | Marine approval | BV |
| TJ20PTB00030 | Safety certificate | Marine approval | CCS |
| 064G9615.11 | EU_UK Declaration | ATEX/EMC/RoHS | Danfoss |
| TAA000025S rev. 1 | Safety certificate | Marine approval | DNV GL |
| CPH 04967-AE006 | Safety certificate | Marine approval | KR |
| 2008558TA | Safety certificate | Marine approval | LR |
| TA20389M | Safety certificate | Marine approval | NKK |
| ELE098420XG | Safety certificate | Marine approval | RINA |
| CRN.0F18477.5123467890YTN | Pressure - Safety certificate | CRN | TSSA |
| E311982 | Electrical - Safety Certificate | - | UL |
| E494625 | Electrical - Safety Certificate | - | UL |
| E227388 | Electrical - Safety Certificate | Hazardous Locations | UL |
| E31024 | Electrical Safety Certificate | - | UL |
| SMS.W.II-2179-C.0 | Marine | Manufacturing Permission | BV |
| E510763 | Electrical - safety certificate | Hazardous Locations | UL |

Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.

Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at www.danfoss.com/en/service-and-support/downloads.

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.