Data sheet



Cartridge pressure switch

ACB / CCB

Fixed setpoints

Description

Pressure controls ACB and CCB are compact disc type pressure switches with fixed setpoints for long-standing use in refrigeration and air conditioning systems. They provide automatic or manual reset limit protection.

The small size, lightness and high degree of protection means that it can be mounted directly on the refrigeration systems.

The cartridge switch is available with different pressure settings and pressure connections to suit customer requirements.


All these features reduce installation costs and save space.

Features & benefits

- Wide range
- Automatic or manual reset
- Various port fittings for soldering or direct mounting
- Spades or cables
- Stripped ends or customer specific electrical plug
- Open or water-proof (IP65) version
- Type ACB for use as high and low pressure cut in and cut out as well as fan cycling
- Type CCB available for CO_2 refrigerants
- Fixed pressure set points
- Compact design and easy to install

Applications

Figure: Air conditioning and refrigeration

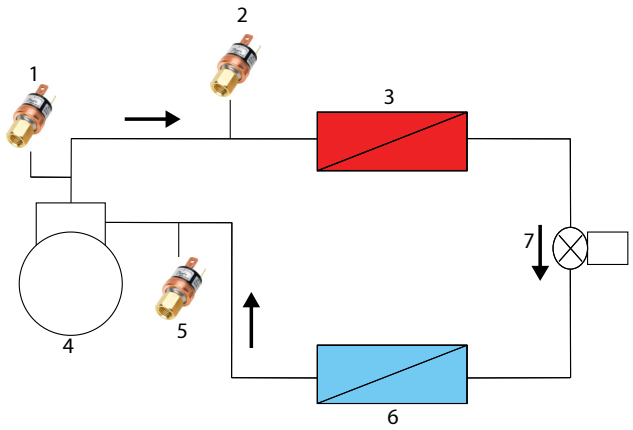

1	High Pressure
2	Fan Control
3	Condenser
4	Compressor
5	Low Pressure
6	Evaporator
7	Expansion valve

- Condenser fan switch
- Compressor stop-start
- Pump-down switch
- Low Pressure safety pressure switch
- High Pressure safety pressure switch

Ordering

Product code numbers

Type ACB

Table: High pressure cut out

Reset	Cut out	Cut in	Contact system / enclosure type W – water-proof types with cable (IP65) O – open (spade connector) types / no cable (IP00)	Connection type		
				Solder		Flare
	[bar] [psi]	[bar] [psi]		6 mm	¼ in	7/16 - 20 UNF with de-pressure pin
Auto.	18 ± 0.7 / 260 ± 10	13 ± 1.2 / 190 ± 17	SPST-NC / W	061F7504 ACB2UB504W	061F7505 ACB2UB505W	061F7506 ACB2UB506W
			SPDT / W	–	–	061F9057 ACB2UC59W
	20 ± 1 / 290 ± 14	16 ± 1.5 / 230 ± 21	SPST-NC / O	–	061F8710 ACB2UB210	061F8708 ACB2UB208
Auto.	23 ± 0.7 / 335 ± 10	19 ± 1.2 / 275 ± 17	SPST-NC / W	–	–	061F8494 ACB2UB465W
			SPST-NC / O	–	061F8707 ACB2UB207	–
			SPDT / W	–	–	061F9056 ACB2UC58W
Man.				–	–	061F9243 ACB2UC63MW
Auto.	26 ± 1 / 380 ± 15	20 ± 1.5 / 290 ± 22	SPST-NC / W	061F7507 ACB2UB507W	061F7508 ACB2UB508W	061F7509 ACB2UB509W
			SPST-NC / O	–	061F8705 ACB2UB205	061F8701 ACB2UB201
Man.			SPST-NC / W	061F9703 ACB2UB803MW	061F9714 ACB2UB814MW	061F9713 ACB2UB813MW
Auto.			SPDT / W	–	–	061F9055 ACB-2UC57W
Auto.	28 ± 1 / 405 ± 14	21 ± 1.5 / 305 ± 22	SPST-NC / W	061F7510 ACB2UB510W	061F7513 ACB2UB513W	061F7514 ACB2UB514W
Man.				–	–	061F9522 ACB2UB327MW
Auto.			SPST-NC / O	–	061F8704 ACB2UB204	061F8700 ACB2UB200
Auto.			SPDT / W	–	–	061F9054 ACB2UC56W
Man.				–	–	061F9242 ACB2UC62MW
Auto.	31 ± 1 / 405 ± 14	24 ± 1.5 / 350 ± 22	SPST-NC / W	061F8493 ACB2UB464W	–	061F8492 ACB2UB463W
			SPST-NC / O	–	061F8706 ACB2UB206	–
			SPDT / W	–	–	061F9053 ACB2UC55W
Auto.	42 ± 1.2 / 610 ± 17	33 ± 2 / 480 ± 29	SPST-NC / W	061F7515 ACB2UB515W	061F7516 ACB2UB516W	061F7517 ACB2UB517W
Man.				–	–	061F9575 ACB2UB461MW
Auto.			SPDT / W	–	–	061F9052 ACB2UC54W

NOTE:
Other code numbers are available upon request.

Table: Low pressure control

Reset	Cut out	Cut in	Contact system / enclosure type W – water-proof types with cable (IP65) O –open (spade connector) types / no cable (IP00)	Connection type		
				Solder		Flare
	[bar] [psi]	[bar] [psi]		6 mm	¼ in	7/16 - 20 UNF with de-pressure pin
Auto.	0.5 ± 0.4 / 7 ± 6	1.5 ± 0.5 / 22 ± 4	SPST-NO / W	061F7518 ACB2UA518W	061F7519 ACB2UA519W	061F7520 ACB2UA520W
			SPST-NO / O	–	061F7402 ACB2UA152	061F7400 ACB2UA150
			SPDT / O	–	061F9106 ACB2UC106	061F9102 ACB2UC102
Auto.	0.7 ± 0.5 / 10 ± 7	1.7 ± 0.4 / 25 ± 6	SPST-NO / W	061F7521 ACB2UA521W	061F7522 ACB2UA522W	061F7523 ACB2UA523W
			SPDT / W	–	–	061F9058 ACB2UC60W
Auto.	1.7 ± 0.5 / 25 ± 7	2.7 ± 0.4 / 39 ± 6	SPST-NO / W	061F7524 ACB2UA524W	061F7525 ACB2UA525W	061F7526 ACB2UA526W
Auto.	2.2 ± 0.3 / 32 ± 4.5	3.4 ± 0.3 / 50 ± 4.5	SPST-NO / W	061F7418 ACB2UA711W	–	–

Table: Fan control

Reset	Cut out	Cut in	Contact system / enclosure type W – water-proof types with cable (IP65) O – open (spade connector) types / no cable (IP00)	Connection type		
				Solder		Flare
	[bar] [psi]	[bar] [psi]		6 mm	¼ in	7/16 - 20 UNF with de-pressure pin
Auto.	8.5 ± 1.2 / 125 ± 17	11 ± 0.8 / 160 ± 12	SPST-NO / W	061F8491 ACB2UA393W	–	061F8490 ACB2UA392W
	13 ± 1.5 / 190 ± 22	16 ± 1 / 230 ± 14		061F8334 ACB2UA306W	–	061F8333 ACB2UA305W

Type CCB

Figure: Type CCB





Table: High pressure control

Reset	Cut out	Cut in	Contact system / enclosure type W – water-proof types with cable (IP65)	Connection type	
	[bar] [psi]	[bar] [psi]		Solder 6.35 mm	
				Packing 100 pcs.	Packing 20 pcs.
Auto.	100±10 / 1450±145	70±20 / 1015±290	SPST - NC / W	061F9808 CCB2UB03W	061F9908 CCB2UB03W
	110±10 / 1595±145	80±20 / 1160±290		061F9809 CCB2UB04W	061F9909 CCB2UB04W
	120±10 / 1740±145	90±20 / 1305±290		061F9810 CCB2UB05W	061F9910 CCB2UB05W
	130±10 / 1885±145	100±20 / 1450±290		061F9811 CCB2UB06W	–
	140±10 / 2030±145	100±20 / 1450±290		061F9812 CCB2UB07W	–
	150±10 / 2175±145	100±20 / 1450±290		061F9813 CCB2UB08W	–

Accessories code numbers

Figure: Rubber plug

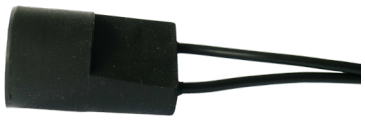

A wide variety of cartridge switches are available with open enclosure - no electric protection. For these switches a water-proof rubber plug has been specially designed.

When the plug is installed on the switch a water-proof seal IP64 is obtained. The water-proof rubber plug is available with many different cable lengths.

Table: Accessories

Standard cable length [m][(1)]	Packing quantity	Code No.
2.5	100	061F1302
6	100	061F1304

[(1)] Other cable lengths available upon request.

Media

Refrigerants

For flammable refrigerants please contact your nearest Danfoss office.

For complete list of approved refrigerants, visit www.products.danfoss.com and search for individual code numbers, where refrigerants are listed as part of technical data.

Type	ACB		CCB
	Water-proof (W)	Open-spade connector (O)	Water-proof (W)
Medium	R22, R134a, R404A, R407C, R407F, R410A, R438A, R448A, R449A, R452A, R513A		R744 (CO_2)

Product details

General data

Table: Technical data

Type	ACB		CCB
	Water-proof (W)	Open-spade connector (O)	Water-proof (W)
Range	-0.5 – 45 bar / -7 – 652 psi		100 – 150 bar / 1450 – 2176 psi
Reset	Automatic, Manual	Automatic	
Contact function	SPST-NO, SPST-NC, SPDT		SPST-NC
Electrical connections	AWG18 cables	Spades (size 6.35 mm x 0.8 mm)	AWG18 cables
Cable length	150 cm (black)	-	150 cm (black)
Contact load variants	6 A @ 250 V AC for SPST		
	4 A @ 250 V AC for SPDT		
	0,01 - 0,05 A @ 12/24 V DC		
Pressure connections	¼ in ODM solder		6.35 mm solder
	6 mm ODM solder		
	¼ in SAE female flare		
	with depressure pin		
Maximum working pressure PS / MWP	up to 50 bar / 725 psi (specs dependant)		165 bar / 2393 psi
Burst pressure	200 bar / 2900 psi		375 bar / 5440 psi
Media temperature	-55 – 135 °C / -67 – 275 °F		-30 – 100 °C / -20 – 210 °F
Ambient temperature	-30 – 85 °C / -20 – 185 °F		
Enclosure	IP65	No electrical protection	IP65


Customer specific features are available in a wide selection.

Lifetime

Switch type:
SPST auto reset, normally open
Pressure setting: max 3 MPa

As general rule, ACB pressure switches are capable to cover applications requiring cycling from 100000 to 1500000 cycles dependent on current load. The exact number of cycles in any of given application is to be determined by appropriate testing.


Manufacturer reserves the right to change or modify specifications at any time without prior notice.

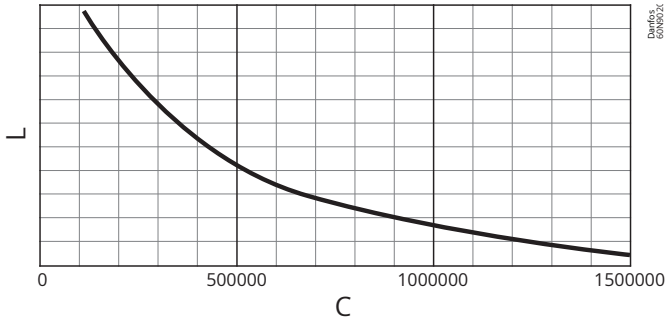

C	Number of cycles
L	Electrical load

SPST auto reset, normally close – up to 100000 cycles
SPST manual reset, normally close – 10000 cycles
SPDT auto reset – up to 100000 cycles
SPDT manual reset – 10000 cycles


Specification build up Type ACB

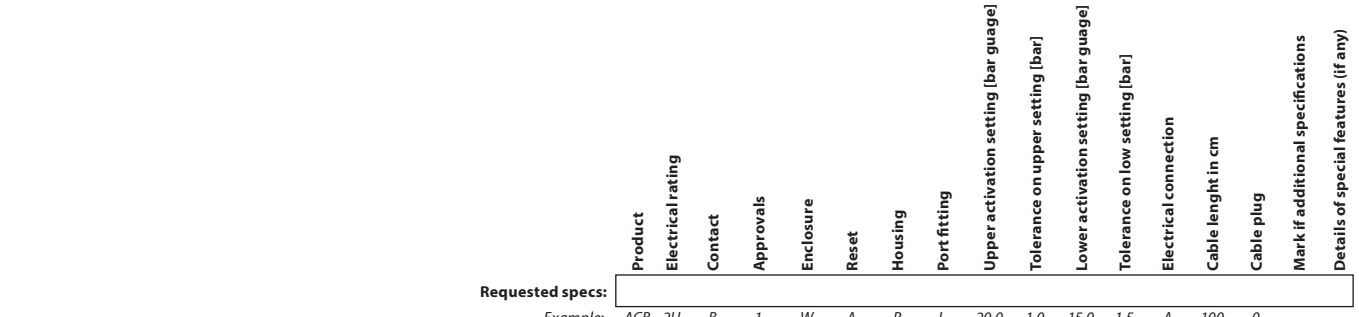

Field	Code	Explanation
Product		
Electrical rating		
	1U	1A @ 250V AC
	2U	6A @ 250V AC (SPST), 4A @ 250V AC (SPDT)
	4U	0,05A @ 12/24V DC (gold contacts)
Contact		
	A	SPST-NO
	B	SPST-NC
	C	SPDT
Approvals		
	0	CE [category II] approval
	1	CE [category II + IV], TÜV, VDE, UL & C-UL approvals (only with ACB)
	2	UL & C-UL approvals (only with ACB)
	3	CE [category II + IV] approval (only with ACB)
Enclosure		
	O	Open
	W	Waterproof IP65 (only with cables)
Reset		
	A	Automatic
	M	Manual (not SPST-NO; SPDT only in Panel mount housing)
Housing		
	R	Regular hot-melt
	E	Epoxy type
	P	Panel mount (mandatory for SPDT Manual reset versions)
Port fitting		
	M	1/4" SAE female flare w. deflator
	V	1/4" SAE female flare w. 1mm deflator
	H	1/4" SAE male flare
	P	1/4" solder Cu-tube (tip = 3 mm)
	X	1/4" solder Cu-tube (tip = 7 mm)
	S	1/4" solder Cu-tube (no tip)
	L	6 mm solder Cu-tube (tip = 7mm)
	E	1/8-27 NPT male
	Y	R (PT) 1/8"
Upper activation setting [bar guage]		
	--,-	
Tolerance on upper setting [bar]		
	-,-	+/- indicated value
Lower activation setting [bar guage]		
	--,-	
Tolerance on low setting [bar]		
	-,-	+/- indicated value
Electrical connection		
	A	AWG18 cables
	B	AWG16 cables
	C	AWG18 (UL 3173) cables
	S	90 deg. spades
	D	Double insulated AWG18 cables
	V	Double insulated H05VV5-F 2-in-1 cable (on request only, E housing only, Automatic reset only)
	R	Double insulated H05RNF 2-in-1 cable (on request only, E housing only, Automatic reset only)
	P	AWG18 with PVC tube
	H	AWG18 halogen free (RoHS compliant, currently E housing only)
Cable lenght in cm		
	---	Please use one of standard lengths: 020, 050, 080, 100, 150, 200 & 250 cm
Cable plug		
		(Leave blank if no cable)
	0	Cut ends
Faston	A	A1: AMP 170213-2, A2: AMP 170213-2, A3: OBR#250, A4: AMP 735222-2+AMP 735222-2, A5: AMP 170183-2, A6: AMP 170213-2
AMP	B	B1: AMP 350777-1, B2: AMP 282080-1, B3: AMP 282104-1, B4: AMP 192167-2, B5: AMP 881772-1, B6: AMP 174354-2
Molex	M	M1: 5557-02R
Pin connector	P	P1: Phoenix 3200250, P2: AMP 350218-1, P3: AMP 170213-2+AMP 926933-1, P4: AMP 926882-1, P5: AMP 165590-1
Packard	Q	Q1: 12010973, Q2: 12015792, Q3: 15300002, Q4: 15300027, Q5: 12020829
Stripped end	S	S1: stripped ends 15mm, S2: stripped ends 10mm
VHR	V	V1: VHR-2N, V2: VHR-3N
WAGO	W	W1: 231-302/026-000, W2: 769-102/021-000
Additional features		
		Leave blank if no additional specifications
	X	Please specify (clear text attachment)
Details of special features (if any)		

Design

Figure: ACB - SPST manual reset

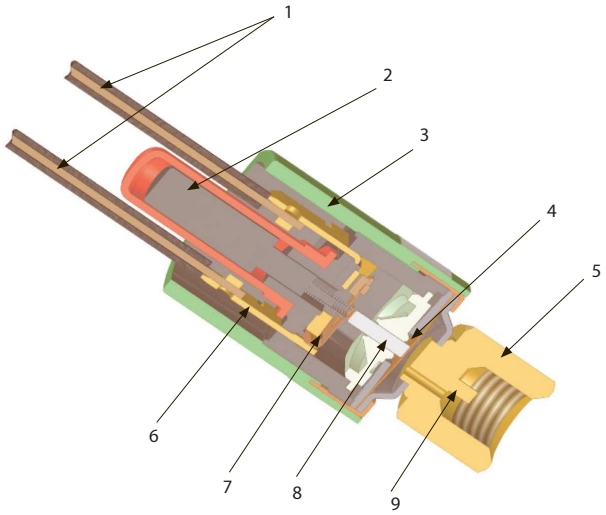

1	Wires
2	Reset button
3	Water-proof casing
4	Diaphragm
5	Pressure connection (¼ in female flare)
6	Electrical terminals
7	Micro-switch
8	Shaft
9	Depressure pin

As pressure is applied through the connection on to the diaphragm, the diaphragm is pushed up against the operation shaft.
When the operation shaft rises, it pushes up the contact plate, so that contacts become connected (in normally open) or disconnected (in normally closed).
As the pressure in the connection decreases, the diaphragm returns to its original state, and the operation shaft lowers, causing the contact plate to return to its original position.

Dimensions

Table: Type ACB – SPST water-proof

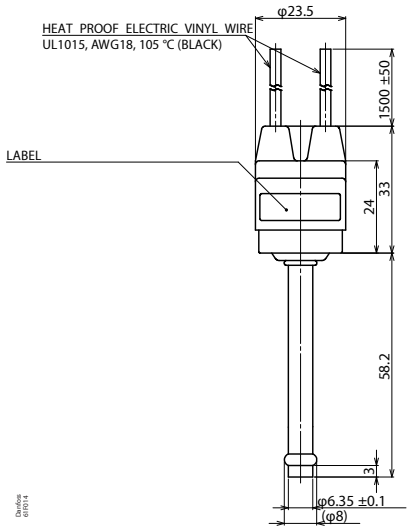
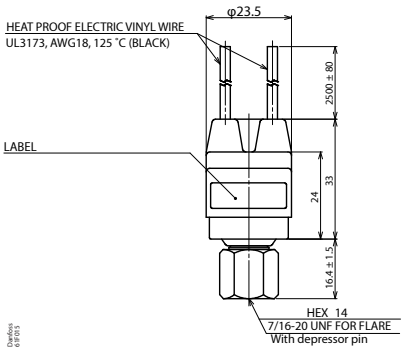
With automatic reset ¼ in solder type	With automatic reset female flare
	
Net weight: 0.072 kg	Net weight: 0.080 kg

Table: Type ACB – SPST water-proof

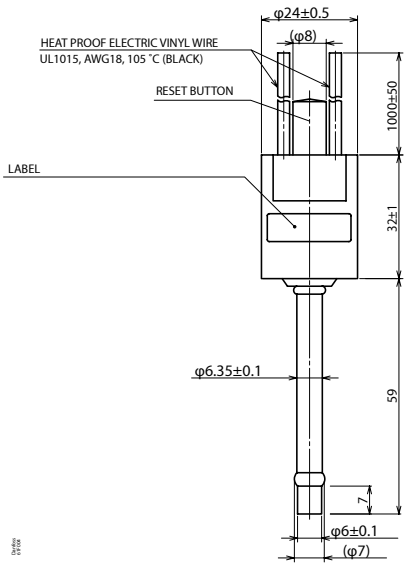
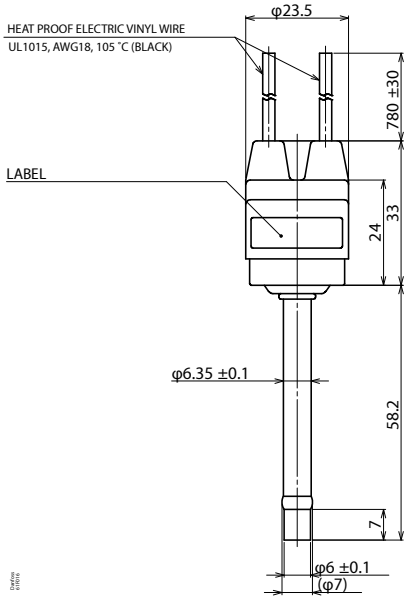
With manual reset 6 mm solder type	With automatic reset 6 mm solder type
	
Net weight: 0.078 kg	Net weight: 0.072kg

Table: Type ACB – SPDT

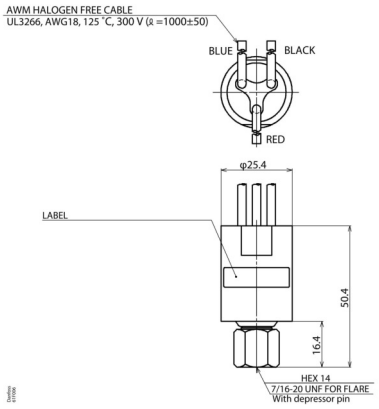
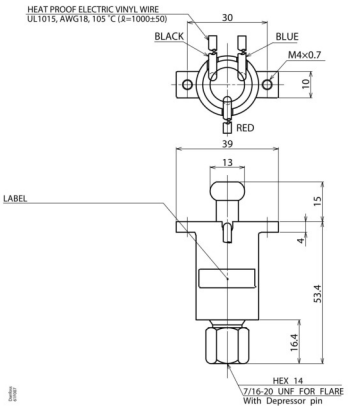
With automatic reset	With manual reset
	
Net weight: 0.114 kg	Net weight: 0.112kg

Table: Type ACB – SPDT open type

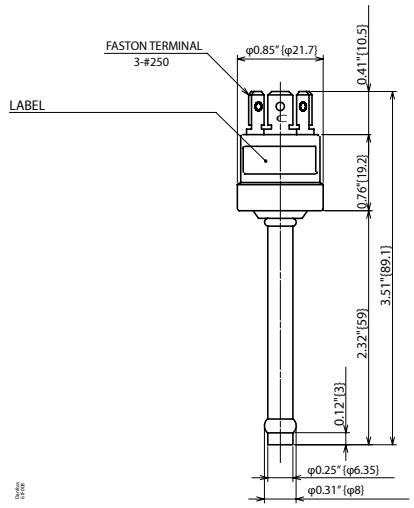
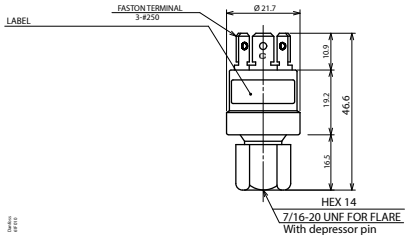
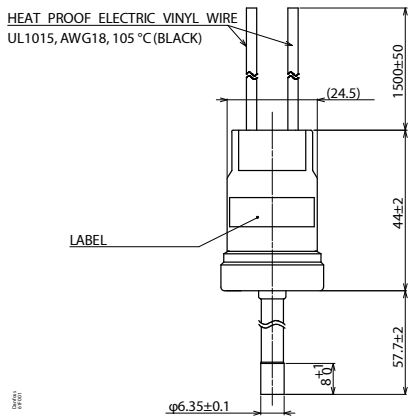





Solder type	With female flare
	
Net weight: 0.024 kg	Net weight: 0.029kg

Table: Type CCB - SPST water proof

With automatic reset 6.35 mm solder type

Net weight 0.125 kg

Connections

Table: Electrical connections

SPDT	SPDT with manual reset	SPST NO	SPST NC	SPST with manual reset
				

SPST - Single Pole Single Throw
SPDT - Single Pole Double Throw
(NO) - Normally Open
(NC) - Normally Closed

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Manufacturer's Declaration	Danfoss MD Saginomiya 01-16	Danfoss	China RoHS
Explosive Safety Certificate	UL E227388	UL - Underwriters Laboratories inc.	UL-CSA
Electrical Safety Certificate	UL E31024	UL - Underwriters Laboratories inc.	
UK Declaration	Danfoss UK Saginomiya 2022-11-04 ACB	Danfoss	Pressure
UA Declaration	Danfoss UA 2023-01-10 Regulators PL01 PL04	Danfoss	Pressure
Pressure Safety Certificate	LLC CDC EURO-TYSK UA.TR.089.1015.05-22	LLC CDC EURO TYSK - Ukraine	Pressure
UA Declaration	Danfoss UA 2024-07-25 cooling sensors	Danfoss	LVD
Quality Assurance Certificate	TÜV 01 202 931 Q-04 0018.00	TÜV Rheinland - Technischer ÜberwachungsVerein	Pressure
Export Control Declaration	Pressure switches & Thermostats	Danfoss	
EU Declaration	Danfoss EU Saginomiya 03-11-2025 ACB	Danfoss	LVD
Pressure Safety Certificate	TÜV 01 202 641-B-19-0020 04	TÜV Rheinland - Technischer ÜberwachungsVerein	Pressure

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.

The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.

The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.

Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.

Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.

Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.

Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest reginal news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.