


Data Sheet

Eco-Damper ICD damper, ICC Check valve and ICS control valve

(3 valve) system build on the ICV modular concept

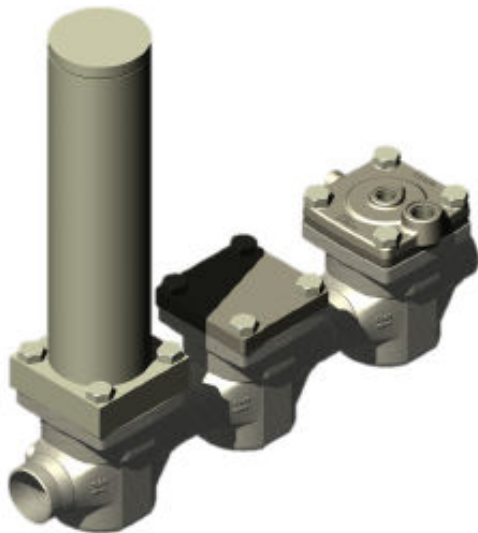

The Danfoss Eco-damper solution is a 3 component (3 valve) system build on the ICV modular concept.

Each component consists of an ICV housing and 1 of 3 modules performing the functions Dampening (ICD), Non-return (ICC) and Control (ICS 1 or 3 pilots) respectively.

The Danfoss Eco-damper solution is used in the economizer line of typical screw compressors to dampen the pulsations from the compressor.

The Eco damper system is designed for high damping efficiency over a broad band of low frequencies with neglectable pressure drop.

It comes in sizes 32 and 50 and is offered from a parts program giving a wide variety of connection types and sizes.

The ICD is a unique damping system combining the Helmholtz, Quarter wave and Expansion chamber principles into a broad band damper, able to reduce the Ammonia pulsations by 30% to 80% for critical frequencies in the frequency range of 100 to 500 Hz.

Features

- Designed for Industrial Refrigeration applications for a maximum working pressure of 52 bar / 754 psig.
- Applicable to R717 (Ammonia)
- Direct welded connections
- Connection types include butt weld, socket weld and solder connections
- Low temperature steel body
- Low weight and compact design
- The 3 top covers can be turned in any of 4 orientations without affecting the individual functions
- Manual opening of the solenoid valve (ie. the line) possible
- Robust PTFE seat secures long lasting solenoid valve function
- Service friendly design

Portfolio overview

ICD, ICC, ICS 32 & 50


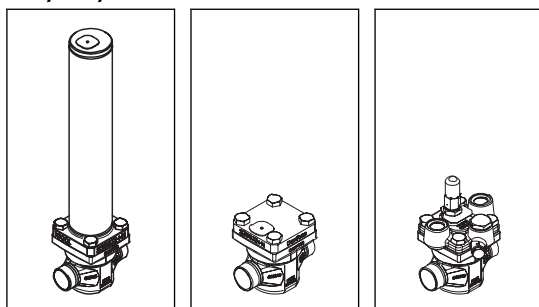


Table 1: Portfolio overview

| Description | ICD, ICC, ICS 32 | ICD, ICC, ICS 50 |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Valve body/connection material | Steel | Steel |
| Connection standard | EN 10220 ANSI (B 36.10) ANSI (B 16.11) EN 1254-1 ANSI (B 16.22) | EN 10220 ANSI (B 36.10) ANSI (B 16.11) EN 1254-1 ANSI (B 16.22) |
| Connection type | Butt weld Socket weld Solder connection | Butt weld Socket weld Solder connection |
| Min. opening differential pressure | ICS = 0,07 bar (1 psi) ICC = 0,04 bar (0.6 psi) | ICS = 0,07 bar (1 psi) ICC = 0,04 bar (0.6 psi) |
| Pressure differential for fully opening of the ICS and ICC valves | ICS = 0,2 bar (2.9 psi) ICC = 0,08 bar (1.2 psi) | ICS = 0,2 bar (2.9 psi) ICC = 0,08 bar (1.2 psi) |
| K_v (m³/h) | ICC = 16.6 ICD = 17.7 | ICC = 40.4 ICD = 39.4 |
| C_v (USgal/min) | ICC = 19.3 ICD = 20.6 | ICC = 47 ICD = 45.9 |
| Temperature range | ICD Temp. Range from -20 °C – 150 °C / - 4 °F – 302 °F ICC Temp. Range from -60 °C – 120 °C / -76 °F – 248 °F ICS Temp. Range from -60 °C – 120 °C / -76 °F – 248 °F | ICD Temp. Range from -20 °C – 150 °C / - 4 °F – 302 °F ICC Temp. Range from -60 °C – 120 °C / -76 °F – 248 °F ICS Temp. Range from -60 °C – 120 °C / -76 °F – 248 °F |
| Max. working pressure | 52 bar / 754 psig | 52 bar / 754 psig |

Functions

Figure 1: Functional diagram

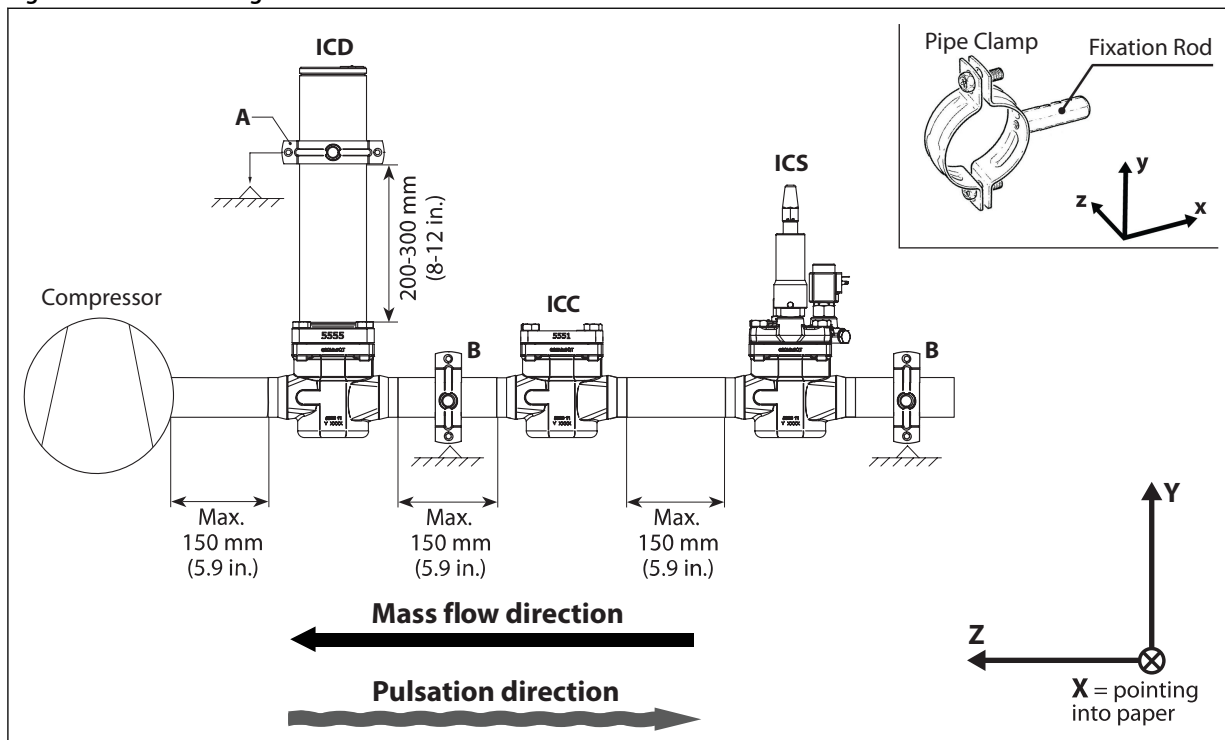

Though the refrigerant flow in the economizer line is towards the compressor, the pulsations moves in the opposite direction. Due to this phenomenon the sequence of the 3 components is important. Seen from the compressor the dampening comes first followed by flow alignment and flow control.

It is equally important to orientate the valve housings with the arrow pointing in the mass flow direction (pointing towards the compressor).

Distances between the single components are of great importance and recommendations must be followed.

The Eco damper is designed for high efficiency dampening of pulsation pressure peeks and creating unidirectional flow in economizer lines of Ammonia systems.

Depending on the RPM's and geometry of the typical screw compressor the frequency and amplitude of the pulsations in the economizer lines will vary.

The ICD damper is specifically designed for dampening of the critical Ammonia pulsations in the broad band of 100 to 500 Hz.

A simple calculation will clarify if a certain compressor set-up will result in pulsation frequencies between 100 and 500 Hz and this clarification should be made before considering the Eco damper solution. Please look into the Selection section.

The ICD is a unique damping system combining the Helmholtz, Quarter wave and Expansion chamber principles into a broad band damper, able to reduce the Ammonia pulsations by 30% to 80% for critical frequencies in the specified frequency band.

The ICC non-return/check valve is a robust valve optimized to withstand pulsations in the same low frequency band. The ICC features the ability to reduce small pulsating movements in the wrong direction with an overall low pressure drop for the main flow direction.

The ICS control valve is the ordinary valve used for allround control purposes. In the Eco-Damper application the 3 pilot version is offered to be able to include more functions like solenoid and/ or pressure control. The solenoid function is the on/off function for the entire Eco-Damper.

The Eco-Damper solution must be assembled like shown in the above figure with the ICD next to the compressor followed by the ICC and finally the ICS.

NOTE:

In order to prevent exceeding vibrations caused by the ICD eigenfrequency, pipe clamps for fastening the ICD must be installed, and the max distances have to be followed (**Figure 1: Functional diagram**. Pos. A and B are mandatory). The pipe clamp for pos. A is included in the box. The B pipe clamps and the support must be strong and robust fixation points to help reduce vibrations.

As a guideline the values for stiffness of the clamp support can be found in following tables. For reference of coordinate system see **Figure 1: Functional diagram**. The pipe clamps at A and B have to provide the following minimum stiffness if the fixation rod is pointing in x-direction:

| In N/mm | A | B |
|---------|---------|---------|
| X | 275.000 | 375.000 |
| Y | 14.000 | 36.000 |
| Z | 14.000 | 36.000 |

The pipe clamps at B have to provide the following minimum stiffness if the fixation rod is pointing in y-direction (clamp at A remains unchanged):

| In N/mm | A | B |
|---------|---------|---------|
| X | 275.000 | 36.000 |
| Y | 14.000 | 375.000 |
| Z | 14.000 | 36.000 |

Selection


To determine the actual pulsation frequency of a compressor use this formula:

$$\text{Frequency} = \text{RPM (female)} * \text{number of grooves (female)} / 60 \text{ [Hz]}$$

Example: Frequency = 2000 * 6 / 60 = 200 Hz

If 100 Hz < Frequency < 500 Hz dampening is possible with the Eco damper.

Further selection should be based on housing size, connection size and capacity.

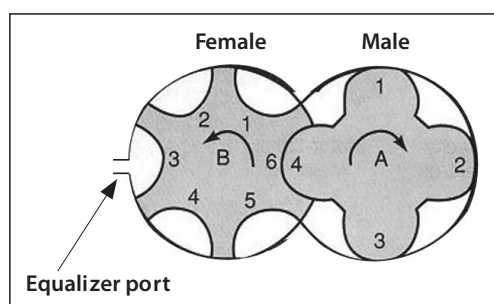

Capacity

Once the frequency range is confirmed to be within damper range, the next step is to find the right valve capacity.

For selection and capacity calculation please refer to [Coolselector®2](#)

For application and compressor model confirmation please contact Danfoss.

| Housing size | ICD connection size | ICC connection size |
|--------------|---------------------|---------------------|
| 32 | DN32 | DN32 |
| | DN40 | DN40 |
| 50 | DN50 | DN50 |
| | DN65 | DN65 |

These criteria should be used for selection.

Eco-Damper - ICD damper, ICC Check valve and ICS control valve

- Complete Eco-Damper solution (ICD+ICC): Lowest pressure drop @ min. and max. capacity
- Check ICC: Pressure drop min. @ minimum capacity (to be outside un-stable area) Check pressure drop max. @ maximum capacity
- Control/solenoid valve: Pressure drop @ min. and max. capacity
- Check control/solenoid valve: Pressure drop min. @ minimum capacity (to be outside un-stable area) Check pressure drop max. @ maximum capacity

i NOTE:

For assistance in relation to selection of right valve capacity please contact Danfoss.

Media

Refrigerants

Applicable to R717 (Ammonia)

New refrigerants

Danfoss products are continually evaluated for use with new refrigerants depending on market requirements.

When a refrigerant is approved for use by Danfoss, it is added to the relevant portfolio, and the R number of the refrigerant (e.g. R513A) will be added to the technical data of the code number. Therefore, products for specific refrigerants are best checked at store.danfoss.com/en/, or by contacting your local Danfoss representative.

Product specification

Pressure and temperature

Table 2: Pressure and temperature

| | |
|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Max. temperature range | Media: -60 °C – 120 °C / -76 °F – 248 °F. |
| Max. working pressure | 52 bar / 754 psig |
| Min. opening differential pressure | ICS = 0,07 bar (1 psi) ICC = 0,04 bar (0.6 psi) |
| Pressure differential for fully opening of the ICS and ICC valves | ICS = 0,2 bar (2.9 psi) ICC = 0,08 bar (1.2 psi) |
| K_v (m³/h) | Size 32: 17 Size 50: 44 |
| C_v (USgal/min) | Size 32: 20 Size 50: 51 |
| Coil requirement for ICS+EVM | Coils to be IP67 |
| Damping frequency range | 100 – 500Hz |
| Surface protection | For excellent corrosion protection all valve outer surfaces are zinc-chromated. The Damper module is painted. |

Material specification

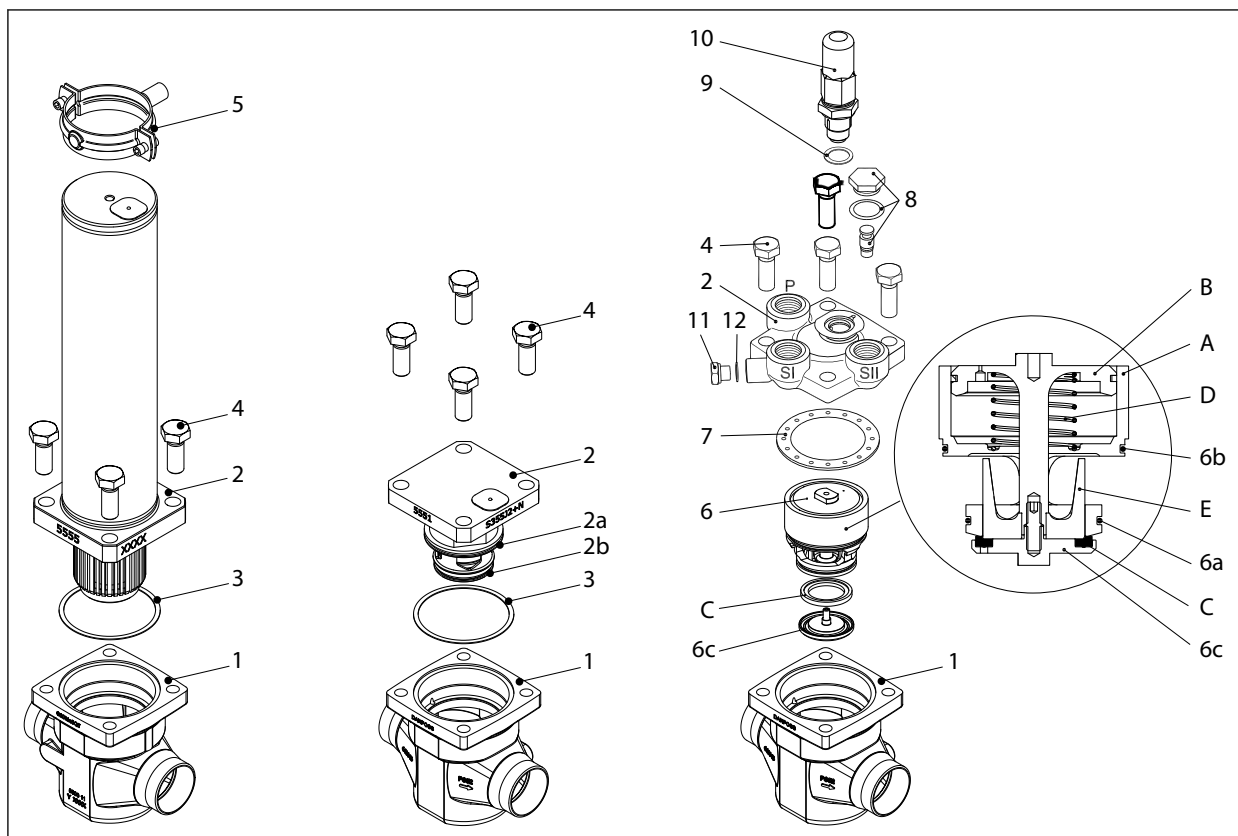


Table 3: Material specification

| No | Part | Material | EN | ASTM | JIS |
|----|--------------|-----------------------|----------------------------------------------|-----------------------|---------------|
| 1 | Body | Low temperature steel | G20Mn5QT EN 10213-3 | LCC A352 | SCPL1 G5151 |
| 2 | Top assembly | Low temperature steel | G20Mn5QT, EN 10213-3 P285QH+QT 10222-4 | LCC A352 LF2, A350 | SCPL1 G5151 |
| 2a | O-ring | Cloroprene (Neoprene) | | | |
| 2b | O-ring | Cloroprene (Neoprene) | | | |
| 3 | Gasket | Fiber, non-asbestos | | | |
| 4 | Bolts | Stainless steel | A2-70, EN 1515-1 | Grade B8 A320 | A2-70, B 1054 |

| No | Part | Material | EN | ASTM | JIS |
|----|-----------------------------|-----------------------|----|------|-----|
| 5 | Pipe support | Stainless Steel | | | |
| 6 | Function module (assembled) | | | | |
| 6a | o-ring | Cloroprene (Neoprene) | | | |
| 6b | o-ring | Cloroprene (Neoprene) | | | |
| 6c | Washer plate | Steel | | | |
| A | Cylinder | Steel | | | |
| B | Piston | Steel | | | |
| C | Valve plate | PTFE | | | |
| D | Spring | Steel | | | |
| E | Cone | Steel | | | |
| 7 | Gasket | Fiber, non-asbestos | | | |
| 8 | Plug | Steel | | | |
| 9 | Gasket | Aluminium | | | |
| 10 | Manual operating spindle | Steel | | | |
| 11 | Plug | Steel | | | |
| 12 | Gasket | Aluminium | | | |

Connections

The Eco-Damper concept

The Eco-Damper concept is developed to highest flexibility of direct welded connections. For valve sizes ICV 32 and 50 a wide range of connection sizes and types is available.

The direct welded (non-flanged) connections secures low risk of leakage.


Table 4: There are two valve bodies available



There is a wide range of connection types available:

- **D**: Butt weld, EN 10220
- **A**: Butt weld, ANSI (B 36.10)
- **SOC**: Socket weld, ANSI (B 16.11)
- **SD**: Solder connection, EN 1254-1
- **SA**: Solder connection, ANSI (B 16.22)

Table 5: Design (valve)

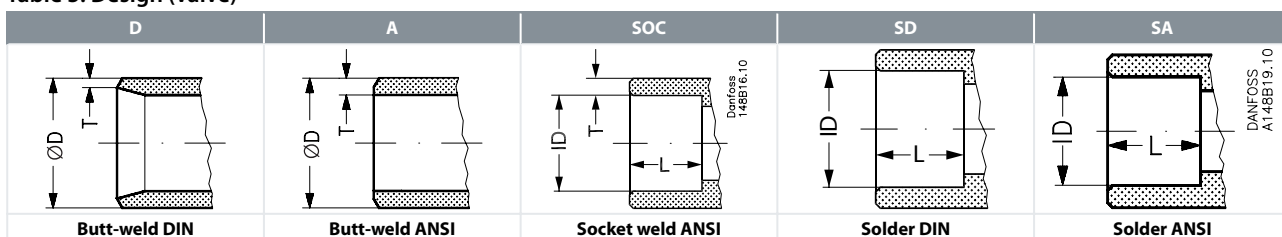

Dimensions and weights

ICD 32 and 50

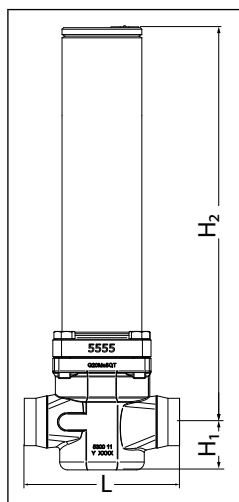


Table 6: Housing with module

| Connection | | H ₁ | H ₂ | L | Weight |
|----------------------|-----|----------------|----------------|------|----------|
| 32 D (1 1/4 in.) | mm | 40 | 482.57 | 145 | 7 Kg |
| | in. | 1.57 | 18.99 | 5.71 | 15.4 lbs |
| 40 D (1 1/2 in.) | mm | 40 | 482.57 | 145 | 6.8 Kg |
| | in. | 1.57 | 18.99 | 5.71 | 14.9 lbs |
| 32 A (1 1/4 in.) | mm | 40 | 482.57 | 145 | 6.8Kg |
| | in. | 1.57 | 18.99 | 5.71 | 15 lbs |
| 40 A (1 1/2 in.) | mm | 40 | 482.57 | 145 | 6.8 Kg |
| | in. | 1.57 | 18.99 | 5.71 | 15.1 lbs |
| 32 SOC (1 1/4 in.) | mm | 40 | 482.57 | 148 | 6.9 Kg |
| | in. | 1.57 | 18.99 | 5.83 | 15.3 lbs |
| 35 SD (1 3/8 in. SA) | mm | 40 | 482.57 | 148 | 6.8 Kg |
| | in. | 1.57 | 18.99 | 5.83 | 14.9 lbs |
| 42 SD (1 5/8 in.) | mm | 40 | 482.57 | 148 | 6.8 Kg |
| | in. | 1.57 | 18.99 | 5.83 | 14.9 lbs |
| 42 SA (1 5/8 in.) | mm | 40 | 482.57 | 148 | 6.8 Kg |
| | in. | 1.57 | 18.99 | 5.83 | 14.9 lbs |
| 50 D (2 in.) | mm | 59 | 503.74 | 200 | 12.2 Kg |
| | in. | 2.32 | 19.83 | 7.87 | 26.9 lbs |
| 65 D (2 1/2 in.) | mm | 59 | 503.74 | 210 | 12.6 Kg |
| | in. | 2.32 | 19.83 | 8.27 | 27.8 lbs |
| 50 A (2 in.) | mm | 59 | 503.74 | 200 | 12.3 Kg |
| | in. | 2.32 | 19.83 | 7.87 | 27.1 lbs |
| 65 A (2 1/2 in.) | mm | 59 | 503.74 | 210 | 12.6 Kg |
| | in. | 2.32 | 19.83 | 8.27 | 27.8 lbs |
| 50 SOC (2 in.) | mm | 59 | 503.74 | 216 | 13.4 Kg |
| | in. | 2.32 | 19.83 | 8.5 | 29.6 lbs |
| 54 SD (2 1/8 in. SA) | mm | 59 | 503.74 | 216 | 12.4 Kg |
| | in. | 2.32 | 19.83 | 8.5 | 27.2 lbs |

NOTE:

D = Butt-weld DIN ; A = Butt-weld ANSI ; J = Butt-weld JIS ; SOC = Socket weld ANSI ; SD = Solder DIN ; SA = Solder ANSI ; FPT = Female Pipe Thread

ICC 32 and 50

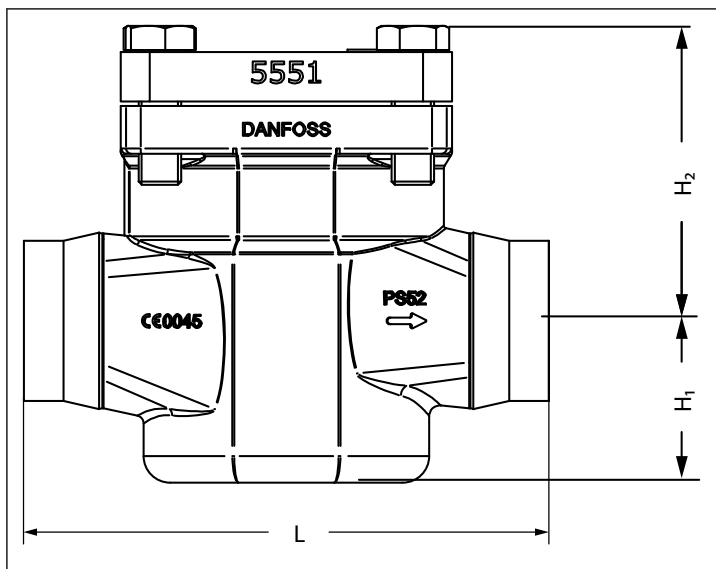


Table 7: Housing with top cover

| Connection | | H ₁ | H ₂ | L | Weight |
|----------------------|-----|----------------|----------------|------|----------|
| 32 D (1 1/4 in.) | mm | 40 | 86.8 | 145 | 6.5 Kg |
| | in. | 1.57 | 3.42 | 5.71 | 14.4 lbs |
| 40 D (1 1/2 in.) | mm | 40 | 86.8 | 145 | 6.6 Kg |
| | in. | 1.57 | 3.42 | 5.71 | 14.6 lbs |
| 32 A (1 1/4 in.) | mm | 40 | 86.8 | 145 | 6.6 Kg |
| | in. | 1.57 | 3.42 | 5.71 | 14.6 lbs |
| 40 A (1 1/2 in.) | mm | 40 | 86.8 | 145 | 6.7 Kg |
| | in. | 1.57 | 3.42 | 5.71 | 14.7 lbs |
| 32 SOC (1 1/4 in.) | mm | 40 | 86.8 | 148 | 6.8 Kg |
| | in. | 1.57 | 3.42 | 5.83 | 14.9 lbs |
| 35 SD (1 3/8 in. SA) | mm | 40 | 86.8 | 148 | 6.6 Kg |
| | in. | 1.57 | 3.42 | 5.83 | 14.6 lbs |
| 42 SD (1 5/8 in.) | mm | 40 | 86.8 | 148 | 6.6 Kg |
| | in. | 1.57 | 3.42 | 5.83 | 14.6 lbs |
| 42 SA (1 5/8 in.) | mm | 40 | 86.8 | 148 | 6.6Kg |
| | in. | 1.57 | 3.42 | 5.83 | 14.6 lbs |
| 50 D (2 in.) | mm | 59 | 111.25 | 200 | 9.1 Kg |
| | in. | 2.32 | 4.38 | 7.87 | 20 lbs |
| 65 D (2 1/2 in.) | mm | 59 | 111.25 | 210 | 9.5 Kg |
| | in. | 2.32 | 4.38 | 8.27 | 20.9 lbs |
| 50 A (2 in.) | mm | 59 | 111.25 | 200 | 9.1 Kg |
| | in. | 2.32 | 4.38 | 7.87 | 20.2 lbs |
| 65 A (2 1/2 in.) | mm | 59 | 111.25 | 210 | 9.5 Kg |
| | in. | 2.32 | 4.38 | 8.27 | 20.9 lbs |
| 50 SOC (2 in.) | mm | 59 | 111.25 | 216 | 10.3 Kg |
| | in. | 2.32 | 4.38 | 8.5 | 22.7 lbs |
| 54 SD (2 1/8 in. SA) | mm | 59 | 111.25 | 216 | 9.2 Kg |
| | in. | 2.32 | 4.38 | 8.5 | 20.3 lbs |

NOTE:

D = Butt-weld DIN ; A = Butt-weld ANSI ; J = Butt-weld JIS ; SOC = Socket weld ANSI ; SD = Solder DIN ; SA = Solder ANSI ; FPT = Female Pipe Thread

ICS 32 and 50

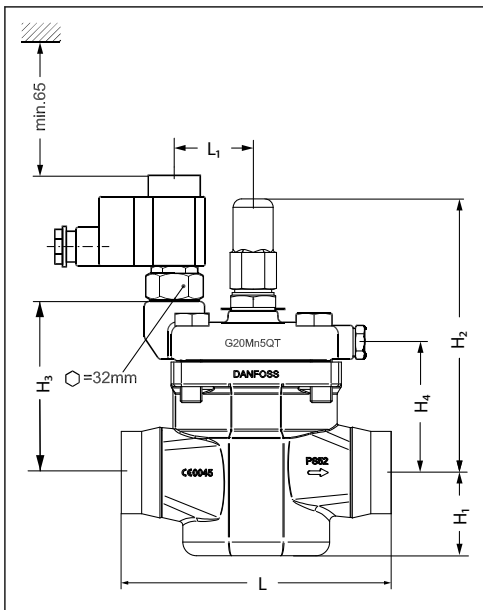


Table 8: Housing with module

| Connection | | H ₁ | H ₂ | H ₃ | H ₄ | L | L ₁ | L ₂ | B ₁ | B ₂ | Weight ICS 1 Pilot | Weight ICS 3 Pilots |
|----------------------|-----|----------------|----------------|----------------|----------------|------|----------------|----------------|----------------|----------------|--------------------|---------------------|
| 32 D (1 1/4 in.) | mm | 40 | 160 | 100 | 74 | 145 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.71 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 40 D (1 1/2 in.) | mm | 40 | 160 | 100 | 74 | 145 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.71 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 32 A (1 1/4 in.) | mm | 40 | 160 | 100 | 74 | 145 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.71 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 40 A (1 1/2 in.) | mm | 40 | 160 | 100 | 74 | 145 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.71 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 32 SOC (1 1/4 in.) | mm | 40 | 160 | 100 | 74 | 148 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.83 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 35 SD (1 3/8 in. SA) | mm | 40 | 160 | 100 | 74 | 148 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.83 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 42 SD (1 5/8 in.) | mm | 40 | 160 | 100 | 74 | 148 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.83 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 42 SA (1 5/8 in.) | mm | 40 | 160 | 100 | 74 | 148 | 51 | 15 | 51 | 87 | 4.5 kg | 5 kg |
| | in. | 1.57 | 6.3 | 3.93 | 2.91 | 5.83 | 2 | 0.59 | 2 | 3.43 | 9.9 lb. | 11 lb. |
| 50 D (2 in.) | mm | 59 | 181 | 120 | 93 | 200 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 7.87 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |
| 65 D (2 1/2 in.) | mm | 59 | 181 | 120 | 93 | 210 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 8.27 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |
| 50 A (2 in.) | mm | 59 | 181 | 120 | 93 | 200 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 7.87 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |
| 65 A (2 1/2 in.) | mm | 59 | 181 | 120 | 93 | 210 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 8.27 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |
| 50 SOC (2 in.) | mm | 59 | 181 | 120 | 93 | 216 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 8.5 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |
| 54 SD (2 1/8 in. SA) | mm | 59 | 181 | 120 | 93 | 216 | 51 | 15 | 63 | 91 | 8.9 kg | 9.2 kg |
| | in. | 2.32 | 7.13 | 4.72 | 3.66 | 8.5 | 2 | 0.59 | 2.48 | 3.58 | 19.6 lb. | 20.2 lb. |

NOTE:

D = Butt-weld DIN ; A = Butt-weld ANSI ; J = Butt-weld JIS ; SOC = Socket weld ANSI ; SD = Solder DIN ; SA = Solder ANSI ; FPT = Female Pipe Thread

Ordering

ICD, ICC, ICS 32

Ordering from the parts programme

Table 9: Example (select from table 10 to 13)





| | | | | | | |
|-----------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------|----------|------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|
|  | + |  | + |  | + |  |
| 3 x Valve body 32 D (1 1/4 in.) 027H3120 Table 10 | | 1 x Function module set ICD & ICC 027H3201 Table 11 | | 1 x Function module ICS 32 027H3200 Table 12 | | 1 x Top cover 3 pilots 027H3173 Table 13 |

Figure 2: ICV 32 valve body




Table 10: ICV 32 valve body w/different connections

| | | | |
|-----------------------------------------|-------------------------------------|---------------------------------------|--------------------------------------|
| 32 D (1 1/4 in.) 027H3120 | 40 D (1 1/2 in.) 027H3125 | 42 SA (1 5/8 in.) 027H3127 | 42 SD (1 5/8 in.) 027H3128 |
| 35 SD (1 3/8 in. SA) 027H3123 | 32 A (1 1/4 in.) 027H3121 | 32 SOC (1 1/4 in.) 027H3122 | 40 A (1 1/2 in.) 027H3126 |

NOTE:

D = Butt-weld DIN ; A = Butt-weld ANSI ; J = Butt-weld JIS ; SOC = Socket weld ANSI ; SD = Solder DIN ; SA = Solder ANSI ; FPT = Female Pipe Thread

Figure 3: ICD & ICC




Table 11: ICD & ICC function module set

| Description | Code Number |
|-------------------------|-----------------|
| ICD & ICC 32 | 027H3201 |

NOTE:

Including bolts, gaskets and o-rings

Figure 4: ICS 32




Table 12: ICS 32 function module

| Description | Code Number |
|-------------|-------------|
| ICS 32 | 027H3200 |

NOTE:

Including gasket and O-rings

Figure 5: Top cover 1 Pilot Figure 6: Top cover 3 Pilots





Table 13: ICS 32 top cover

| Description | Code Number |
|--------------------|-------------------------|
| Top cover 1 Pilot | 027H3172 ⁽¹⁾ |
| Top cover 3 Pilots | 027H3173 ⁽²⁾ |

⁽¹⁾ Including bolts

⁽²⁾ Including bolts and one blanking plug

ICD, ICC, ICS 50

Ordering from the parts programme

Table 14: Example (select from table 15 to 18)

| | | | | | | |
|----------------------------------------------------------------------|---|----------------------------------------------------------------------------|---|------------------------------------------------------------------|---|-----------------------------------------------------------------|
| | + | | + | | + | |
| 3 x Valve body 50 D (2 in.) 027H5120 Table 15 | | 1 x Function module set ICD & ICC 027H5201 Table 16 | | 1 x Function module ICS 50 027H5200 Table 17 | | 1 x Top cover 3 pilots 027H5173 Table 18 |

Figure 7: ICV 50 valve body




Table 15: ICV 50 valve body w/different connections

| | | | |
|-----------------------------------|-----------------------------------|---------------------------------------|---------------------------------|
| 50 D (2 in.) 027H5120 | 65 D (2½ in.) 027H5124 | 54 SD (2 ⅛ in. SA) 027H5123 | 50 A (2 in.) 027H5121 |
| 50 SOC (2 in.) 027H5122 | 65 A (2 ½ in.) 027H5125 | | |

NOTE:

D = Butt-weld DIN ; A = Butt-weld ANSI ; J = Butt-weld JIS ; SOC = Socket weld ANSI ; SD = Solder DIN ; SA = Solder ANSI ; FPT = Female Pipe Thread

Figure 8: ICD & ICC




Table 16: ICD & ICC function module set

| Description | Code Number |
|-------------------------|-----------------|
| ICD & ICC 50 | 027H5201 |

NOTE:

Including bolts, gaskets and o-rings

Figure 9: ICS 50




Table 17: ICS 50 function module

| Description | Code Number |
|---------------|-----------------|
| ICS 50 | 027H5200 |

NOTE:

Including gasket and O-rings

Figure 10: Top cover 1 Pilot Figure 11: Top cover 3 Pilots





Table 18: ICS 50 top cover

| Description | Code Number |
|---------------------------|--------------------------------|
| Top cover 1 Pilot | 027H3172 ⁽¹⁾ |
| Top cover 3 Pilots | 027H3173 ⁽²⁾ |

⁽¹⁾ Including bolts

⁽²⁾ Including bolts and one blanking plug

Spare parts and accessories

Figure 12: Function module




Table 19: Function module

| Description | Code Number |
|------------------------|-------------|
| ICC 32 function module | 027H3202 |
| ICC 50 function module | 027H5202 |

Figure 13: Repair kit




Table 20: Repair kit

| Description | Code Number |
|-------------------|-------------|
| ICC 32 repair kit | 027H3039 |
| ICC 50 repair kit | 027H5017 |

NOTE:

Including bolts, gaskets and o-rings

Certificates, declarations, and approvals


The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.

Some approvals may change over time. You can check the most current status at danfoss.com or contact your local Danfoss representative if you have any questions.

The ICV valve concept is designed to fulfil global refrigeration requirements.

The individual components are CE, CRN and UL approved. For specific approval information, please contact Danfoss.

Table 21: Compliance

| ICD, ICC and ICS valves | |
|-----------------------------------------------------------------------------------|-----------------------|
|  | Nominal bore |
| | Classified for |
| | Category |

DN 32 - 50 (1 1/4 - 2 in.)

Fluid group I

II

Online support

Danfoss offers a wide range of support along with our products, including digital product information, software, mobile apps, and expert guidance. See the possibilities below.

The Danfoss Product Store



The Danfoss Product Store is your one-stop shop for everything product related—no matter where you are in the world or what area of the cooling industry you work in. Get quick access to essential information like product specs, code numbers, technical documentation, certifications, accessories, and more.

Start browsing at store.danfoss.com.

Find technical documentation



Find the technical documentation you need to get your project up and running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more.

Start searching now at www.danfoss.com/en/service-and-support/documentation.

Danfoss Learning



Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications, industry topics, and trends that will help you do your job better.

Create your Danfoss Learning account for free at www.danfoss.com/en/service-and-support/learning.

Get local information and support



Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest regional news, or connect with a nearby expert—all in your own language.

Find your local Danfoss website here: www.danfoss.com/en/choose-region.

Spare Parts



Get access to the Danfoss spare parts and service kit catalog right from your smartphone. The app contains a wide range of components for air conditioning and refrigeration applications, such as valves, strainers, pressure switches, and sensors.

Download the Spare Parts app for free at www.danfoss.com/en/service-and-support/downloads.

Coolselector®2 - find the best components for you HVAC/R system



Coolselector®2 makes it easy for engineers, consultants, and designers to find and order the best components for refrigeration and air conditioning systems. Run calculations based on your operating conditions and then choose the best setup for your system design.

Download Coolselector®2 for free at coolselector.danfoss.com.

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.