
Data sheet

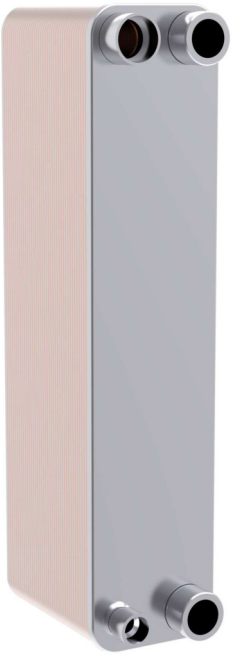

Micro Plate heat exchanger

MPHE C62L-CX / H62L-CX

For more efficient Chillers & Heat Pumps

Description

The C62(L)-CX & H62(L)-CX are condensers with asymmetric design optimized for use in R410A/R32 chillers and heat pumps with capacities of 20 – 110 kW.
The innovative Micro Plate technology and the asymmetric channel geometries, with different designs on the refrigerant and water sides, improve heat transfer, reduce the amount of material used and minimize pressure losses on the water side.

To meet demands for higher seasonal efficiency, the C62(L)-CX & H62(L)-CX is designed to work efficiently and increase comfort in modern buildings without increasing the carbon footprint.
Helping watercooled chillers perform more efficiently, it reduces both energy consumption and environmental impact. The low hold-up volume reduces the system refrigerant charge and offers valuable savings.

Features & benefits

- Minimal refrigerant hold-up volume
  - Smaller refrigerant charge
- High heat transfer
  - For a more efficient chiller
- Minimal pressure losses on secondary side
  - Less pump power
- Smaller footprint
  - Enabling more compactchiller
- Reduced CO_2 footprint
  - Environmentally friendly with high heat transfer and minimal refrigerant charge

Applications

The C62(L)-CX & H62(L)-CX are condensers applicable in different applications like heat pump and chiller systems. The C62(L)-CX & H62(L)-CX can operate also in evaporating mode and or de-frost mode, so it can be applicable in reversable systems.

Ordering

Product code numbers

Global or local standard code numbers can be accessed via Store.Danfoss.com on local subsites, with full set of technical data as well as relevant assets such as documentation and drawings. Since the portfolio may contain different types depending on country, this document contains only a summarized list of standard code numbers with a few data relevant for the product selection.

Configuring and calculating products

The C62(L)-CX & H62(L)-CX can be easily customized based on the application needs; model size can be evaluated using Hexact software
For details, product configuration and code creation please contact your Danfoss Sales representative

Accessories code numbers

MPHE products are not serviceable, i.e. cannot be taken apart and repaired, and there are no spare parts program. As for accessories, stud bolts, feet on front and/or back cover plates for mounting support and handling are available upon request.

Table: Stud bolts

Stud bolt position	Bolt sizes
327 mm, middle 140 x 100 mm, middle	M8 x 20 mm M8 x 25 mm M8 x 30 mm


Contact your Danfoss sales representative for further information.

Overview

Product portfolio

H62L-CX: High efficiency condenser optimized for R410A, and other high-density refrigerants, heat pump application
H62-CX: High efficiency condenser for medium density refrigerants, heat pump application
C62L-CX: High efficiency condenser optimized for R410A, and other high-density refrigerants, chiller application
C62-CX: High efficiency condenser for medium density refrigerants, chiller application

Table: Designation



a **Applications** **C:** chiller **D:** universal **H:** heat pump **HDW:** heat pump double wall	**d** **Specific duty** **E**= evaporator **C**= condenser **Plate design** Omit **L**: L-type **M**: M-type **H**: H-type **W**: W-type **X**: Asymmetric **Z**: Z flow **Configuration** Omit: single **D**: Dual circuit **U**: Mixing chamber	**e** **Distributor version** Omit **B** **F** ..... **Plate stacking sequence** Omit: a-b-a... **R**: b-a-b...
b **Platform*** 22,30,55,62,118... *heat exchanging surface per plate 1/1000 m^2		
c **Pressure Service** Omit: 30bar **L**: 45/49bar		**f** **Number of plates**** **Rule: -Single: even number -Dual: even number not multiple of 4

Functions

Operation

Preconditions:
N = number of plates
Max number of plates: 200

Media

Refrigerants


R410A, R452B, R454B, R32, R407C, R290

For other refrigerants please contact your Danfoss Sales representative.

Product details

General data

Configuration flow

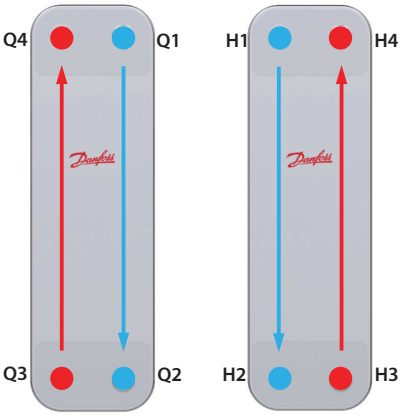

Parallel flow:
Q1 – Q2 [H1 – H2]: brine/secondary side
Q3 – Q4 [H3 – H4]: refrigerant/primary side

Hold up volume
Q1 – Q2 (l): 0.092 x N/2 [l]
Q3 – Q4 (l): 0.07 x (N-2)/2 [l]
N: Number of Plate

Materials

Table: Standard materials

Item	Material	Specification
Cover plates	Stainless steel	AISI 304L
Plates	Stainless steel	AISI 316L
Connections	Stainless steel	AISI 304L
Brazing filler	Pure copper	Cu

Other material combinations are available on request. Please contact your Danfoss sales representative for more information.


Pressure and temperature data

Min. working temperature: -196 °C (-320 °F)
Max. working temperature: 200 °C (390 °F)
Max. working pressure:
C62L-CX: 45 bar (653 psi)
H62L-CX: PED: 48 bar (696 psi) / UL: 45 bar (653 psi)
C62-CX, H62-CX: 30 bar (435 psi)

Note:

For details, refer to the Third party approvals chapter.

Dimensions

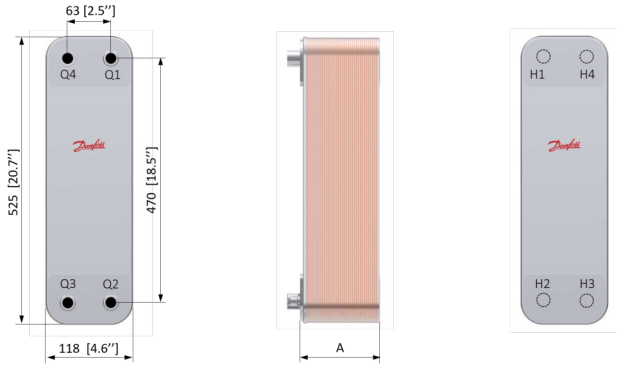

A: C62L-CX, H62L-CX: 11.5 + 1.74 x N [0.45 + 0.07 x N]C62-CX, H62-CX: 9.5 + 1.74 x N [0.37 + 0.07 x N]

N: Number of Plate

Weight*

C62L-CX, H62L-CX: 2.92 + 0.138 x N [kg] / 6.45 + 0.3 x N [lb]
C62-CX, H62-CX: 2.45 + 0.138 x N [kg] / 5.41+0.3 x N [lb]
N: Number of Plate

*Excluding connections and accessories

Connections

Mechanical connections

Circuits	Connection type options	Connection size option [in]
Q1 – Q2 (water-brine side)	BSP Gas male	½, ¾, 1, 1 ¼, 1 ½
	BSP Gas female	½, ¾, 1
	DIN R male	1, 1 ¼, 1 ½
	NPT	¾, 1, 1 ¼
	Victaulic	1 ¼, 1 ½
Q3 – Q4 (Refrigerant side)	Soldering	⅜, ½, ⅝, ¾, ⅞, 1 ⅛, 1 ⅜

Certificates, declarations and approvals

The list contains all certificates, declarations, and approvals for this product type. Individual code number may have some or all of these approvals, and certain local approvals may not appear on the list.



When you click on the link you will be directed to the latest version of the 'Declaration of Conformity'. Products developed and sold before this date of issue conform to the directives/standards in force at the time of their sale.

Approval type	Title	Certification body	Approval topic
Pressure Safety Certificate	BV CE-0062-PED-H-DAF 001-24-DNK	BV - Bureau Veritas	PED, Pressure
Pressure Safety Certificate	LLC CDC EURO TYSK UA.TR.089.0330.04.23	LLC CDC EURO TYSK - Ukraine	PED, Pressure
Manufacturer's Declaration	Danfoss UK-ROHS-MOD-202304-01.01	Danfoss	UK RoHS
Pressure Safety Certificate	BV CE-0062-PED-H-DMC 001-23-CHN-Rev.C	BV - Bureau Veritas	PED, Pressure
UA Declaration	Danfoss UA 2023-01-10 Heat Exchangers PL24 PL31	Danfoss	PED, Pressure
Manufacturer's Declaration	Danfoss MD UK-ROHS-MOD-202304-02.01	Danfoss	UK RoHS
Export Control Declaration	Micro Plate Heat Exchangers - Not dual use	Danfoss	
EU Declaration	Danfoss EU BF202604en-0002.02	Danfoss	PED, Pressure
Manufacturer's Declaration	Danfoss MD EU-ROHS-MD-202404-01.01	Danfoss	EU RoHS
Mechanical Safety Certificate	UL SA13363	UL - Underwriters Laboratories inc.	
Manufacturer's Declaration	Danfoss MD EU-RoHS-DoC-202309-01.01	Danfoss	EU RoHS
EU Declaration	Danfoss EU BF202407en-0001.01	Danfoss	PED, Pressure
Manufacturer's Declaration	Danfoss MD BPHE-RoHS-DOC-201601	Danfoss	China RoHS

Pressure Safety Certificate	NSW PDPRE7001748-24	NSW - New South Wales Government	Pressure

Third party approvals
All MPHE and BPHE are certified to European Pressure Equipment Directive (PED) and are approved by Underwriters Laboratories (UL).

Table: Third party approvals

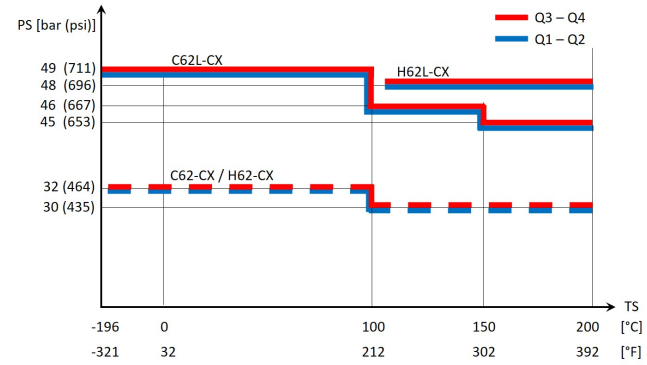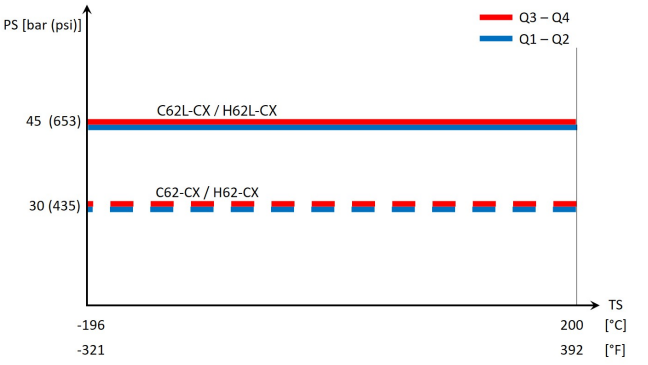Pressure Equipment Directive (PED)	Underwriters Laboratory Inc (UL)
	

Other certifications are available upon request: Kraia, EAC, UA, AS; for others and more details please contact your local Danfoss representative.

Contact details

Online support

Danfoss offers a wide range of support along with our products, including digital information, software, mobile apps and expert guidance. See the possibilities below.

The Danfoss Design center

Discover the Design Center, our advanced digital platform that streamlines product selection. With integrated tools and enhanced type pages, it's simpler than ever to access product information and documentation, and to select the right products. Check the availability of Danfoss products at partner locations and enjoy seamless transitions from selection to purchase with our basket-to-basket functionality. Whether you're buying from our distributors or directly from the Product Store, the Design Center simplifies your experience. Learn more at: designcenter.danfoss.com.

The Danfoss product store

The Danfoss Product Store is a one-stop shop available 24/7 for our customers, no matter where you are in the world or what area of industry you work in. Browse our catalog, check product details and documentation, view your prices and product availability, and quickly finalize your purchase. Start browsing at: store.danfoss.com.

Danfoss Partner Portal/Product Data tool

Designed to support you with easy access to product data extracts, essential resources, tools, and information. The Partner Portal provides a centralized hub for product documentation, training materials, marketing assets, and technical support, ensuring you have everything you need to succeed and grow your business with Danfoss. The Partner Portal is available 24/7 at: partner.danfoss.com and is ready to support your business.

Find technical documentation

Find technical documentation you need to get your project up running. Get direct access to our official collection of data sheets, certificates and declarations, manuals and guides, 3D models and drawings, case stories, brochures, and much more. Start searching now at: documentation.danfoss.com.

Danfoss Learning

Danfoss Learning is a free online learning platform. It features courses and materials specifically designed to help engineers, installers, service technicians, and wholesalers better understand the products, applications industry topics, and trends that will help you do your job better. Find your local Danfoss website here: learning.danfoss.com.

Get local information and support

Local Danfoss websites are the main sources for help and information about our company and products. Find product availability, get the latest reginal news, or connect with a nearby expert - all in your own language. Find your local Danfoss website here: danfoss.com.

Danfoss A/S

Climate Solutions . danfoss.com . +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues description, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the products. All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.