

The ABS terminal box range, DABP, with a IP 66, 67 protection degree, is available off the shelf in many different sizes. The DABP range is well suited for demanding environments, since water and dust are prevented from entering the terminal box, thus eliminating the risk for component failure, and with that unnecessary downtime.

: АБС-корпус без галогена пригоден для внутреннего применения. Низкая устойчивость к ультрафиолетовому излучению.

: АБС.

: Полиуретановый уплотнитель, встроенный в крышку корпуса.

: от -40°C до +60°C.

: UL94 HB.

: IP 66/67 | IK 06 (-25°C), IK 07 (+35°C).


: RAL 7035.

: Корпус, простая крышка, винты для крышки из нержавеющей стали, монтажные винты и заглушки из полиамида.


IP 66,67 | IK 06/07




Front view

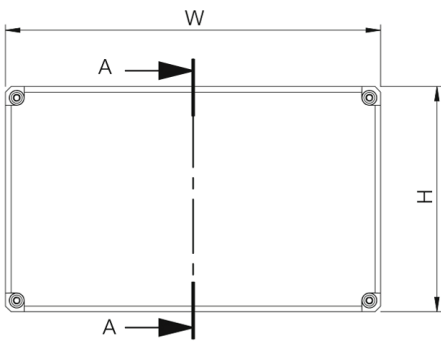


Sectional side view



Inside box view

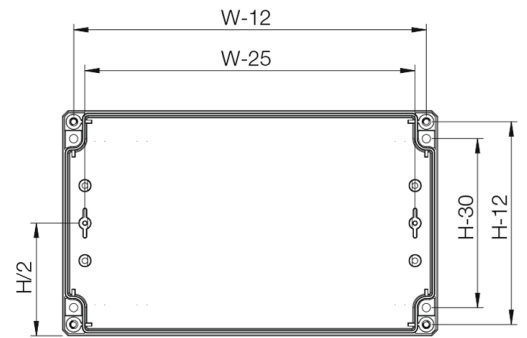

Top view

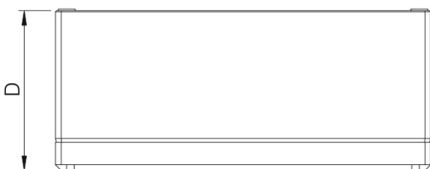

SECTION A-A

Box dimension				
B		R	Inner depth (mm)	..
53	55	36	27.5	DABP050504GE
53	65	36	25	DABP050704GE
80	82	56	42	DABP080806GE
80	82	86	72	DABP080809GE
80	120	56	42	DABP081206GE
80	120	86	72	DABP081209GE
80	160	56	42	DABP081606GE
80	160	86	72	DABP081609GE
120	122	56	42	DABP121206GE
120	122	86	72	DABP121209GE
120	160	91	77	DABP121609GE
120	200	86	72	DABP122009GE
150	200	76	62	DABP152008GE
160	240	91	77	DABP162409GE
160	240	121	107	DABP162412GE
230	300	86	72	DABP233009GE
230	300	111	97	DABP233011GE

Note: Terminal box with transparent cover fitted can be ordered by replacing GE with TE in the item number.

