

The aluminium operator interface control panel, OICP, has a pre-machined hole pattern to allow for the desired fixation to a swing arm, plus a removable front plate at a IP 65 protection degree. Components can be easily fitted thanks to the removable front plate, but will also be easily accessible through a removable rear panel. Side handles on the enclosure allow for easy movement of the enclosure into the desired working position. The aluminium body will dissipate more heat than a mild steel body, which may eliminate the need for additional ventilation.

: Корпус: AlMg Si05. Задняя панель: AlMg. Уголки: AISI 12.

: IP 65.


: Корпус и задняя панель: анодированный алюминий. Уголки: RAL 7016.

Mounting requirements: OIFP front panel is not included in the standard delivery and needs to be ordered separately.

: Корпус, прикрученная задняя панель, крепежный комплект фронтальной панели и монтажные аксессуары.

IP 65



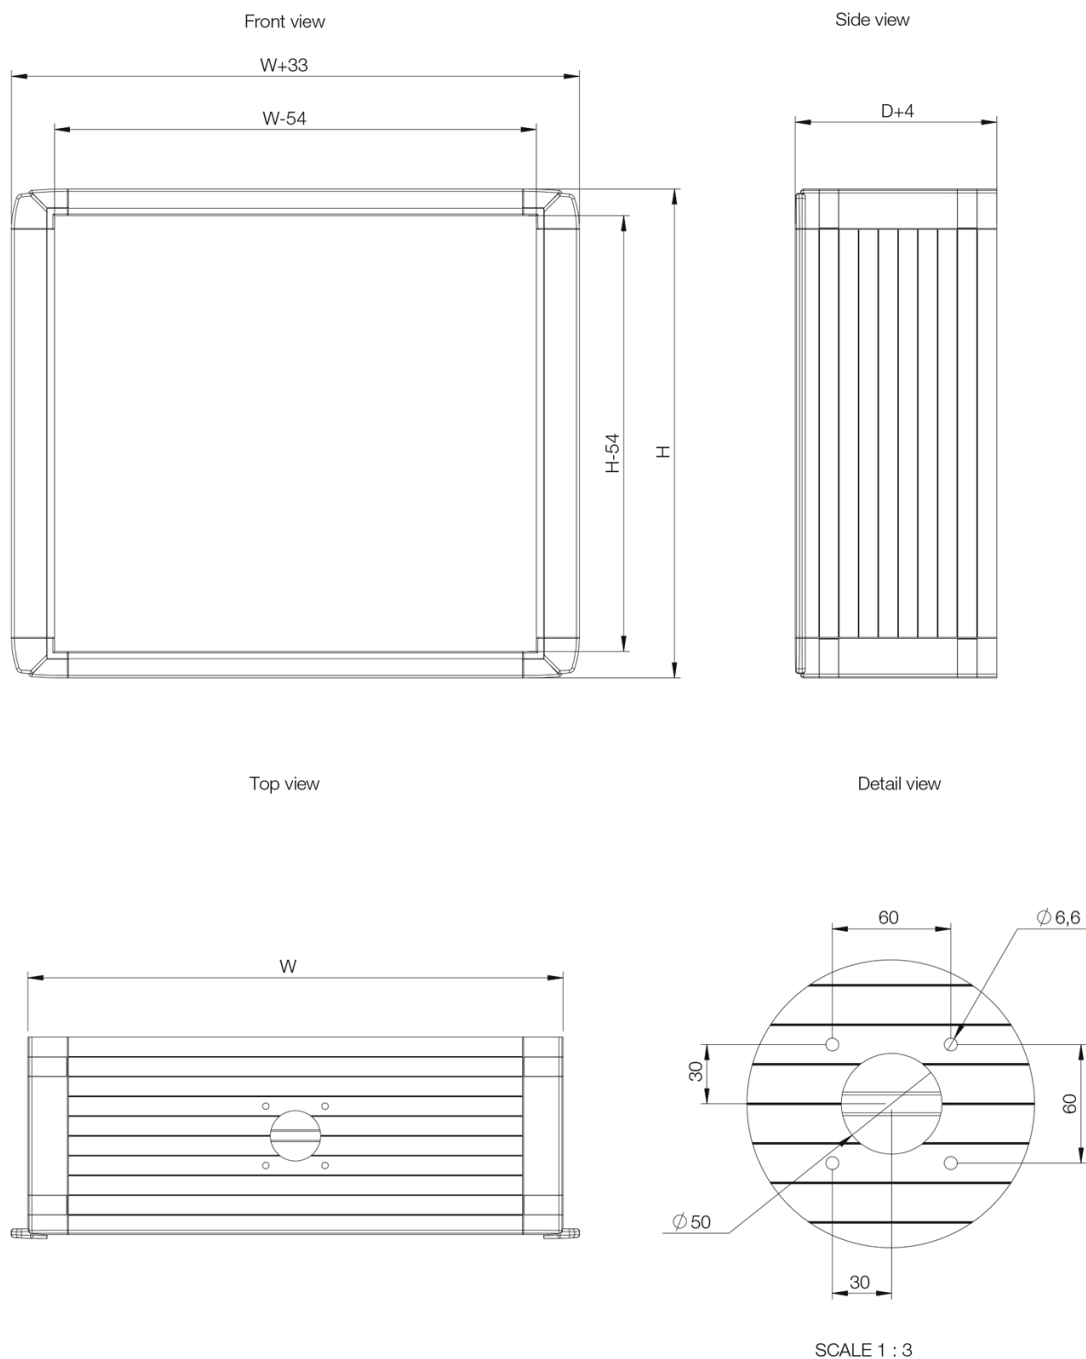

B		R	..
309	525	200	OICP305220
345	395	200	OICP343920
354	525	200	OICP355220
398	525	200	OICP395220
415	470	200	OICP414720
495	542	200	OICP495420

Внешне размер шкафа увеличивается на 16,5 мм, если установлена захватная рейка.

