

Type: **GSTA00-160/I43E-G**
 Article No.: **055871**




- Metric cable entry knockouts in all sides
- Degree of protection IP65
- Transparent cover
- Enclosure depth 150 mm
- Terminal for connecting the 4th conductor (PEN)
- Fuse switch–disconnecter fitted to sheet steel mounting plate
- Fixing straps for wall mounting
- Sealable cover fasteners

Ordering information


Enclosure depth		mm	150
Rated operational current	I_e	A	160 100
Rated operational voltage	U_e	V AC	500 690
Fuse cartridge		Size	NH00
5 th conductor can be retrofitted			K95/1N/BR

Dimensions

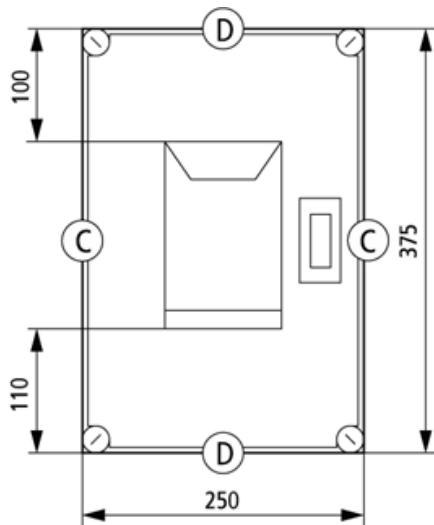

Note concerning the product

C




2 × M50/32

6 × M25/16

8 × M20

D



1 × M50/32

6 × M25/16

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
 E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
 Copyright 2006 by Moeller GmbH. Subject to modifications. HPL-C2006GB-INT V2.3