



## CONTACT MODULE S-PKZ2



Powering Business Worldwide™


Part no.

S-  
PKZ2(230V50HZ,240V60HZ)

Article no.

063696

### Delivery programme

Contact sequence				
Product range				Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012
Accessories				Contact module
Max. motor rating				
AC-3				
220 V 230 V 240 V				
220 V 230 V	P	kW	11	
380 V 400 V 415 V				
380 V 400 V	P	kW	20	
440 V	P	kW	22	
500 V	P	kW	24	
660 V 690 V				
660 V 690 V	P	kW	30	
Auxiliary contacts				
N/O = Normally open				1 N/O
N/C = Normally closed				1 N/C
For use with				PKZ2(4)
Actuating voltage				230 V 50 Hz, 240 V 60 Hz
<b>Notes</b>				
Clip plate for snap-fitting the combination to be ordered separately. Can be fitted to 3- or 4-pole circuit-breaker. With clip plate fitted, can be snap fitted onto one 15 mm or two 10 mm IEC/EN 60715 top-hat rails.				
Can be mounted separately using base (see below), RC suppressor on request				
The coil cannot be changed. The HI10-S-PKZ2 integral auxiliary contact is freely configurable. The auxiliary contact cannot be changed. with varistor suppressor present.				
High-capacity contact module Serial No.01 suitable for mounting with MV-PKZ2.				
<b>Notes</b>				
<b>Accessories</b>				
1 Motor-protective circuit-breakers, circuit-breakers				
3 Standard auxiliary contact				
4 Standard auxiliary contact				
5 Trip-indicating auxiliary contact				
6 Shunt releases, undervoltage releases				
7 Remote operators				
9 Clip plate				
Other actuating voltages				
Other accessories				
<b>Page</b>				

### Approvals


Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Specially designed for NA

UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking  
E36332  
NLRV  
12528  
3211-05  
UL listed, CSA certified  
No

## Technical data ETIM 4.0

Rated control voltage Us at AC 50 Hz	V	230
Rated control voltage Us at AC 60 Hz	V	240
Rated control voltage Us at DC	V	0
Design of contact module		Magnet system
Voltage type for actuation		AC

## Dimensions

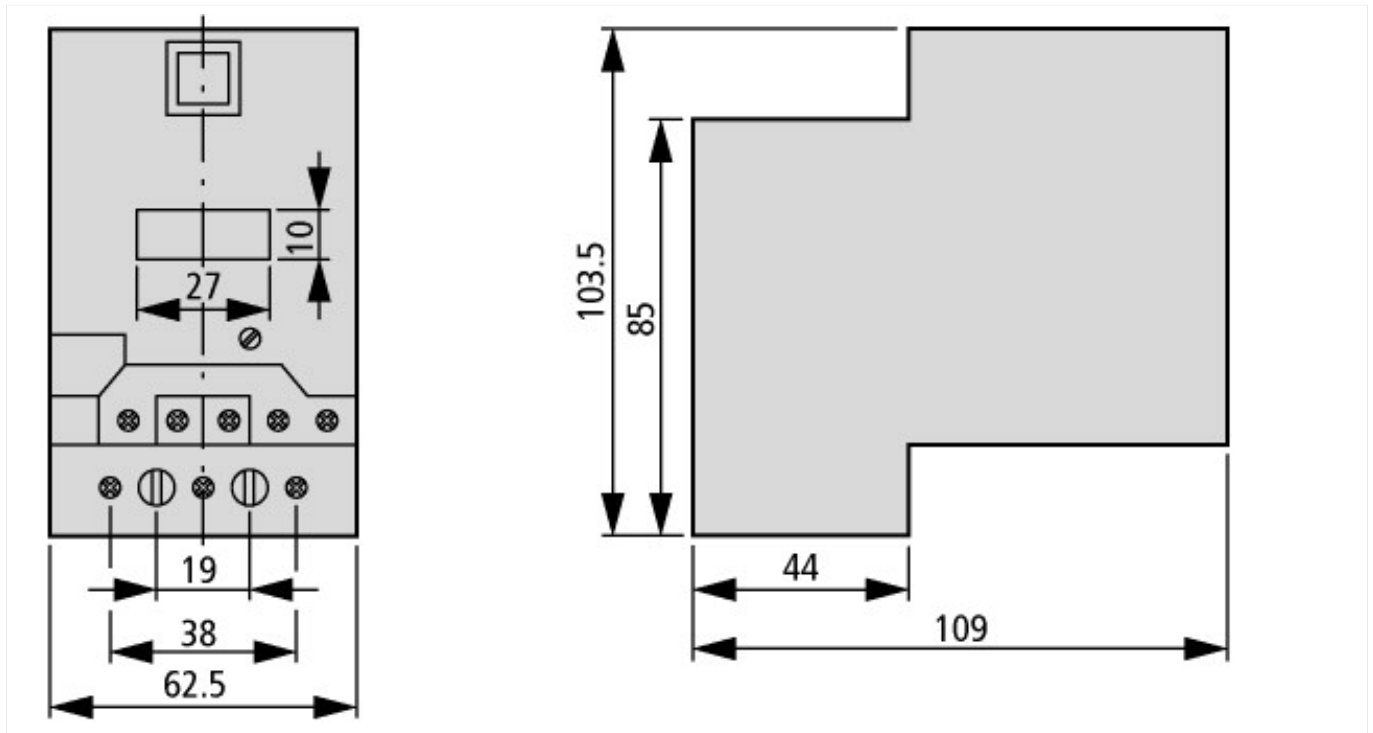

## Additional product information (links)

<b>AWA1280-1130 Auxiliary contact for contact module</b>	
	AWA1280-1130 Auxiliary contact for contact module
<b>AWA1280-1233 (High-capacity) contact module</b>	
	AWA1280-1233 (High-capacity) contact module
Motor starters and "Special Purpose Ratings" for the North American market	<a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a>
Busbar Component Adapters for modern Industrial control panels	<a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>