



CONTACT MODULE S-PKZ2



Powering Business Worldwide™


Part no.

SE1A/11-
PKZ2(400V50HZ,440V60HZ)

Article no.

063712

Delivery programme

Contact sequence				
Product range				Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012
Accessories				Contact module
Max. motor rating				
AC-3				
220 V 230 V 240 V				
220 V 230 V	P	kW	11	
380 V 400 V 415 V				
380 V 400 V	P	kW	20	
440 V	P	kW	22	
500 V	P	kW	24	
660 V 690 V				
660 V 690 V	P	kW	30	
Auxiliary contacts				
N/O = Normally open				1 M
N/C = Normally closed				1 V
For use with				PKZ2(4)
Actuating voltage				400 V 50 Hz, 440 V 60 Hz
Notes				
Clip plate for snap fitting the combination to be ordered separately. Can be fitted to 3 or 4-pole circuit-breaker. When combined with a clip plate can be snap fitted to one IEC/EN 60715 top-hat rail with 15 mm height or two with 15 mm height.				
Can be mounted separately using base (see below), RC suppressor on request.				
DC version: The coil cannot be changed. The HI10-S-PKZ2 integral auxiliary contact is freely configurable. The auxiliary contact cannot be changed.				
DC version with varistor suppressor present.				
High-capacity contact modules with serial no. 01 suitable for mounting with MV-PKZ2.				
Notes				
Accessories				
1 Motor-protective circuit-breaker, circuit-breakers				Page → 021859
3 Standard auxiliary contact				→ 090677
4 Standard auxiliary contact				→ 007623
5 Trip-indicating auxiliary contact				→ 017115
6 Shunt release, undervoltage release				→ 063967
7 Remote operators				→ 063676
9 Clip plate				→ 052710
Further actuating voltages				→ 026609
additional accessories				→ 026234

Approvals


Specially designed for NA

No

Technical data ETIM 4.0

Rated control voltage Us at AC 50 Hz	V	400
Rated control voltage Us at AC 60 Hz	V	440
Rated control voltage Us at DC	V	0
Design of contact module		Magnet system
Voltage type for actuation		AC

Dimensions

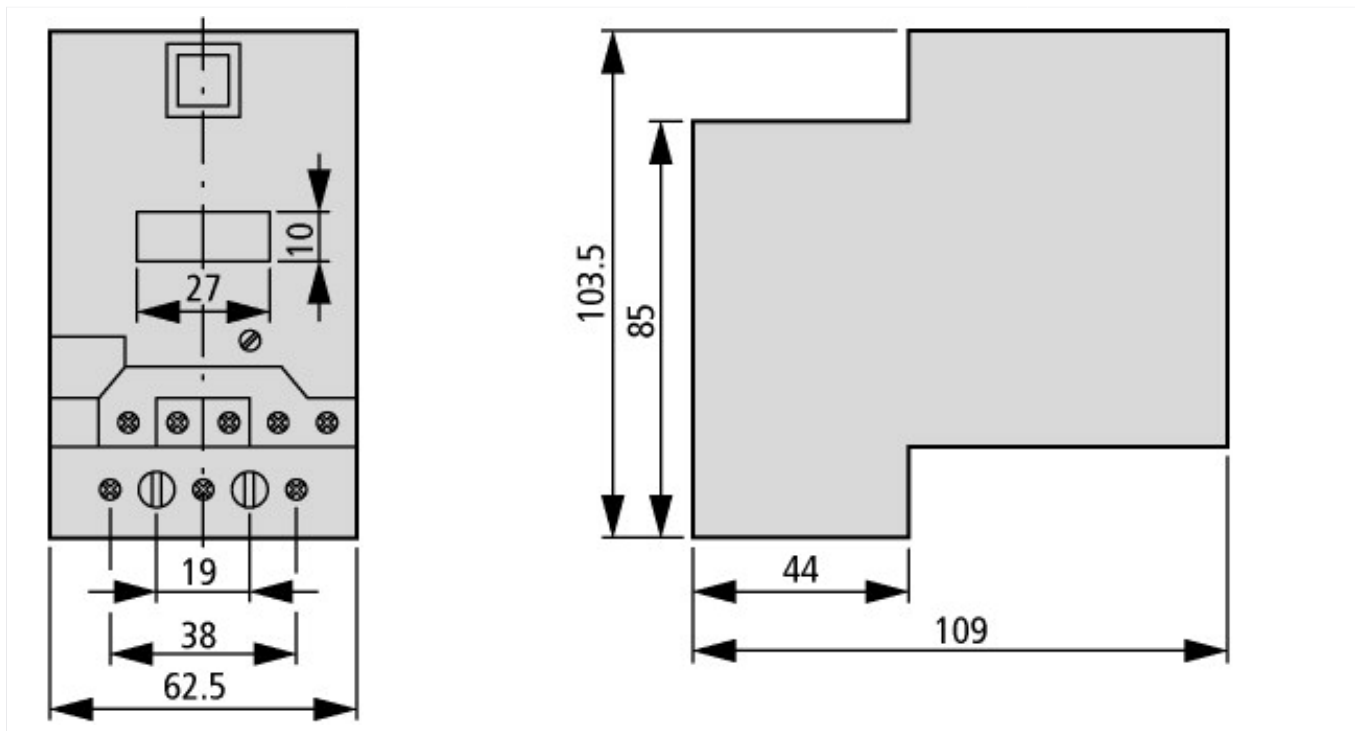

Additional product information (links)

AWA1280-1130 Auxiliary contact for contact module	
	AWA1280-1130 Auxiliary contact for contact module
AWA1280-1233 (High-capacity) contact module	
	AWA1280-1233 (High-capacity) contact module
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf