

Releases U,UHI,UV,UVHI-PKZ2

Powering Business Worldwide™

U-HI20-Part no.

PKZ2(230V50HZ,240V60HZ)

Article no. 065768

For AC

Delivery programme

Delivery programme	
Product range	Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012
Accessories	Shunt and undervoltage releases
	with auxiliary contacts for alternating voltage
Contact sequence	D1 2.13 2.23 U <
Contact diagram	On
	Off/Trip O + 1 L112L3 -

Notes

Can be fitted to motor-protective circuit-breaker, circuit-breaker, (high-capacity) compact starter

Can be combined with remote operator.

Two integral early-make contacts.

When combined with circuit-breaker, can be used as Emergency-Stop device to IEC/EN 60204.

When the circuit-breaker is in the tripped position "+", the auxiliary contacts are closed.

The undervoltage release can be energized early by means of an additional link (see circuit diagram). This function must not be used in conjunction with RE/RS-PKZ2 (remote operators).

Notes

Accesso	rie
	•••

1 Motor-protective circuit-breaker, circuit-breakers

7 Remote operators additional accessories

Page

→ 021859

→ 063676

→ 026234

Accessories

2 (High-capacity) compact starter

7 Remote operators

9 Clip plate

additional accessories

Further actuating voltages

Page

→ 063472

→ 063676

→ 052710

→ 026234 → 063364

Approvals

Product Standards

UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking

UL File No. UL CCN CSA File No. CSA Class No. NA Certification Specially designed for NA E29184 NKCR 12528 3211-05 UL listed, CSA certified No


Voltage releases

voitage releases			
Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			III/3
Terminal capacities		mm ²	
Solid or flexible conductor with ferrule		mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)
Solid or stranded		AWG	22 - 14
Rated operating voltage	U _e	V AC	24 - 600
Rated operating voltage	U _e	V DC	24 - 125
Drop-out voltage	x U _s		0.7 - 0.35
Power consumption			
AC			
Pick-up AC	Pick-up	VA	5
Sealing AC	Sealing	VA	3
DC		$x U_s$	
Pull-in DC	Pick-up	W	3
Rated operational current			
AC-15			
220 V 230 V 240 V	I _e	Α	6
380 V 400 V 415 V	I _e	Α	3
440 V	I _e	Α	1.5

Technical data ETIM 4.0

Delayed		No
Suitable for load-break switches		No
Suitable for overload relays		No
Design of electrical connection		Screw connection
Rated control voltage Us at AC 50 Hz	V	230
Rated control voltage Us at AC 60 Hz	V	240
Rated control voltage Us at DC	V	0
Suitable for motor protective circuit breakers		YES
Suitable for circuit breakers		YES
Voltage type for actuation		AC
Number of contacts as N/C		0
Number of contacts as N/O		2
Number of changeover contacts		0

Dimensions

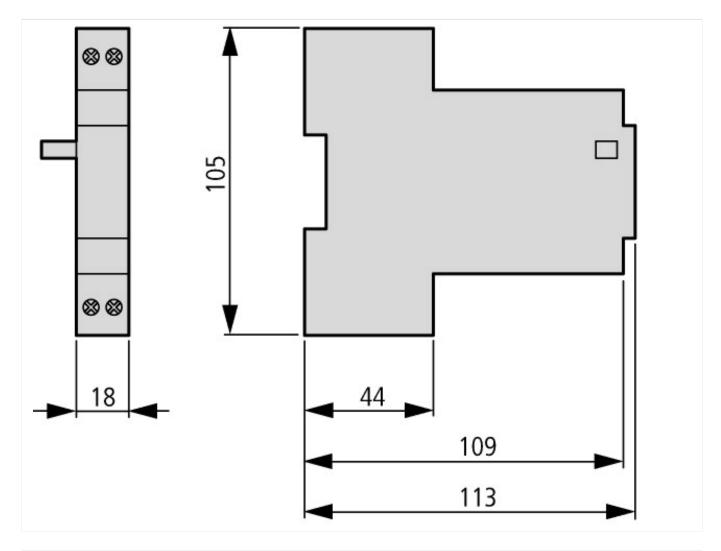

Additional product information (links)

AWA1280-1379 Undervoltage release, non-delayed with auxiliary contact		
	AWA1280-1379 Undervoltage release, non-delayed with auxiliary contact	
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf	
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf	