

Switch-disconnector, 4p, 2000A, fixed

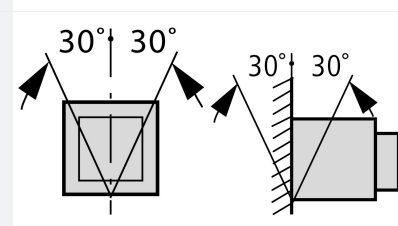
Part no. **IN32N4-20F**
 Catalog No. **124120**

Delivery program

| | | | |
|--------------------------------------------------------------------------------------------------------------|-------------|----|-------------------------------------------|
| Product range | | | Air circuit-breakers/switch-disconnectors |
| Product range | | | Open switch-disconnectors |
| Current Range | | | 4000 to 6300 A |
| Protective function | | | without protection |
| Installation type | | | Fixed |
| Construction size | | | IN32 |
| Standard/Approval | | | IEC |
| Number of poles | | | 4 pole |
| Degree of Protection | | | IP20, IP55 with protective cover |
| Rated current = rated uninterrupted current | $I_n = I_u$ | A | 2000 |
| up to 440 V 50/60 Hz | I_{cm} | kA | 69 |
| t = 1 s | I_{cw} | kA | 85 |
| t = 3 s | I_{cw} | kA | 65 |
| Notes | | | |
| Including rear connection main terminals and secondary terminal blocks according to ordered breaker options. | | | |

Technical data

General

| | | | |
|------------------------------|----------|----|--------------------------------------------------------------------------------------|
| Standards | | | IEC/EN 60947 |
| Ambient temperature | | | |
| Storage | θ | °C | -40 - +70 |
| Operating (open) | | °C | -25 - +70 |
| Mounting position | | |  |
| Utilization category | | | B |
| Degree of Protection | | | IP20, IP55 with protective cover |
| Direction of incoming supply | | | as required |

Main conducting paths

| | | | |
|-----------------------------------------------------|-------------|------|-------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A | 2000 |
| Rated uninterrupted current at 50 °C | I_u | A | 2000 |
| Rated uninterrupted current at 60 °C | I_u | A | 2000 |
| Rated uninterrupted current at 70 °C | I_u | A | 2000 |
| Rated impulse withstand voltage | U_{imp} | V AC | 8000 |
| Rated operational voltage | U_e | V AC | 690 |
| Use in IT electrical power networks up to U = 440 V | I_{IT} | kA | 28 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated insulation voltage | U_i | V | 1000 |

Switching capacity

| | | | |
|---------------------------------------------|----------|----|-----|
| Rated short-circuit making capacity | I_{cm} | | |
| up to 440 V 50/60 Hz | I_{cm} | kA | 69 |
| up to 690 V 50/60 Hz | I_{cm} | kA | 187 |
| Rated short-time withstand current 50/60 Hz | | | |
| t = 1 s | I_{cw} | kA | 85 |

| | | | |
|--------------------------------------------------------|-----------------|----|-------|
| t = 3 s | I _{cw} | kA | 65 |
| Operating times | | | |
| Closing delay via spring release | | ms | 35 |
| Break times | | ms | 40 |
| Total opening delay via shunt release | | ms | 30 |
| Total opening delay via undervoltage release | | ms | 35/70 |
| Maximum operating frequency | | | |
| Maximum operating frequency | Operations/h | | 60 |
| Heat dissipation at rated current I_n | | | |
| Fixed mounting | | W | 190 |
| Withdrawable units (switch with cassette) | | W | 380 |

Weight

| | | | |
|-----------------------|--|----|-----|
| Fixed mounting | | | |
| 3-pole | | kg | 68 |
| 4-pole | | kg | 86 |
| Withdrawable | | | |
| 3-pole | | kg | 80 |
| 4-pole | | kg | 102 |
| Cassette | | | |
| 3 pole | | kg | 58 |
| 4 pole | | kg | 60 |

Terminal capacities

| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|-------------|
| Copper bar | | | |
| Fixed mounting | | | |
| Black | | mm | 3 x 5 x 100 |
| Withdrawable units | | | |
| Black | | mm | 3 x 5 x 100 |
| Permissible continuous current for circuit-breakers operating in switchboards at various internal ambient temperatures. The switchboard's internal ambient temperature should be estimated using the calculation methods of IEC regulation. | | | |

Design verification as per IEC/EN 61439

| | | | |
|-----------------------------------------------|--|----|-----|
| Technical data for design verification | | | |
| Operating ambient temperature max. | | °C | -25 |
| Operating ambient temperature max. | | °C | 70 |

Dimensions

