




Liquid level monitoring relay, 1W, 220-240V50/60Hz, 5-100kOhm

Part no. **EMR4-N100-1-B**  
 Catalog No. **221789**  
 Eaton Catalog No. **EMR4-N100-1-B**  
 EL-Nummer **0004110397**  
 (Norway)

**Delivery program**

Product range			This item will continue to be available for a limited time only and is being replaced by the following item: 184756, EMR6-N1000-N-1
Basic function			EMR Measuring and monitoring relays
Monitoring of			Level monitoring relays
adjustable sensitivity range			Selectable: protection against running dry or overflowing
Contact sequence			Fill level of conductive liquids
Supply voltage			5 - 100 kΩ
Width	mm		220 - 240 V AC, 50/60 Hz
			

**Technical data**

**Technical data in sheet catalogue**

Other technical data (sheet catalogue)			Level monitoring relays
--	--	--	-------------------------

**Design verification as per IEC/EN 61439**

Technical data for design verification			
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 7.0

Relays (EG000019) / (Fill) level monitoring relay (EC001447)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Monitoring equipment (low-voltage switch technology) / Level monitoring relay (ec@ss10.0.1-27-37-18-13 [AKF107014])			
Type of electric connection			Screw connection
Rated control supply voltage Us at AC 50HZ		V	220 - 240
Rated control supply voltage Us at AC 60HZ		V	220 - 240
Rated control supply voltage Us at DC		V	0 - 0
Voltage type for actuating			AC
With detachable clamps			No
Number of inputs for electrodes			3
Min. adjustable operate delay time		s	0.25
Max. permitted operate delay time		s	0.25
Min. adjustable off-delay time		s	0
Max. permitted off-delay time		s	0
Response value sensitivity adjustable			Yes
Number of contacts as normally closed contact			0
Number of contacts as normally open contact			0
Number of contacts as change-over contact			1
Physical measurement principle			Conductive
Cascadable			No
Width		mm	23
Height		mm	78
Depth		mm	110


## Approvals

Product Standards			IEC 255-6; UL 508; CSA-22.2 No. 14-05; CE marking
UL File No.			E29184
UL Category Control No.			NKCR, NKCR7
CSA File No.			203843
CSA Class No.			3211-03
North America Certification			UL listed, CSA certified
Degree of Protection			IEC: IP20, UL/CSA Type: -


## Characteristics

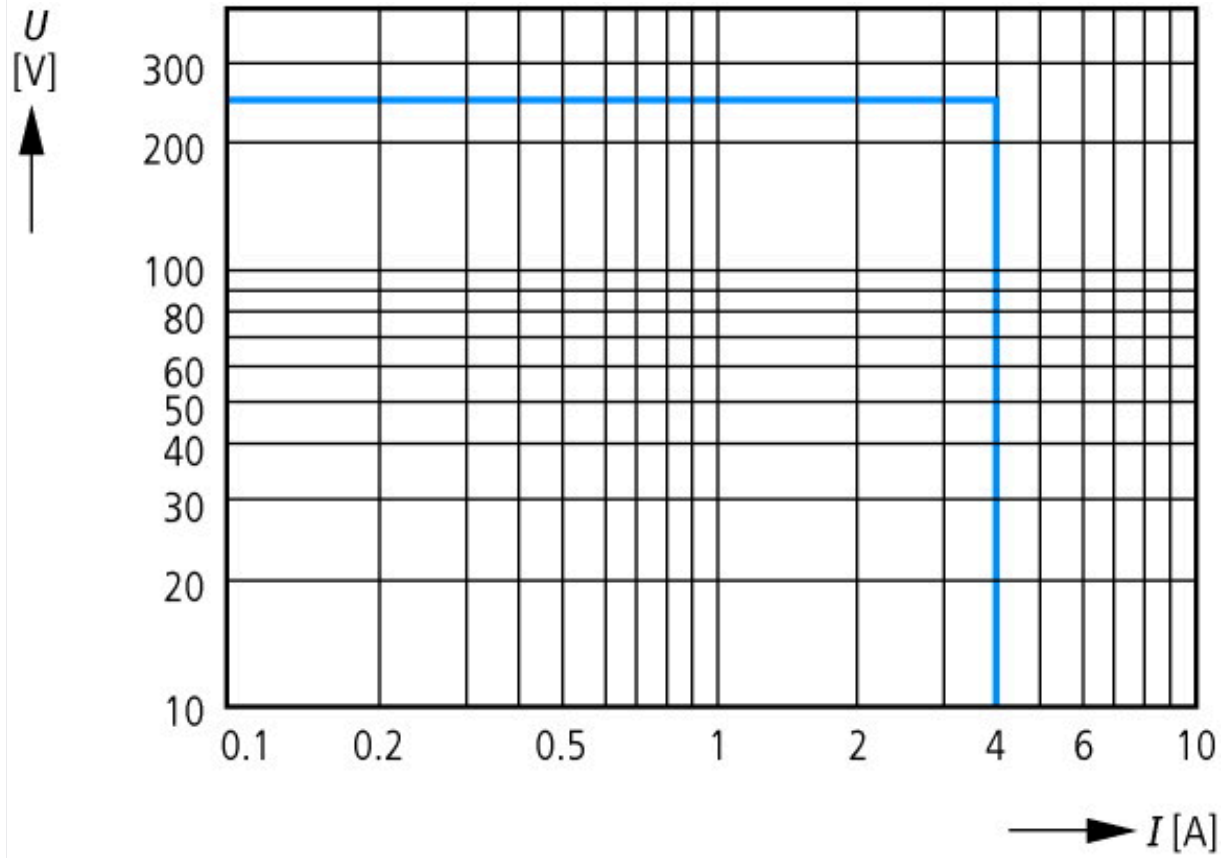


AC load (resistive)

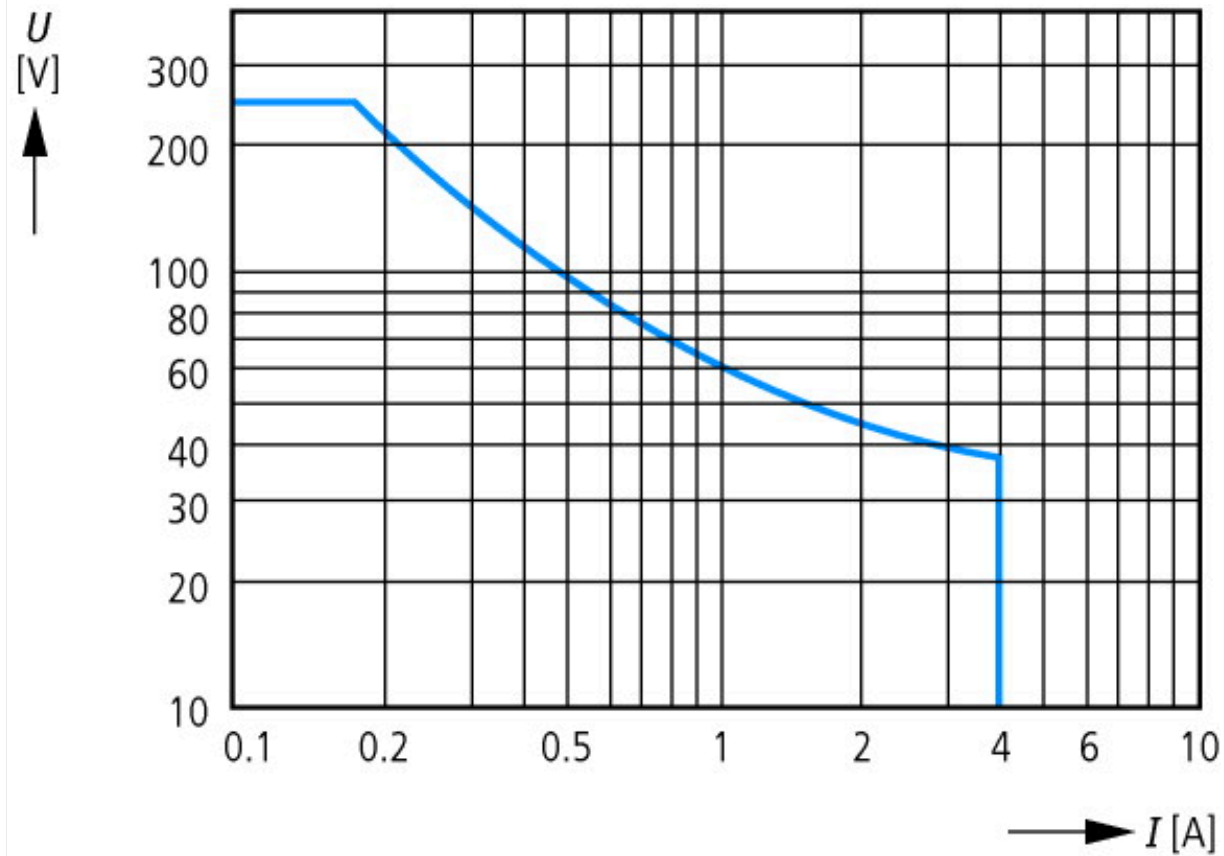

DC load (resistive)

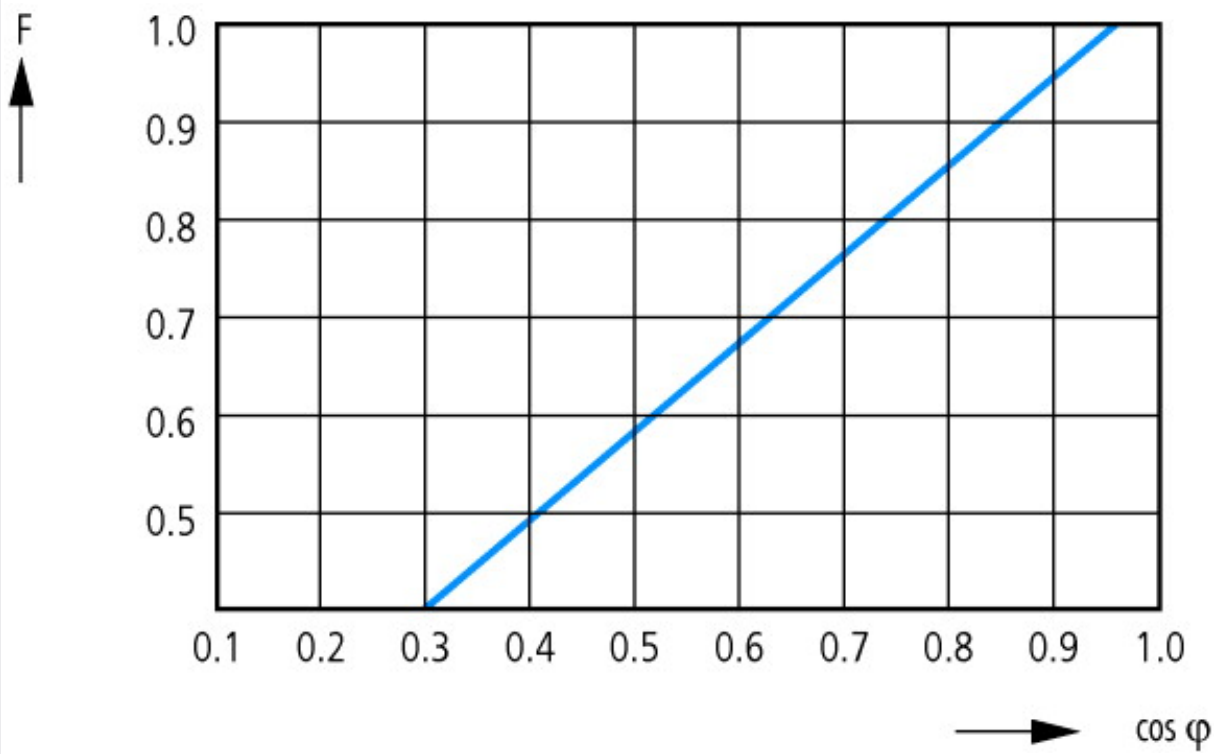


Derating factor F with inductive AC load

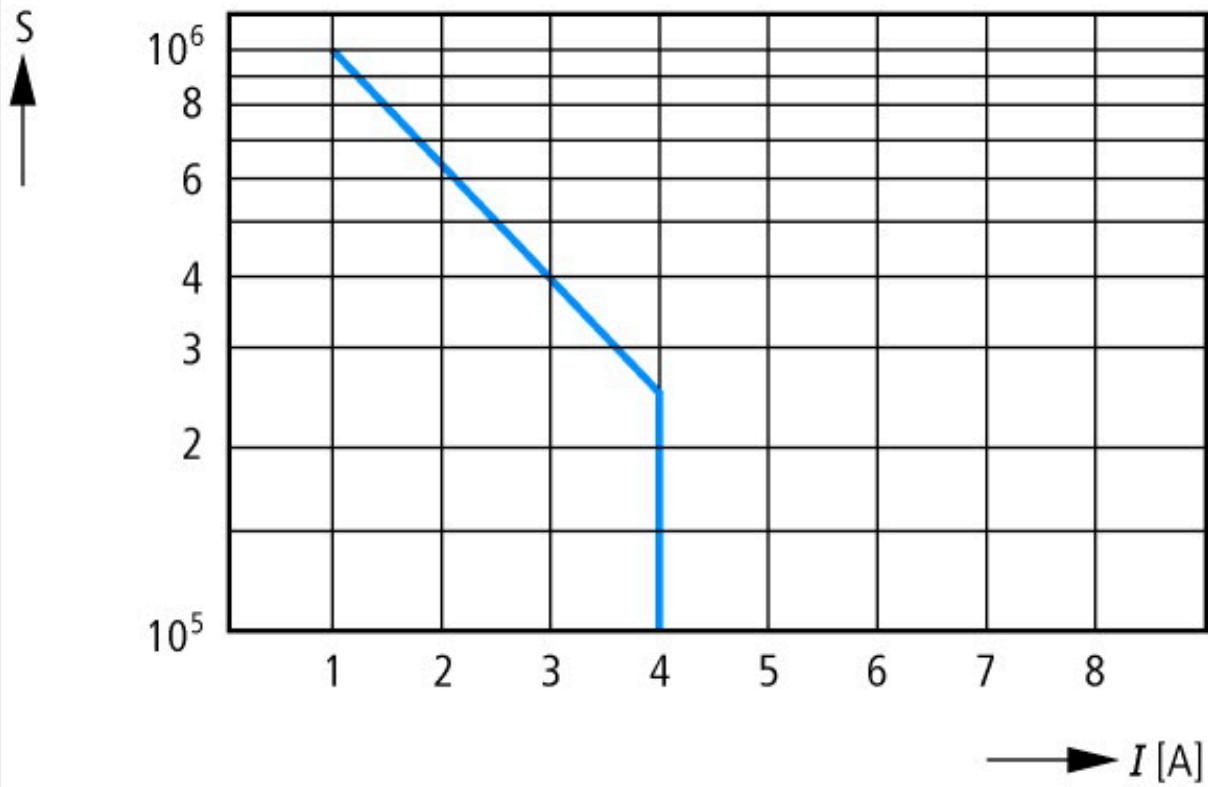

Contact life  
 S operations  
 220 V 50 Hz AC-1  
 360 operations/h

## Dimensions

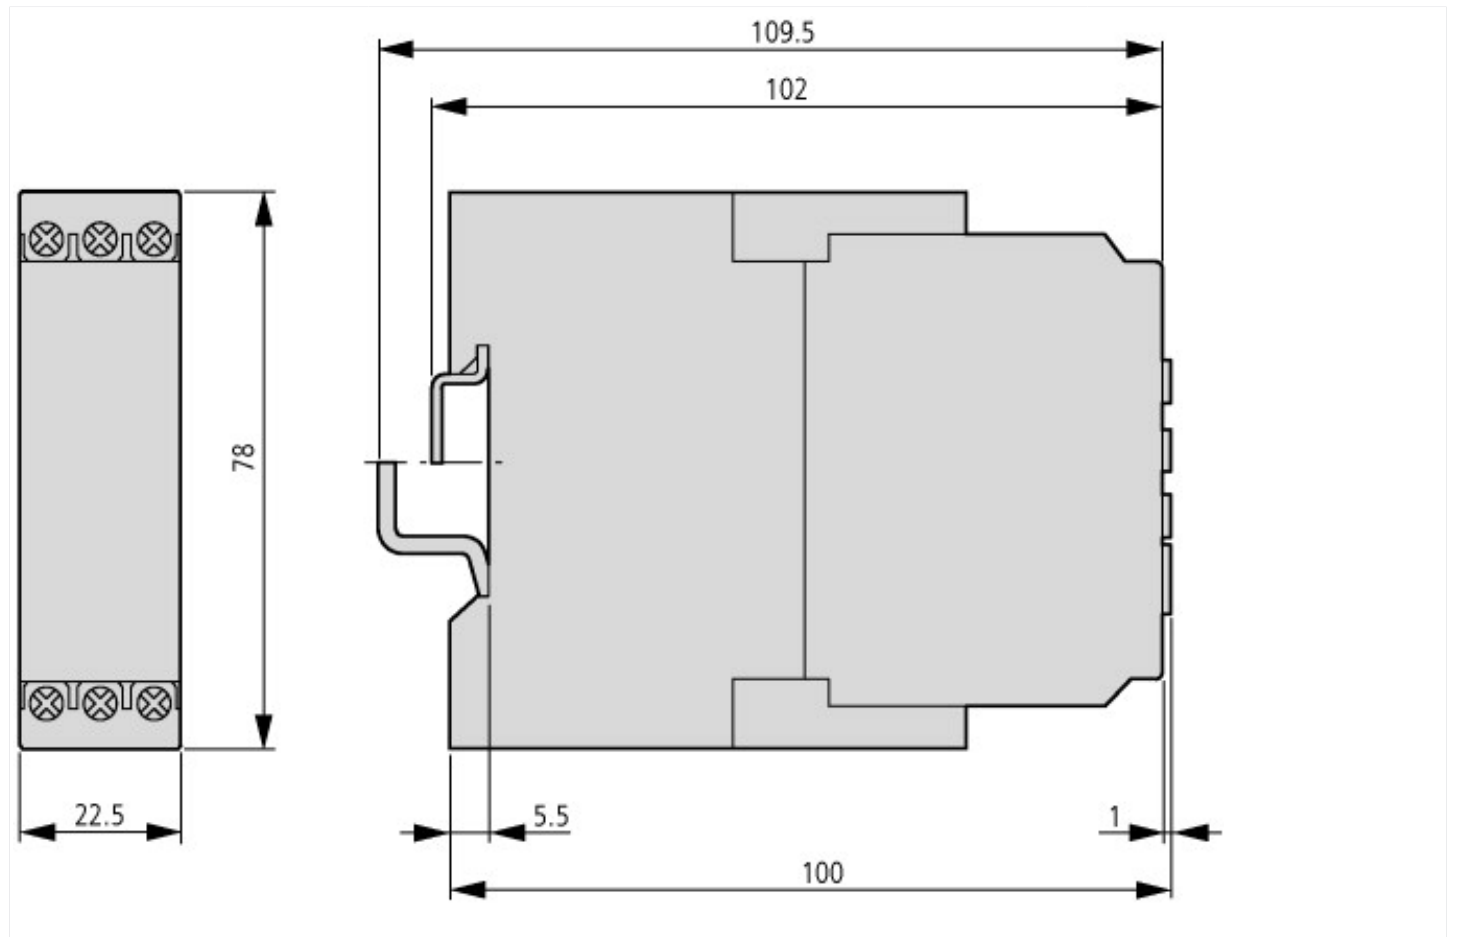

## Additional product information (links)

### IL04913003Z (AWA2432-2697) Liquid level monitoring relays

IL04913003Z (AWA2432-2697) Liquid level monitoring relays [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04913003Z2018\\_07.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04913003Z2018_07.pdf)

Level monitoring relays <http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=11.28>