



Busbar adapter, 55mm, 63A, 1TS

Part no. BBA4-63
Catalog No. 101457
Eaton Catalog No. BBA4-63
EL-Nummer 2465052
(Norway)

Delivery program

| | | | |
|---------------------------|-------|----------|---|
| Product range | | | 60 mm system |
| Product range | | | Accessories |
| Accessories | | | Busbar adapters |
| | | | Approved to UL 508 For fitting to flat Cu-busbars with 60 mm between busbar centres, suitable for 5 mm and 10 mm busbar thickness Rated operational current 63 A For motor-protective circuit-breakers |
| For use with | | | Busbar adapter PKZM4 |
| Rated operational voltage | U_e | V | 690 |
| Rated operational current | I_e | A | 63 |
| Terminal capacity | | | AWG 8 (10 mm ²) |
| Adapter width | | mm | 54 |
| Adapter length | | mm | 200 |
| DIN rail | | Quantity | 1 |
| Adapter width | | mm | 54 |
| For use with | | | PKZM4, PKE65 |

Design verification as per IEC/EN 61439

| | | | |
|--|------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 63 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 6.9 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | |
| | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | |
| | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | |
| | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | |
| | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | |
| | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | |
| | | | Does not apply, since the entire switchgear needs to be evaluated. |

| | | | |
|--|--|--|--|
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 6.0

| | | | |
|---|--|----|-----------------------------|
| Low-voltage industrial components (EG000017) / Busbar adapter (EC001531) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Busbar trunking system (LV circuitry) / Busbar adapter (low-voltage switching technology) (ecl@ss8.1-27-37-03-04 [ACN951008]) | | | |
| Mounting rail armament | | | 1 mounting rail |
| Type of electrical connection | | | Round conductor/copper band |
| Rated current I _n | | A | 63 |
| Min. busbar thickness | | mm | 5 |
| Max. busbar thickness | | mm | 10 |
| Width of the adapter | | mm | 54 |
| Rail width | | mm | 35 |
| Busbar distance | | mm | 60 |

Approvals

| | | | |
|--------------------------------------|--|--|---|
| Product Standards | | | UL 508A; CSA-C22.2 No. 14; IEC60439-1; CE marking |
| UL File No. | | | E300273 |
| UL Category Control No. | | | NMTR; NMTR7 |
| North America Certification | | | UL listed, certified by UL for use in Canada |
| Specially designed for North America | | | No |
| Max. Voltage Rating | | | 600 V AC |

Dimensions

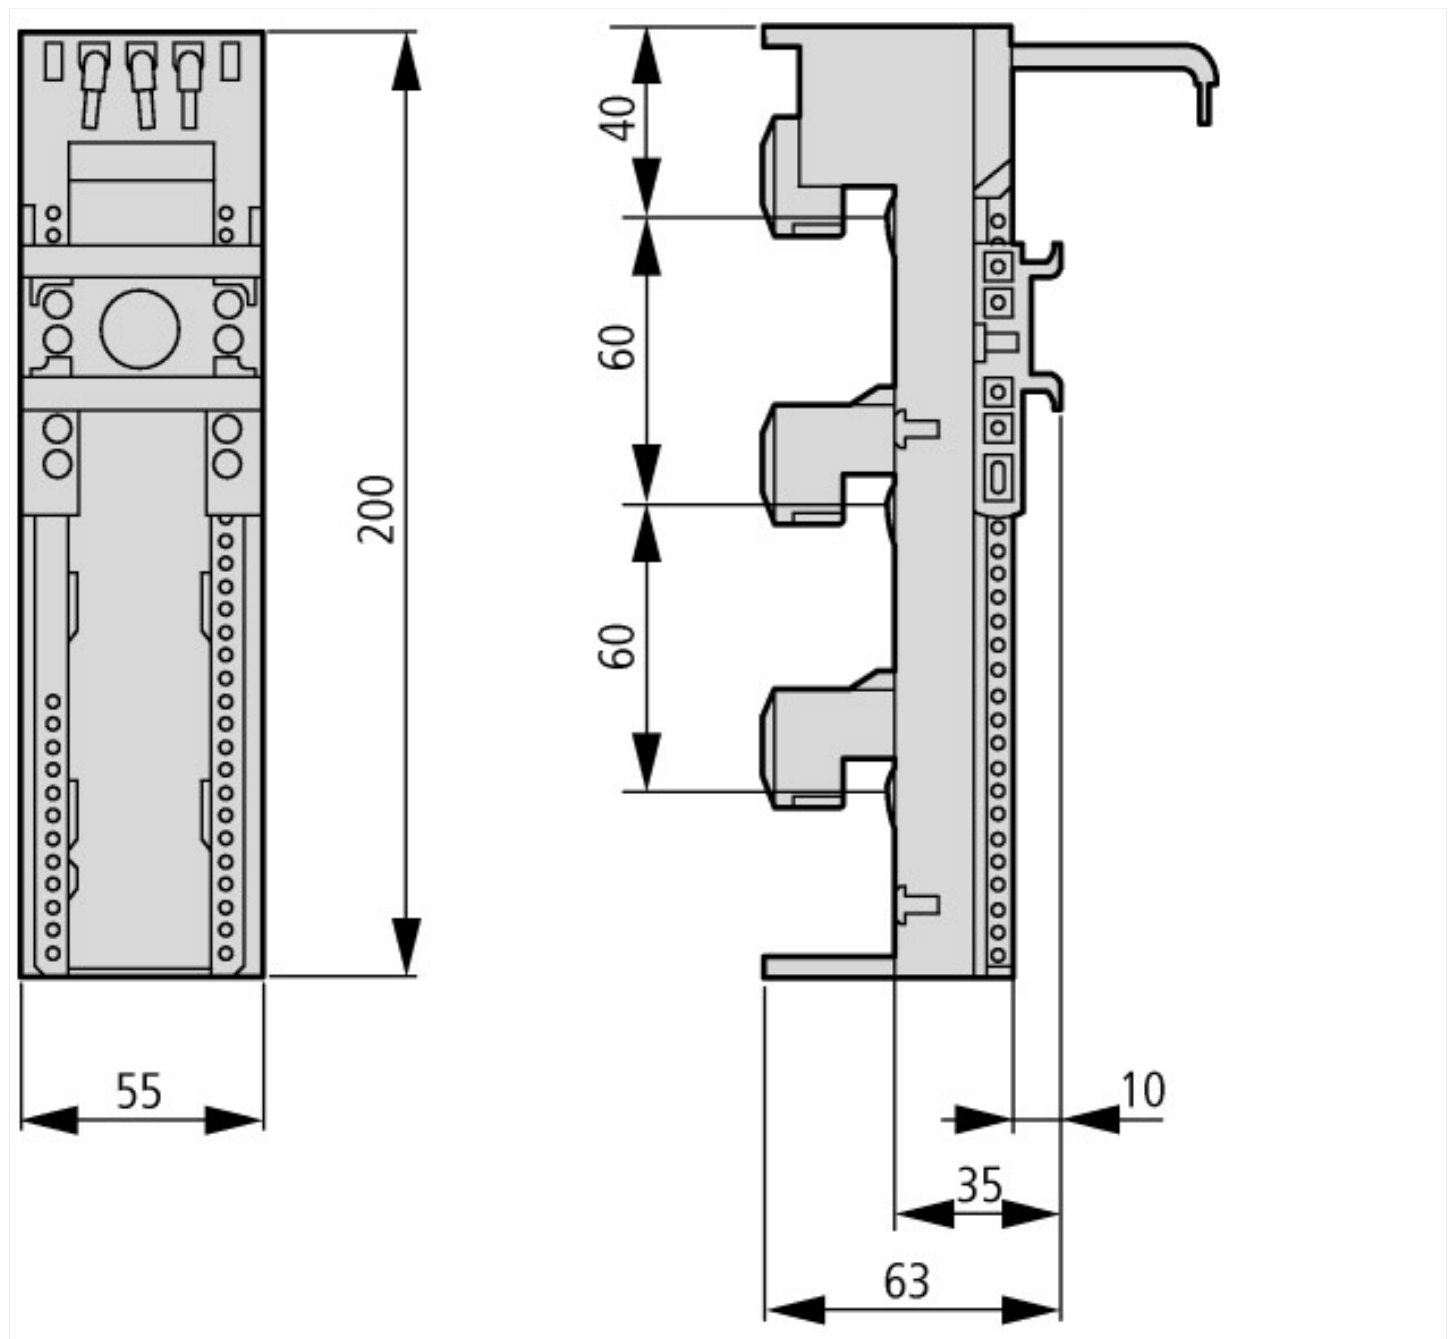

Additional product information (links)

IL03402015Z (AWA1210-2324) Busbar adapter

IL03402015Z (AWA1210-2324) Busbar adapter ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402015Z2018_05.pdf

Motor starters and "Special Purpose Ratings" for the North American market http://www.moeller.net/binary/ver_techpapers/ver953en.pdf

Busbar Component Adapters for modern Industrial control panels http://www.moeller.net/binary/ver_techpapers/ver960en.pdf