


I/O module with temperature measuring, range B, 6DI(2AI), 2I-Pt100, 4DO Trans

EATON
Powering Business Worldwide™

Part no. **MFD-TP12-PT-B**
Catalog No. **106043**

**EL-Nummer
(Norway)** **4519716**

Delivery program

Description	Configurable temperature range
Supply voltage	24 V DC
Inputs	
Digital	6
of which can be used as analog	2
Pt100, Pt1000, Ni1000	2
Outputs	
Transistor	4
Temperature range	
Temperature detector	-200...+200 °C 0...+850 °C
For use with	MFD-CP8... from device version 08 MFD-CP10..

Technical data

General		
Standards		EN 61000-6-1/-2/-3/-4, IEC 60068-2-6, IEC 60068-2-27
Dimensions (W x H x D)	mm	89 x 90 x 25 (installed)
Weight	kg	0.14
Mounting		Fitted into the power supply unit.

Terminal capacities

Solid	mm ²	0.2/4 (AWG 24 - 12)
Flexible with ferrule	mm ²	0.2/2.5 (AWG 24 - 12)
Standard screwdriver	mm	3.5 x 0.6

Climatic environmental conditions

Operating ambient temperature	°C	-25 to 55, cold as per IEC 60068-2-1, heat as per IEC 60068-2-2
Condensation		Take appropriate measures to prevent condensation
Storage	°C	-40 - 70
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	5 - 95
Air pressure (operation)	hPa	795 - 1080

Ambient conditions, mechanical

Pollution degree		2
Protection type (IEC/EN 60529, EN50178, VBG 4)		IP20
Vibrations (IEC/EN 60068-2-6)	Hz	
Constant amplitude 0.15 mm	Hz	10 - 57
Constant acceleration 2 g	Hz	57 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms	Impacts	18
Drop to IEC/EN 60068-2-31	Drop height	mm
Free fall, packaged (IEC/EN 60068-2-32)	m	1
Mounting position		Vertical or horizontal

Electromagnetic compatibility (EMC)

Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)	kV	
Air discharge	kV	8
Contact discharge	kV	6
Electromagnetic fields (RFI) to IEC EN 61000-4-3	V/m	10
Radio interference suppression		EN 55011 Class B, EN 55022 Class B

Burst Impulse (IEC/EN 61000-4-4, Level 3)

Supply cable	kV	2
Signal lines	kV	2
Power pulses (surge) (IEC/EN 61000-4-5)	kV	2 (supply cables, symmetrical)
power pulses (surge) (IEC/EN 61000-4-5, level 2)	kV	0.5 (supply cables, symmetrical)
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10

Insulation resistance

Clearance in air and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142
Insulation resistance		EN 50178

Power supply

Heat dissipation	W	2
------------------	---	---

Digital inputs 24 V DC

Number		6
Inputs can be used as analog inputs		2 (I11, I12)
Potential isolation		
From power supply		No
Between digital inputs		No
From the outputs		Yes
to PC interface, memory card, easyNet, easyLink		Yes
Rated operational voltage	U _e	V DC 24
On 0 signal	U _e	V DC < 5.0 (I1 - I4) < 8.0 (I11, I12)
On 1 signal	U _e	V DC > 15.0 (I1 - I4) > 8.0 (I11, I12)
Input current on 1 signal		
I11, I12	mA	2.2 (at 24 V DC)
Delay time from 0 to 1		ms
Debounce ON		ms 20
Debounce OFF		ms Normally 0.1 (I1 - I4), Normally 0.25 (I11 - I12)
Delay time from 1 to 0		ms
Debounce ON		ms 20
Debounce OFF		ms Normally 0.1 (I1 - I4), normally 0.2 (I11, I12)
Cable length (unscreened)	m	100
Frequency counter		
Quantity		4 (I1, I2, I3, I4)
Counter frequency	kHz	< 3
Pulse shape		Square
Incremental counter		
Quantity		2 (I1 + I2, I3 + I4)
Counter frequency	kHz	≤ 3
Pulse shape		Square
Signal offset		90°
Rapid counter inputs		
Number		4 (I1, I2, I3, I4)
Counter frequency	kHz	< 3
Pulse shape		Square
Cable length, screened	m	< 20

Analog inputs

Potential isolation		
From power supply		No
From the digital inputs		No
From the outputs		Yes
From the PC interface, memory card NET network, EASY-Link		Yes
Input type		DC voltage
Signal range	V DC	0 - 10
Resolution, analog	V	0.01
Resolution, digital	V	0.01
Resolution	Bit	10 (value 0 - 1023)

Input impedance	kΩ	11.2
Accuracy of actual value two MFD devices	%	± 3
Within a single device	%	± 2
Conversion time, analog/digital	ms	Each CPU cycle
Input current	mA	< 1
Cable length screened	m	< 30

Analog inputs temperature resistance Pt100 or Ni1000 sensors

Number		2 x Pt 100 or 2 x Ni1000 (according to part no.)
Input type resistance sensor		Platinum sensor Pt100 according to DIN EN 60751, IEC 751: MFD-TP12-PT... Nickel sensor Ni1000 according to DIN 43760: MFD-TP12-NI...
Temperature range	°C, (°F)	Pt100, area A, selectable: -40 — +90, (-40 — +194); 0 — +250 (+32 — +482); 0 — +400, (+32 — +752) Ni1000, area A, selectable: -40 — +90, (-40 — +194); 0 — +250 (+32 — +482) Pt100, area B: -0 — +850, (+32 — +1562); -200 — +200 (-328 — +392)
Potential isolation		
From power supply		No
From the digital inputs		No
From the outputs		Yes
to PC interface, memory card, easyNet, easyLink		Yes
Resolution digital, scaling per sensor		With operands "IA" and "MD", selectable under scaling: 12 (0- 4095) Bit With operand "MD", selectable under scaling: 1, 0.1 °C (1, 0.1 °F)
Measurement value resolution analog/digital	Bit	Depending upon the scaling
Measuring current	mA	< 1.6
Damage limit (in the case of a wiring error)		Apply external voltage
Measuring principle		Two or three wire per sensor, selectable by connection of sensor
Accuracy (without electromagnetic compatibility interference)	%	Two MFD devices between each other: Typically 1; max. 1.6 (Pt), 1.2 (Ni) Pt100 sensor (offset error, linearity error, repetition accuracy, temperature error of device included): ± 0.8 of measuring range Ni1000 sensor (offset error, linearity error, repetition accuracy, temperature error of device included): ± 0.8 of measuring range
Conversion time, analog/digital	ms	without sampling time setting, selectable per sensor: 200 with sampling time (adjustable), selectable per sensor: 200 - 65535
additional measurement aids		Filtering (software), smoothing of analog input signal (PT1 behavior), only with set sampling time, selectable per sensor: yes Filter for the suppression of certain frequencies and their multiples: 50, 60, 250, 500 Hz
Diagnostics		Card diagnostic: yes Wire break diagnostic per sensor: yes Wire break diagnostic per sensor: yes below lower measurement range: yes Upper sensor measuring range exceeded: yes
Cable length screened	m	< 10

Relay outputs

Potential isolation		
From power supply		Yes

Transistor outputs

Number			4
Rated operational voltage	U _e	V DC	24
Admissible range	U _e	V DC	20.4 - 28.8
Supply current			
On 0 signal		Normally/max. mA	18/32
On 1 signal		Normally/max. mA	24 /44
Protection against polarity reversal			yes (Caution: A short circuit will result if 0 V or earth is applied to the outputs in the event that the supply voltage is connected to the wrong poles.)
Potential isolation			
Potential isolation of the power supply, inputs			Yes
From the inputs			Yes
to PC interface, memory card, easyNet, easyLink			Yes
Rated operational current at signal „1” DC per channel	I _e	A	max. 0.5
Lamp load without R _v per channel		W	5 (Q1 - Q4)
Residual current on 0 signal per channel		mA	< 0.1
Max. output voltage			

On 0 signal with external load < 10 MΩ	V	2.5
On 1 signal with $I_e = 0.5 \text{ A}$	V	$U = U_e - 1 \text{ V}$
Short-circuit protection		Thermal (Q1 - Q4), (evaluation with diagnostics input I16)
Short-circuit tripping current for $R_a \leq 10 \text{ mΩ}$	A	$0.7 \leq I_e \leq 2 \text{ per output}$
Total short-circuit current	A	8
Peak short-circuit current	A	16
Thermal cutout		Yes
Max. operating frequency with constant resistive load	Operations/h	40000
Parallel connection of outputs		Group 1: Q1 to Q4
With resistive load, inductive load with external suppressor circuit, combination within a group	max.	4
Number of outputs		A
Total max. current		2 (Caution! Outputs must be switched simultaneously and for the same period.)
Inductive load to EN 60947-5-1		
Without external suppressor circuit		
$T_{0.95} = 1 \text{ ms}, R = 48 \Omega, L = 16 \text{ mH}$		
Utilization factor	g	0.25
Duty factor	% DF	100
Max. switching frequency $f = 0.5 \text{ Hz}$ (max. DF = 50 %)	Operations/h	500
DC-13, $T_{0.95} = 72 \text{ ms}, R = 48 \Omega, L = 1.15 \text{ H}$		
Utilization factor	g	0.25
Duty factor	% DF	100
Max. switching frequency $f = 0.5 \text{ Hz}$ (max. DF = 50 %)	Operations/h	500
$T_{0.95} = 15 \text{ ms}, R = 48 \Omega, L = 0.24 \text{ H}$		
Utilization factor	g	0.25
Duty factor	% DF	100
Max. switching frequency $f = 0.5 \text{ Hz}$ (max. DF = 50 %)	Operations/h	500
With external suppressor circuit		
Utilization factor	g	1
Duty factor	% DF	100
Max. switching frequency, max. duty factor	Operations/h	Depending on the suppressor circuit

Analog outputs

Potential isolation		
From power supply		No
From the digital inputs		No

Point-to-point connection

Potential isolation		
From power supply		Yes

Design verification as per IEC/EN 61439

Technical data for design verification		
Rated operational current for specified heat dissipation	I_n	A 0
Heat dissipation per pole, current-dependent	P_{vid}	W 0
Equipment heat dissipation, current-dependent	P_{vid}	W 0
Static heat dissipation, non-current-dependent	P_{vs}	W 2
Heat dissipation capacity	P_{diss}	W 0
Operating ambient temperature min.		°C -25
Operating ambient temperature max.		°C 55
IEC/EN 61439 design verification		
10.2 Strength of materials and parts		
10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.

10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Meets the product standard's requirements.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

PLC's (EG000024) / PLC analogue I/O-module (EC001420)

Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / SPS analog input/output module (ecl@ss10.0.1-27-24-22-01 [AKE524014])


Number of analogue inputs		2
Number of analogue outputs		0
Analogue inputs configurable		No
Analogue outputs configurable		No
Input, current		No
Input, voltage		Yes
Input, resistor		No
Input, resistance thermometer		Yes
Input, thermocouple		No
Input signal, configurable		Yes
Resolution of the analogue inputs	Bit	12
Output, current		No
Output, voltage		No
Output signal configurable		No
Resolution of the analogue outputs	Bit	0
Type of electric connection		Spring clamp connection
Suitable for safety functions		No
Category according to EN 954-1		
SIL according to IEC 61508		None
Performance level acc. EN ISO 13849-1		None
Appendant operation agent (Ex ia)		No
Appendant operation agent (Ex ib)		No
Explosion safety category for gas		None
Explosion safety category for dust		None
Width	mm	90
Height	mm	25
Depth	mm	89

Approvals

Product Standards	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking
UL File No.	E135462

UL Category Control No.	NRAQ
CSA File No.	012528
CSA Class No.	2252-01 + 2258-02
North America Certification	UL listed, CSA certified
Degree of Protection	IEC: IP20, UL/CSA Type: -

Dimensions

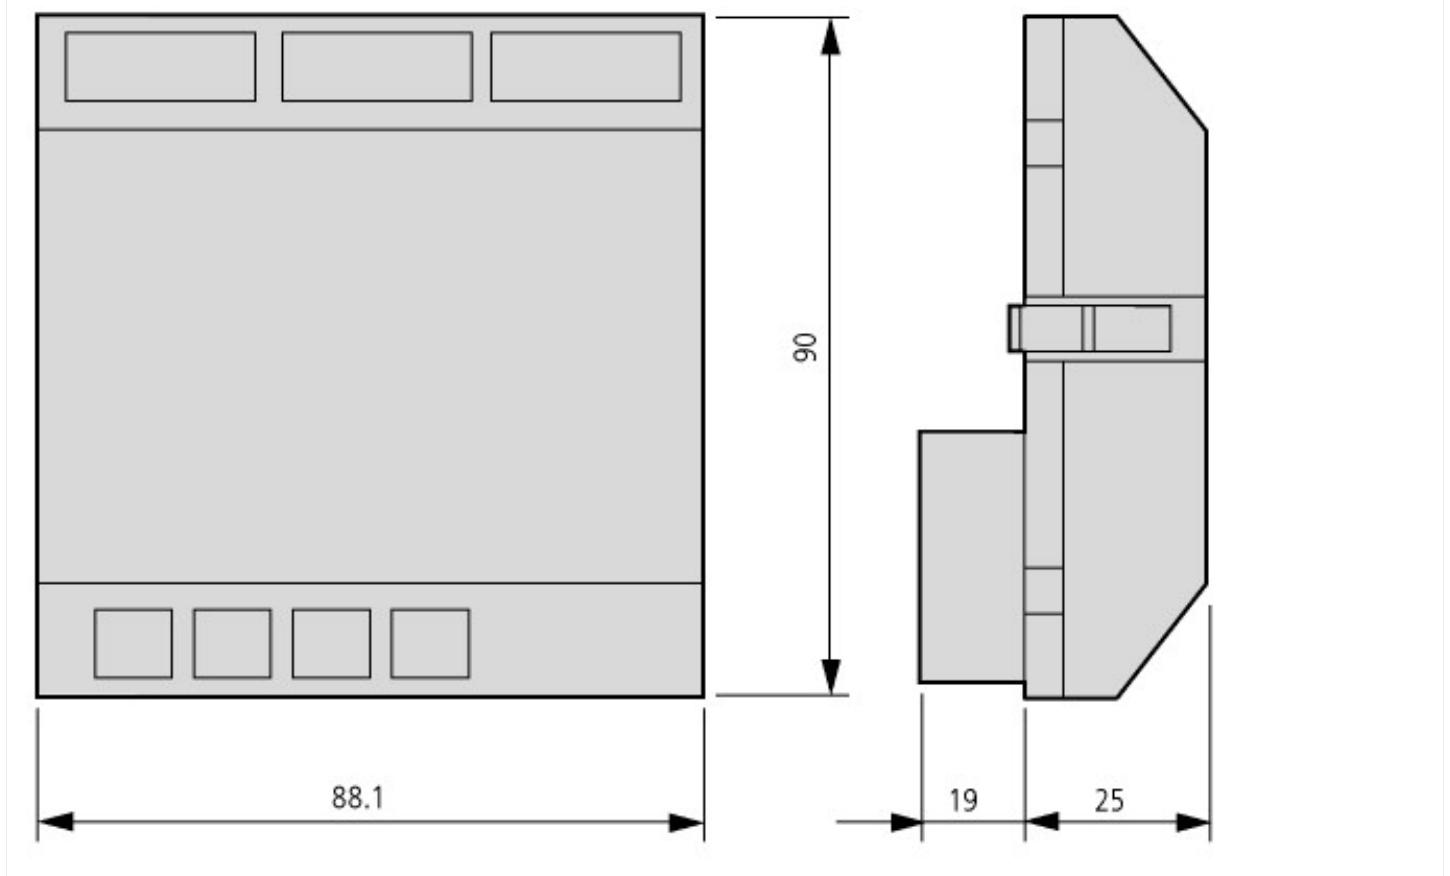

Assets (links)

Declaration of CE Conformity

00002594

Instruction Leaflets

IL05013020Z2018_02

Manuals

MN05002001Z_EN (English)

Additional product information (links)

Instruction leaflet "MFD-Titan temperature module" IL05013020Z (AWA2528-2339)

Instruction leaflet "MFD-Titan temperature module" IL05013020Z (AWA2528-2339) ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013020Z2018_02.pdf

Manual "MFD-Titan multi-function display" MN05002001Z (AWB2528-1480)

Handbuch „Multifunktions-Display MFD-Titan“ MN05002001Z (AWB2528-1480) - Deutsch ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_DE.pdf

Manual "MFD-Titan multi-function display" MN05002001Z (AWB2528-1480) - English ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05002001Z_EN.pdf

f1=1454&f2=1179;Labeleditor <http://applications.eaton.eu/sdIc?LX=11&>