






Circuit-breaker, 3p, 125A, plug-in module

Part no. **NZMC2-A125-SVE**  
 Catalog No. **113219**

Similar to illustration


## Delivery program

|   |                          |    |                  |
|---|--------------------------|----|------------------|
| Standard/Approval   |                          |    | IEC              |
| Installation type   |                          |    | Plug-in units    |
| Standard equipment  |                          |    | Screw connection |
| <b>Switching capacity</b>   |                          |    |                  |
| 400/415 V 50 Hz   | $I_{cu}$                 | kA | 36               |
| <b>Rated current = rated uninterrupted current</b>                                  |                          |    |                  |
| Rated current = rated uninterrupted current   | $I_n = I_u$              | A  | 125              |
| <b>Setting range</b>  |                          |    |                  |
| Overload trip   |                          |    |                  |
|    | $I_r$                    | A  | 100 - 125        |
| Short-circuit releases  |                          |    |                  |
|  |                          |    |                  |
| Non-delayed   | $I_i = I_n \times \dots$ |    | 6 - 10           |
|  |                          |    |                  |

## Technical data

### General

|   |  |      |  |
|---|--|------|--|
| Standards   |  |      | IEC/EN 60947   |
| Protection against direct contact   |  |      | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing   |  |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature   |  |      |  |
| Ambient temperature, storage  |  | °C   | - 40 - + 70  |
| Operation   |  | °C   | -25 - +70  |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 |  | g    | 20 (half-sinusoidal shock 20 ms)   |
| Safe isolation to EN 61140  |  |      |  |
| Between auxiliary contacts and main contacts  |  | V AC | 500  |
| between the auxiliary contacts  |  | V AC | 300  |
| Weight  |  | kg   | 2.345  |
| Mounting position   |  |      | Vertical and 90° in all directions   |



With XFI earth-fault release:

- NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit
- NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit:
- NZM3, N3: vertical, 90° right/left
- NZM4, N4: vertical with remote operator:
- NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

|  |  |  |  |
|--|--|--|--|
| Direction of incoming supply           |  |  | as required  |
| Degree of protection                   |  |  |  |
| Device                                 |  |  | In the operating controls area: IP20 (basic degree of protection)        |
| Enclosures                             |  |  | With insulating surround: IP40<br>With door coupling rotary handle: IP66 |
| Terminations                           |  |  | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00         |
| Other technical data (sheet catalogue) |  |  | Weight<br>Temperature dependency, Derating<br>Effective power loss       |

### Circuit-breakers

|   |             |      |       |
|---|-------------|------|-------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 125   |
| Rated surge voltage invariability           | $U_{imp}$   |      |       |
| Main contacts                               |             | V    | 8000  |
| Auxiliary contacts                          |             | V    | 6000  |
| Rated operational voltage                   | $U_e$       | V AC | 690   |
| Overvoltage category/pollution degree       |             |      | III/3 |
| Rated insulation voltage                    | $U_i$       | V    | 690   |
| Use in unearthed supply systems             |             | V    | ≤ 690 |

### Switching capacity

|   |            |       |   |
|---|------------|-------|---|
| Rated short-circuit making capacity   | $I_{cm}$   |       |   |
| 240 V   | $I_{cm}$   | kA    | 121   |
| 400/415 V   | $I_{cm}$   | kA    | 76  |
| 440 V 50/60 Hz  | $I_{cm}$   | kA    | 63  |
| 525 V 50/60 Hz  | $I_{cm}$   | kA    | 24  |
| 690 V 50/60 H   | $I_c$      | kA    | 14  |
| Rated short-circuit breaking capacity $I_{cn}$                              | $I_{cn}$   |       |   |
| $I_{cu}$ to IEC/EN 60947 test cycle O-t-CO                                  | $I_{cu}$   | kA    |   |
| 240 V 50/60 Hz  | $I_{cu}$   | kA    | 55  |
| 400/415 V 50/60 Hz  | $I_{cu}$   | kA    | 36  |
| 440 V 50/60 Hz  | $I_{cu}$   | kA    | 30  |
| 525 V 50/60 Hz  | $I_{cu}$   | kA    | 12  |
| 690 V 50/60 Hz  | $I_{cu}$   | kA    | 8   |
| $I_{cs}$ to IEC/EN 60947 test cycle O-t-CO-t-CO                             | $I_{cs}$   | kA    |   |
| 240 V 50/60 Hz  | $I_{cs}$   | kA    | 55  |
| 400/415 V 50/60 Hz  | $I_{cs}$   | kA    | 36  |
| 440 V 50/60 Hz  | $I_{cs}$   | kA    | 22.5  |
| 525 V 50/60 Hz  | $I_{cs}$   | kA    | 6   |
| 690 V 50/60 Hz  | $I_{cs}$   | kA    | 4   |
|   |            |       | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| Utilization category to IEC/EN 60947-2                                      |            |       | A   |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations |       | 20000   |
| Lifespan, electrical  |            |       |   |
| AC-1  |            |       |   |
| 400 V 50/60 Hz  | Operations |       | 10000   |
| 415 V 50/60 Hz  | Operations |       | 7500  |
| 690 V 50/60 Hz  | Operations |       | 7500  |
| AC--3   |            |       |   |
| 415 V 50/60 Hz  | Operations |       | 6500  |
| Max. operating frequency  |            | Ops/h | 120   |
| Total break time at short-circuit   |            | ms    | < 10  |

### Terminal capacity

|                        |  |  |                  |
|------------------------|--|--|------------------|
| Standard equipment     |  |  | Screw connection |
| Round copper conductor |  |  |                  |
| Tunnel terminal        |  |  |                  |

|  |    |                 |        |
|--|----|-----------------|--------|
| Solid                                  |    | mm <sup>2</sup> | 1 x 16 |
| Copper busbar (width x thickness)      | mm |                 |        |
| Bolt terminal and rear-side connection |    |                 |        |
| Screw connection                       |    |                 | M8     |

## Design verification as per IEC/EN 61439


|  |                  |    |  |
|--|------------------|----|--|
| Technical data for design verification   |                  |    |  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 27.61  |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |    |  |
| 10.9.2 Power-frequency electric strength   |                  |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0


|  |  |    |                                   |
|--|--|----|-----------------------------------|
| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)  |  |    |                                   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ec@ss10.0.1-27-37-04-09 [AJZ716013]) |  |    |                                   |
| Rated permanent current I <sub>u</sub>   |  | A  | 125                               |
| Rated voltage  |  | V  | 690 - 690                         |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz  |  | kA | 36                                |
| Overload release current setting   |  | A  | 100 - 125                         |
| Adjustment range short-term delayed short-circuit release  |  | A  | 0 - 0                             |
| Adjustment range undelayed short-circuit release   |  | A  | 750 - 1250                        |
| Integrated earth fault protection  |  |    | No                                |
| Type of electrical connection of main circuit  |  |    | Screw connection                  |
| Device construction  |  |    | Built-in device plug-in technique |
| Suitable for DIN rail (top hat rail) mounting  |  |    | No                                |
| DIN rail (top hat rail) mounting optional  |  |    | Yes                               |
| Number of auxiliary contacts as normally closed contact  |  |    | 0                                 |
| Number of auxiliary contacts as normally open contact  |  |    | 0                                 |

|   |  |              |
|---|--|--------------|
| Number of auxiliary contacts as change-over contact |  | 0            |
| With switched-off indicator                         |  | No           |
| With under voltage release                          |  | No           |
| Number of poles                                     |  | 3            |
| Position of connection for main current circuit     |  | Front side   |
| Type of control element                             |  | Rocker lever |
| Complete device with protection unit                |  | Yes          |
| Motor drive integrated                              |  | No           |
| Motor drive optional                                |  | Yes          |
| Degree of protection (IP)                           |  | IP20         |

## Characteristics

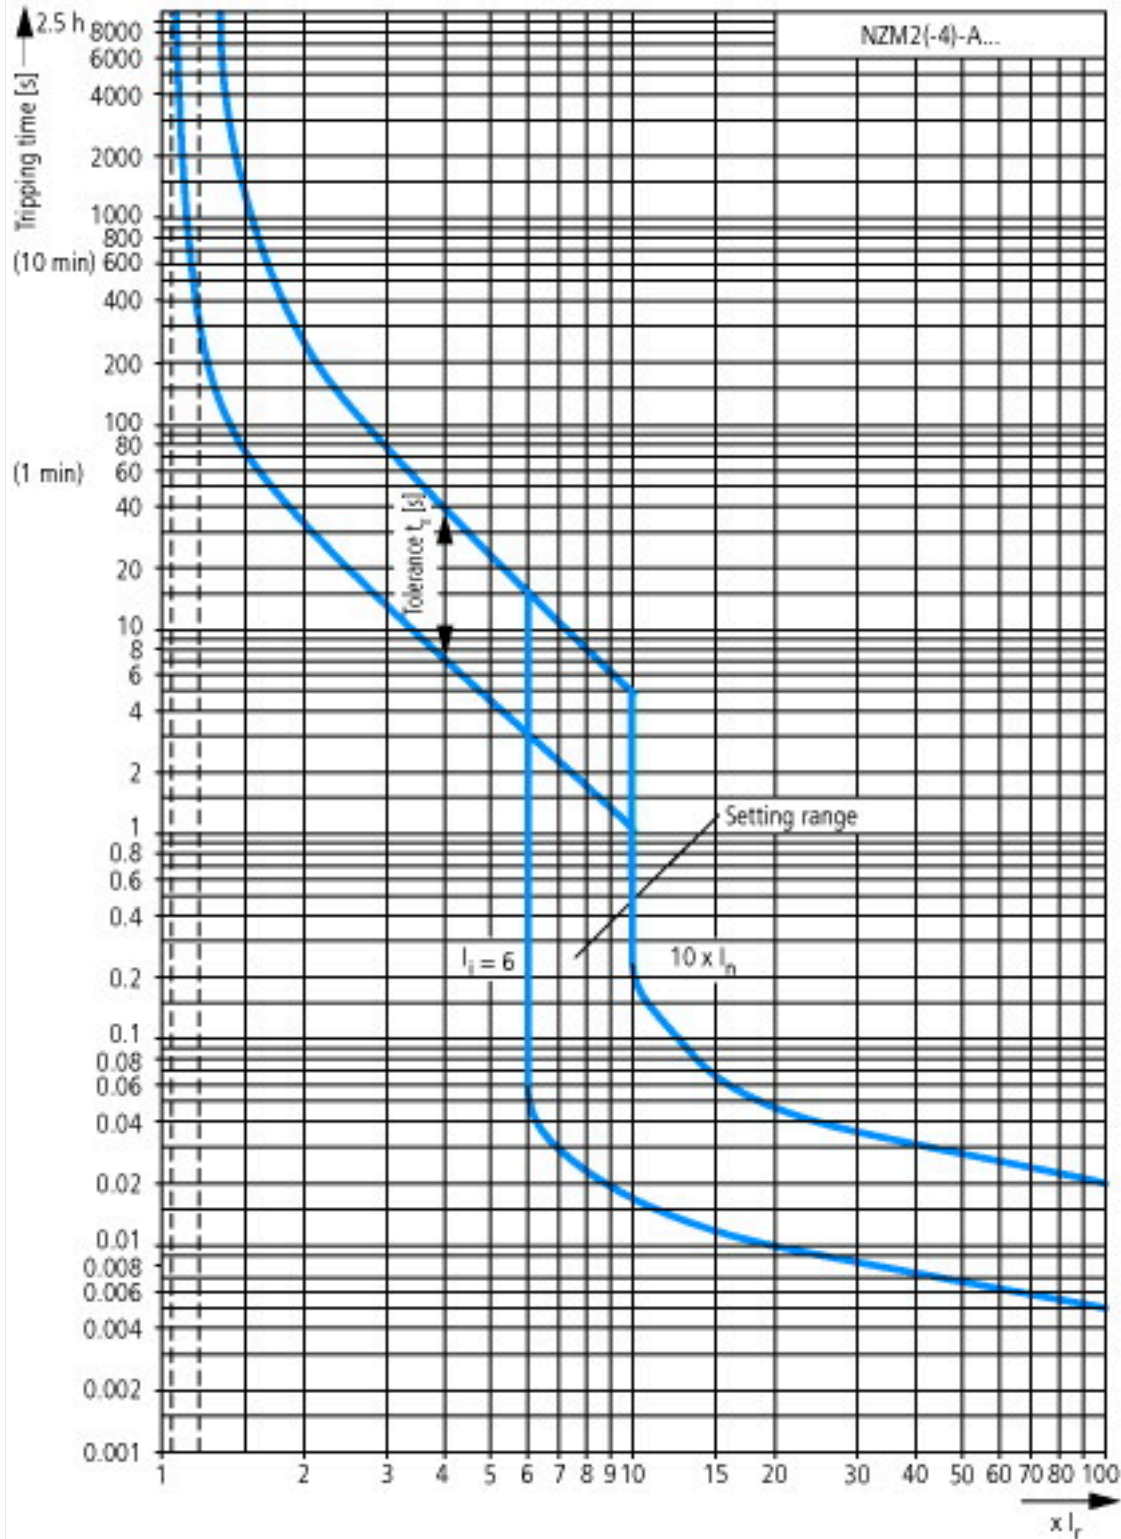

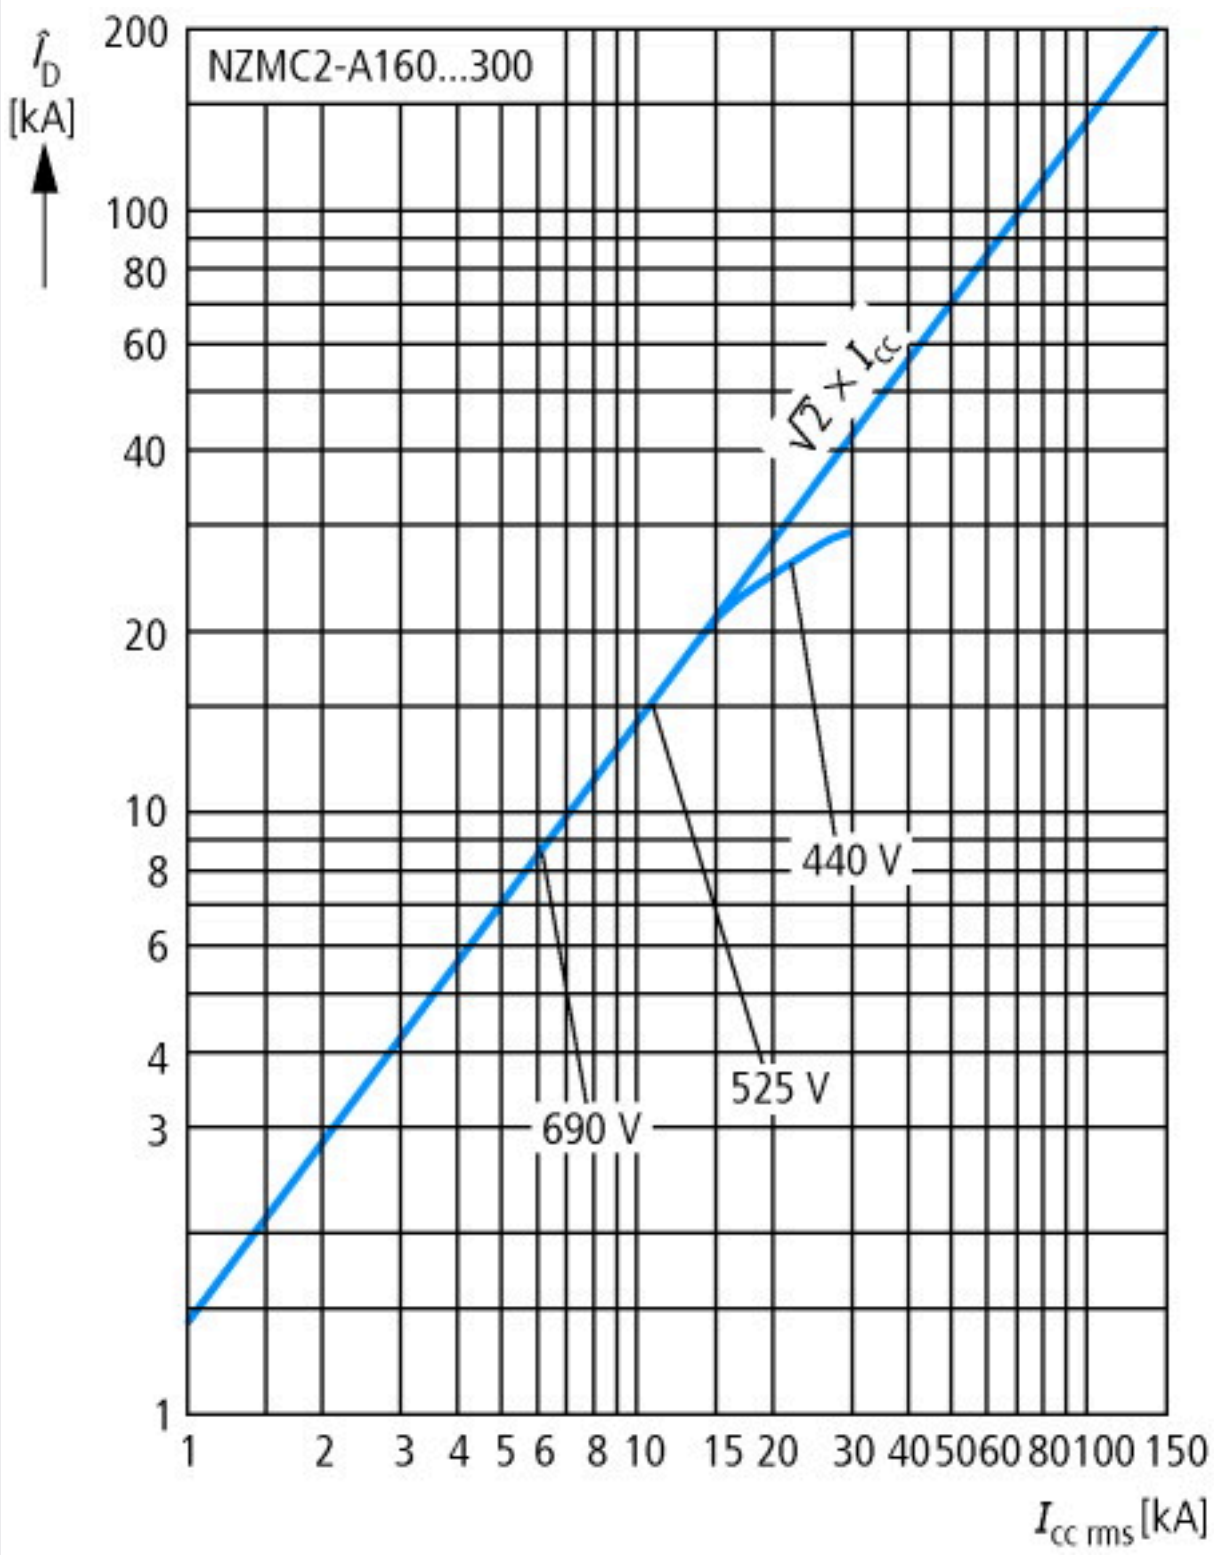

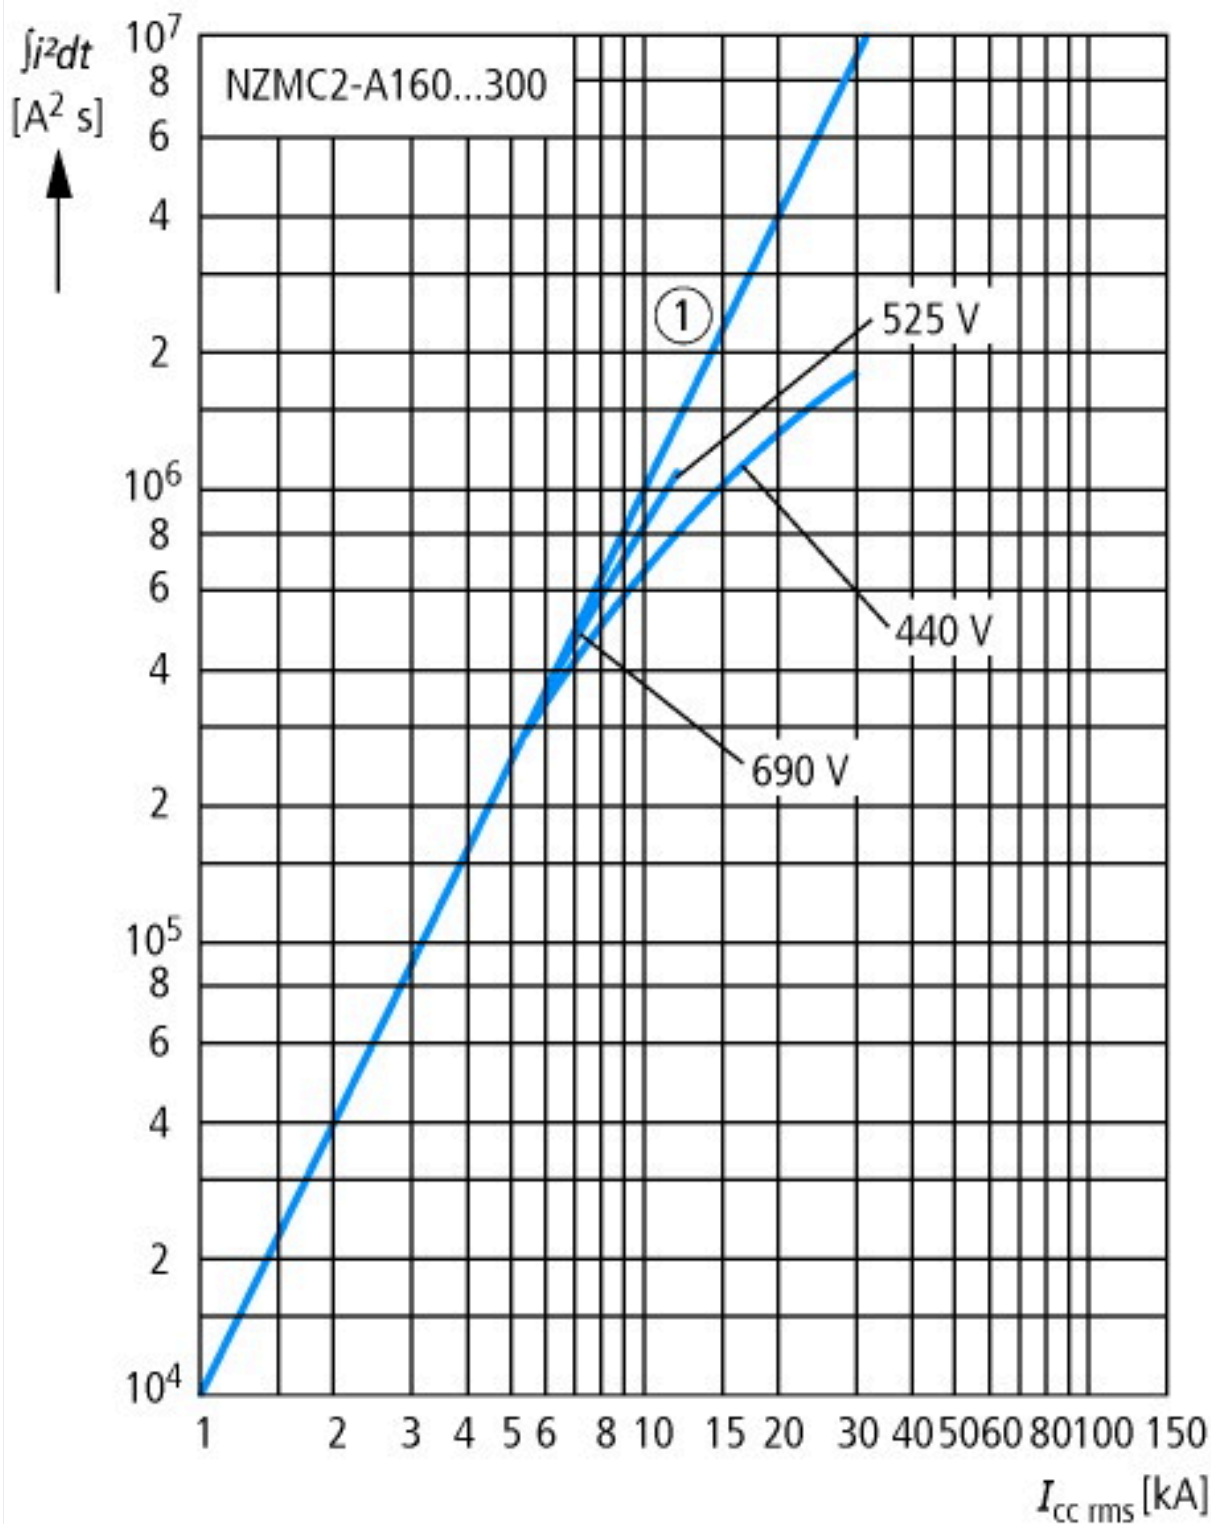

### Additional product information (links)

|   |   |
|---|---|
| Weight  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.171</a> |
| Temperature dependency, Derating                      | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a> |
| Effective power loss                                  | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.174</a> |
| additional technical information for NZM power switch | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_techinc_de_en.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/nzm_techinc_de_en.pdf</a>               |