



Compact PLC, 24 V DC, ethernet, RS232, SWDT



Part no. XC-152-E3-11
Catalog No. 167850
Alternate Catalog No. XC-152-E3-11
EL-Nummer (Norway) 0004560867


Similar to illustration

Delivery program

Product range			SmartWire-DT coordinators
Function			With SmartWire-DT master interface Additional field bus interfaces Ethernet Web-server OPC Server Remote Server
Operating system			Windows CE 5.0 (licence incl.)
PLC-licence			CoDeSys Runtime (licence inclusive)
Integrated Web server			yes
Built-in interfaces			1 x Ethernet 10/100 Mbps 1 x USB device 2.0 1 x USB host 2.0 1 x RS232 1 x SmartWire-DT
Slots			for SD card: 1
Memory			
Application/marker/retain data			64 MB/4 KB/32 KB

Technical data

General

Standards			EN 61131, UL 508
Approvals			
Approvals			CE, cULus EAC
shipping classification			DNV GL
			
Ambient temperature		°C	0 - +55
Storage	θ	°C	-20 - +60
Degree of Protection			IP20
Battery (service life)			non-replaceable, BR2330 soldered in
Weight		kg	0.47

Power supply

Supply voltage		V DC	24
Permissible range	U_e		20.4 - 28.8 V DC
Maximum power loss	P_v	W	8.5
Note on heat dissipation			Heat dissipation with power consumption for 24 V 6 W for basic device + 2.5 W for USB module

CPU

Processor			RISC CPU, 32 Bit, 400 MHz
-----------	--	--	---------------------------

Memory

Program code/program data			64MB
Cycle time for 1 k of instructions (Bit, Byte)		ms	Normally 0.04

Interfaces

Basic interfaces			
------------------	--	--	--

Ethernet			
Profile			FTP SMTP HTTP TCP UDP IP
Data transfer rate		MBit/s	100Base-TX 10Base-T
Potential isolation			500 V _{r.m.s.}
Programming interface			yes
Connections			RJ45
USB			
USB Host			USB 2.0
Potential isolation			None
USB device			USB 2.0
Potential isolation			None
additional interfaces			
PROFIBUS			
			–
CAN			
			–
SmartWire-DT			✓
Profile			SmartWire-DT
Data transfer rate		kbit/s	max. 250
Potential isolation			None
Module		Count	99
Connections			Blade terminal SWD4-8MF2
RS485			✓
Connections			9-pin D-sub (plug)
RS232			✓
Data transfer rate		kbit/s	max. 57.6
Potential isolation			None
Connections			9-pin D-sub (plug)
RTC (real-time clock)			yes

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	0
Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	0
Static heat dissipation, non-current-dependent	P _{vs}	W	6
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	0
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Meets the product standard's requirements.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 7.0

PLC's (EG000024) / PLC device set (EC002581)			
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / PLC device set (ecl@ss10.0.1-27-24-22-19 [BAA707013])			
Contains function building blocks			Yes
Contains basic device			Yes
Contains module rack			No
Contains power supply			Yes
Contains analogue input module			No
Contains analogue output module			No
Contains digital input module			No
Contains digital output module			No
Contains function module			Yes
Contains technology module			Yes
Contains communication module			Yes
Contains memory unit			Yes
Contains simulation module			No
Contains connection cable			No
Contains control unit			No
Contains monitor			No
Contains programming software			No
Contains engineering software			Yes
Contains visualization			Yes
Contains libraries			Yes
Contains documentation			Yes
Contains other components			Yes
Software preinstalled			No

Approvals

Product Standards			UL508, cULus; IEC/EN 61131-2, CE
UL File No.			E205091
UL Category Control No.			NRAQ
CSA File No.			UL report applies to US and Canada
CSA Class No.			-
North America Certification			UL listed, certified by UL for use in Canada
Degree of Protection			IEC:IP20, UL/CSA Tape: open type

Dimensions

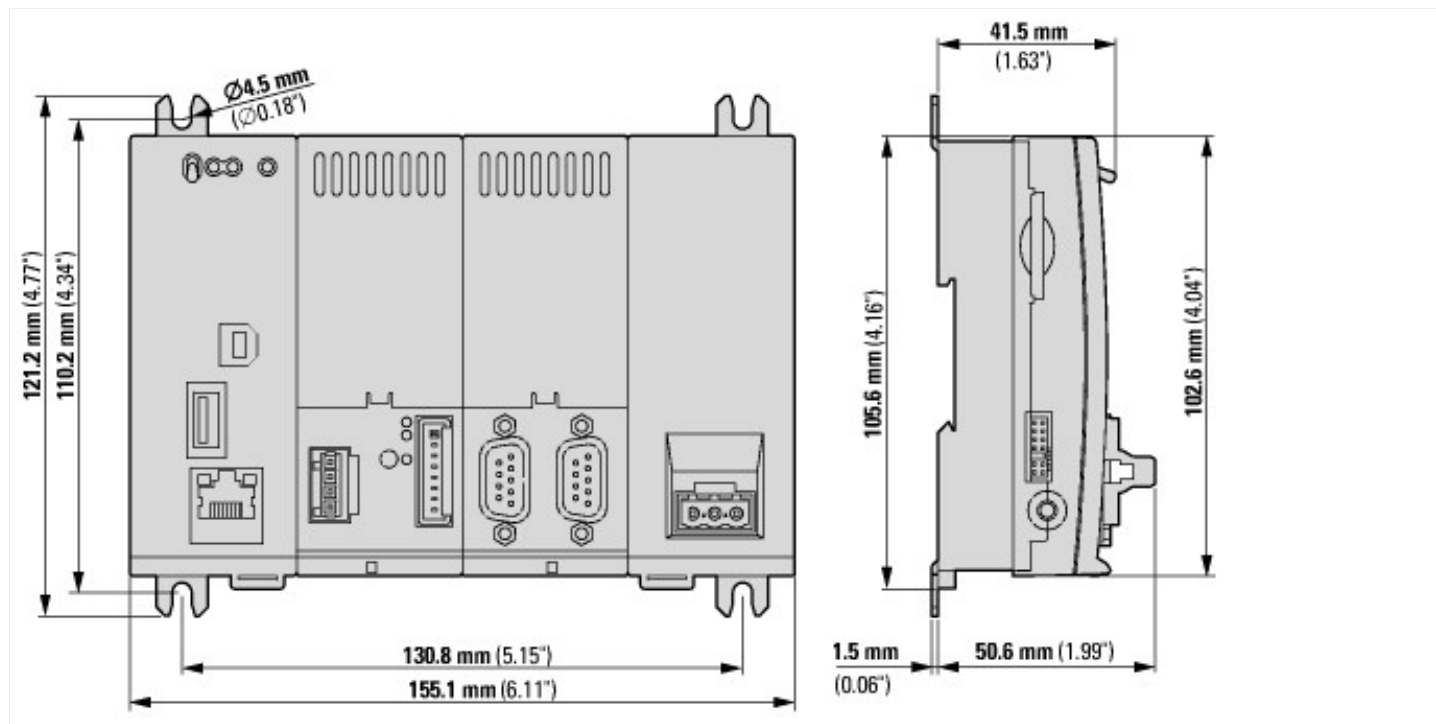

Assets (links)

Declaration of CE Conformity

00002507

Instruction Leaflets

IL05003006Z2018_02

Manuals

MN050001ZU_DE (German)

MN050001ZU_EN (English)

MN05003007Z-DE (German)

MN05003007Z-EN (English)

Additional product information (links)

Instruction leaflet "XC-152 compact PLC" IL05003006Z

Instruction leaflet "XC-152 compact PLC" ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05003006Z2018_02.pdf
IL05003006Z

MN050001ZU Operator manual XC-152 compact PLC

MN050001ZU Bedienerhandbuch XC-152 ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050001ZU_DE.pdf
Kompakt-SPS - Deutsch

MN050001ZU Operator manual XC-152 compact ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN050001ZU_EN.pdf
PLC - English

User manual XSoft-CoDeSys-2, SPS programming XC152 MN05003007Z

Benutzerhandbuch XSoft-CoDeSys-2, SPS- ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05003007Z-DE.pdf
Programmierung XC152 MN05003007Z - Deutsch

Benutzerhandbuch XSoft-CoDeSys-2, SPS- ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05003007Z_DE.pdf
Programmierung XC152 MN05003007Z - Deutsch

User manual XSoft-CoDeSys-2, SPS ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05003007Z-EN.pdf
programming XC152 MN05003007Z - English

User manual XSoft-CoDeSys-2, SPS ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05003007Z_EN.pdf
programming XC152 MN05003007Z - English

Manual XSOFT-CODESYS-3, SPS programming MN048008ZU

Handbuch XSOFT-CODESYS-3, SPS- ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN048008ZU_DE.pdf
Programmierung MN048008ZU - Deutsch

Manual XSOFT-CODESYS-3, SPS programming ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN048008ZU_EN.pdf
MN048008ZU - English

System description, Windows CE MN05010007Z

Systembeschreibung, Windows CE ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05010007Z_DE.pdf
MN05010007Z - Deutsch

System description, Windows CE MN05010007Z ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05010007Z_EN.pdf
- English

SmartWire-DT manual, The System MN05006002Z

Handbuch SmartWire-DT, Das System MN05006002Z - Deutsch	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006002Z_DE.pdf
SmartWire-DT manual, The System MN05006002Z - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006002Z_EN.pdf
Manuale SmartWire-DT, il sistema MN05006002Z - italiano	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006002Z_IT.pdf
SmartWire-DT manual, SWD module IP20 MN05006001Z	
Handbuch SmartWire-DT, SWD-Modul IP20 MN05006001Z - Deutsch	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006001Z_DE.pdf
SmartWire-DT manual, SWD module IP20 MN05006001Z - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006001Z_EN.pdf
Manuale SmartWire-DT, modulo SWD IP20 MN05006001Z - italiano	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN05006001Z_IT.pdf
Manual SmartWire-DT, SWD module IP6x MN120006	
Handbuch SmartWire-DT, SWD-Modul IP6x MN120006 - Deutsch	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN120006_DE.pdf
Manual SmartWire-DT, SWD module IP6x MN120006 - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN120006_EN.pdf
SmartWire-DT product range catalog	http://ecat.moeller.net/flip-cat/?edition=SWKAT&startpage=12
Technical data	http://ecat.moeller.net/flip-cat/?edition=SWKAT&startpage=52
f1=1454&f2=1242&f3=1773;Download Software GALILEO	http://applications.eaton.eu/sdlc?LX=11&amp
Product overview (WEB)	http://www.eaton.eu/xc152