




**DOL starter, 24 V DC, 1,5 - 6,5 (AC-53a), 9 (AC-51) A, Push in terminals, Controlled stop, PTB 13 ATEX 3003**

**Part no.** EMS-DOS-T-9-24VDC  
**Catalog No.** 170104  
**Alternate Catalog No.** EMS-DOS-T-9-24VDC  
**EL-Nummer (Norway)** 4137400

### Delivery program

|  |                |                |  |
|--|----------------|----------------|--|
| Product range  |                |                | This item is only available for a limited time. Replacement item: Art. no. 192397, Type: EMS2-DOS-T-9-24VDC  |
| Basic function   |                |                | Electronic motor starter   |
| Description  |                |                | DOL starters (complete devices)<br>DOL starting<br>Motor protection<br>Emergency-stop actuator<br>Circuit design: safety output stage with bypass, three-phase disconnect. |
| <b>Conformity, Approval</b>  |                |                |  |
| Explosion protection (according to ATEX 94/9/EC)                                   |                |                | II (2) G [Ex e] [Ex d] [Ex px]<br>II (2) D [Ex t] [Ex p]   |
| EC-prototype test certification  |                |                | PTB 13 ATEX 3003   |
| <b>Motor ratings</b>   |                |                |  |
| Max. rating for three-phase motors, 50 - 60 Hz                                     |                |                |  |
| AC-53a   |                |                |  |
| 380 V 400 V 415 V  | P              | kW             | 0.55 - 3   |
| Setting range of overload releases   | I <sub>r</sub> | A <sub>x</sub> | 1,5 - 6,5 (AC-53a)<br>9 (AC-51)  |
|  |                |                |  |
| Actuating voltage  |                |                | 24 V DC  |
| Connection technique   |                |                | Push in terminals  |
| Stop Function  |                |                | Controlled stop  |
| Connection to SmartWire-DT   |                |                | no   |

### Technical data

|  |            |                 |  |
|--|------------|-----------------|--|
| <b>General</b>                                 |            |                 |  |
| Standards                                      |            |                 | IEC/EN 60947-4-2<br>UL508                    |
| <b>Dimensions</b>                              |            |                 |  |
| Width  |            | mm              | 30   |
| Height   |            | mm              | 157  |
| Depth  |            | mm              | 123.5  |
| Weight   |            | kg              | 0.3  |
| Mounting                                       |            |                 | Top-hat rail IEC/EN 60715, 35 mm             |
| Protection type (IEC/EN 60529, EN50178, VBG 4) |            |                 | IP20   |
| Mounting position                              |            |                 | Vertical<br>Motor feeder at bottom           |
| Lifespan, electrical                           | Operations |                 | 3 x 10 <sup>7</sup>                          |
| Max. switching frequency                       |            |                 | Operations/200 (pulse pause time 50:50)<br>h |
| <b>Terminal capacity</b>                       |            |                 |  |
| Solid  |            | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>1 x AWG20 - 14           |
| flexible, with ferrule                         |            | mm <sup>2</sup> | 2 x (0.75 - 2.5)<br>1 x AWG20 - 14           |
| Notes  |            |                 | Minimum length 10 mm.                        |
| flexible, with twin ferrule                    |            | mm <sup>2</sup> | 2 x (0.75 - 1.5)                             |

|       |  |  |                       |
|-------|--|--|-----------------------|
| Notes |  |  | 2 x AWG20 - 16        |
|       |  |  | Minimum length 10 mm. |

### Climatic environmental conditions

|                               |   |    |   |
|-------------------------------|---|----|---|
| Operating ambient temperature |   | °C | -25 - +60, in accordance with IEC 60068-2-1       |
| Condensation                  |   |    | Take appropriate measures to prevent condensation |
| Storage                       | 9 | °C | -40 - +80   |

### Main conducting paths

|   |           |       |  |
|---|-----------|-------|--|
| Rated impulse withstand voltage                                     | $U_{imp}$ | V AC  | 6000   |
| Overvoltage category/pollution degree                               |           |       | III/2  |
| Rated operational voltage   | $U_e$     | V     | 42 - 550   |
| Rated operational current   |           |       |  |
| AC-51   | $I_e$     | A     | 1.20 - 9   |
| AC-53a  | $I_e$     | A     | 1.20 - 6.5   |
| Heat dissipation  | $P_V$     | W     | 3.3 - 14.6   |
| Static heat dissipation, non-current-dependent                      | $P_{vs}$  | W     | 1  |
| Basic insulation to IEC/EN60947-1                                   |           |       |  |
| Between supply, control, and switching voltages                     |           | V AC  | 500  |
| between feedback signal output and switch voltage                   |           | V AC  | 500  |
| Safe isolation to IEC/EN60947-1                                     |           |       |  |
| Between supply, control, and switching voltages                     |           | V AC  | ≤ 300  |
| between feedback signal output and switch voltage                   |           | V AC  | ≤ 300  |
| Safe isolation to EN 50178  |           |       |  |
| Between supply, control, and switching voltages                     |           | V AC  | 500  |
| between feedback signal output and switch voltage                   |           | V AC  | 500  |
| Current measurement   |           |       |  |
| Setting range of overload releases                                  | $I_r$     | A_x   | 1,5 - 6,5 (AC-53a)<br>9 (AC-51)  |
| Release class   |           | CLASS | 10 ( $I_r \leq 4$ A)<br>10A ( $I_r > 4$ A)   |
| Recovery time   | $t_W$     | min.  | 2 (manual startup)<br>20 (automatic restart)   |
| Balance monitoring  |           |       |  |
| Magnitude $I_{max} > I_{rated}$ ( $(I_{max} - I_{min})/I_{max}$ )   |           | %     | If ≥ 33, pick-up time of 120 s<br>If ≥ 67, pick-up time of 1.8 s                         |
| Magnitude $I_{max} < I_{rated}$ ( $(I_{max} - I_{min})/I_{rated}$ ) |           | %     | If ≥ 33, pick-up time of 120 s<br>If ≥ 67, pick-up time of 1.8 s                         |
| Stall protection  |           |       |  |
| Pick-up time I (L1) or I (L3)                                       |           | A     | 45   |
| Pick-up time  |           | S     | 2  |
| Short-circuit rating  |           |       |  |
| Type "1" coordination   |           |       |  |
| Short-circuit protective device                                     |           |       | 50 kA, 500 V AC: Fuse 16 A gG/gL<br>50 kA, 415 V AC: PKM0-4<br>15 kA, 415 V AC: PKM0-6,3 |

### Control section

|                                      |           |      |                           |
|--------------------------------------|-----------|------|---------------------------|
| Input data                           |           |      |                           |
| Supply voltage                       | $U_{AUX}$ | V DC | A1 - A2: 24 (-20 - +25 %) |
| Residual ripple on the input voltage |           | %    | ≤ 5                       |
| Supply voltage "confirm Off"         | $U_{AUX}$ | V DC | < 5                       |
| Input current                        |           | mA   | 40                        |
| Note on input current                |           |      | without feedback signal   |
| Actuating circuit (ON, L, R)         |           |      |                           |
| Switching level "Low"                |           | V    | -3 - +9.6 V DC            |
| Switching level "confirm Off"        |           | V    | < 5 V DC                  |
| Switching level "High"               |           | V    | 19.2 - 30 V DC            |
| Input current                        |           | mA   | 5                         |
| Feedback outputs                     |           |      |                           |
| Notes                                |           |      | Contacts 95, 96 or 98     |

|                           |       |         |      |
|---------------------------|-------|---------|------|
| <b>Contacts</b>           |       |         |      |
| CO = changeover           |       |         | 1 CO |
| Rated operational voltage | $U_e$ | V AC/DC | 250  |
| Rated operational current |       |         |      |
| AC-15                     |       |         |      |
| 230 V                     | $I_e$ | A       | 3    |
| DC-13                     |       |         |      |
| 24 V                      | $I_e$ | A       | 2    |

### Electromagnetic compatibility (EMC)

|   |  |     |  |
|---|--|-----|--|
| <b>Electrostatic discharge (ESD)</b>                          |  |     |  |
| applied standard  |  |     | IEC/EN 61000-4-2, Level 3  |
| Air discharge   |  | kV  | 8  |
| Contact discharge   |  | kV  | 6  |
| <b>Electromagnetic fields (RFI)</b>                           |  |     |  |
| applied standard  |  |     | IEC/EN 61000-4-3   |
|   |  | V/m | 800 - 1000 MHz: 10<br>1.4 - 2 GHz: 10<br>2.0 - 2.7 GHz: 3  |
| Radio interference suppression                                |  |     | EN 55011, Class A (emitted interference, line-conducted)<br>EN 61000-6-3, Class A (emitted interference, radiated)   |
| Note on use   |  |     | This product is designed for operation in industrial environments (environment 2). The use in residential environments (environment 1) could cause electrical interference so that addition suppression must be planned. |
| Burst   |  | kV  | 2<br>IEC/EN 61000-4-4, level 3   |
| power pulses (Surge)  |  |     | 1 kV (symmetrical)<br>2 kV (asymmetrical)<br>according to IEC/EN 61000-4-5   |
| Immunity to line-conducted interference to (IEC/EN 61000-4-6) |  | V   | 10   |

### Technical safety parameters:

|                                    |       |    |  |
|------------------------------------|-------|----|--|
| <b>Notes</b>                       |       |    |  |
|                                    |       |    | Safe switch off.<br>See Safety manual PU05907001Z.   |
| Ambient temperature                |       | °C | 40   |
| Values according to EN ISO 13849-1 |       |    |  |
| MTTF <sub>d</sub>                  | Years |    | 421  |
| Performance level                  | PL    |    | e  |
| Category                           |       |    | 3  |
| Values according to IEC 62061      |       |    |  |
|                                    |       |    | $\lambda_{sd}$ [FIT]: 47<br>$\lambda_{su}$ [FIT]: 1582<br>$\lambda_{dd}$ [FIT]: 269<br>$\lambda_{du}$ [FIT]: 2,4<br>SGF [%]: 99,8<br>DCS [%]: 2,9<br>DC [%]: 99<br>PFH [1/h]: $2,4 \times 10^{-9}$<br>SIL: 3 |
| <b>Notes</b>                       |       |    |  |
|                                    |       |    | Safe switch off.<br>See Safety manual PU05907001Z.   |

### Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| <b>Technical data for design verification</b>            |            |    |  |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 6.5  |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 2.1  |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 6.3  |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 1  |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.                       |            | °C | -25  |
| Operating ambient temperature max.                       |            | °C | 60   |
| <b>IEC/EN 61439 design verification</b>                  |            |    |  |
| 10.2 Strength of materials and parts                     |            |    |  |
| 10.2.2 Corrosion resistance                              |            |    |  |
|  |            |    | Meets the product standard's requirements. |

|  |  |  |
|--|--|--|
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013])


|  |    |                         |
|--|----|-------------------------|
| Kind of motor starter  |    | Direct starter          |
| With short-circuit release   |    | No                      |
| Rated control supply voltage $U_s$ at AC 50HZ                            | V  | 0 - 0                   |
| Rated control supply voltage $U_s$ at AC 60HZ                            | V  | 0 - 0                   |
| Rated control supply voltage $U_s$ at DC                                 | V  | 24 - 24                 |
| Voltage type for actuating   |    | DC                      |
| Rated operation power at AC-3, 230 V, 3-phase                            | kW | 1.5                     |
| Rated operation power at AC-3, 400 V                                     | kW | 3                       |
| Rated power, 460 V, 60 Hz, 3-phase                                       | kW | 2.2                     |
| Rated power, 575 V, 60 Hz, 3-phase                                       | kW | 0                       |
| Rated operation current $I_e$  | A  | 9                       |
| Rated operation current at AC-3, 400 V                                   | A  | 6.5                     |
| Overload release current setting   | A  | 1.5 - 9                 |
| Rated conditional short-circuit current, type 1, 480 Y/277 V             | A  | 0                       |
| Rated conditional short-circuit current, type 1, 600 Y/347 V             | A  | 0                       |
| Rated conditional short-circuit current, type 2, 230 V                   | A  | 0                       |
| Rated conditional short-circuit current, type 2, 400 V                   | A  | 0                       |
| Number of auxiliary contacts as normally open contact                    |    | 1                       |
| Number of auxiliary contacts as normally closed contact                  |    | 1                       |
| Ambient temperature, upper operating limit                               | °C | 40                      |
| Temperature compensated overload protection                              |    | Yes                     |
| Release class  |    | CLASS 10                |
| Type of electrical connection of main circuit                            |    | Spring clamp connection |
| Type of electrical connection for auxiliary- and control current circuit |    | Spring clamp connection |
| Rail mounting possible   |    | Yes                     |
| With transformer   |    | No                      |
| Number of command positions  |    | 0                       |

|   |    |         |
|---|----|---------|
| Suitable for emergency stop                         |    | Yes     |
| Coordination class according to IEC 60947-4-3       |    | Class 1 |
| Number of indicator lights                          |    | 4       |
| External reset possible                             |    | Yes     |
| With fuse   |    | No      |
| Degree of protection (IP)                           |    | IP20    |
| Degree of protection (NEMA)                         |    | Other   |
| Supporting protocol for TCP/IP                      |    | No      |
| Supporting protocol for PROFIBUS                    |    | No      |
| Supporting protocol for CAN                         |    | No      |
| Supporting protocol for INTERBUS                    |    | No      |
| Supporting protocol for ASI                         |    | No      |
| Supporting protocol for MODBUS                      |    | No      |
| Supporting protocol for Data-Highway                |    | No      |
| Supporting protocol for DeviceNet                   |    | No      |
| Supporting protocol for SUCONET                     |    | No      |
| Supporting protocol for LON                         |    | No      |
| Supporting protocol for PROFINET IO                 |    | No      |
| Supporting protocol for PROFINET CBA                |    | No      |
| Supporting protocol for SERCOS                      |    | No      |
| Supporting protocol for Foundation Fieldbus         |    | No      |
| Supporting protocol for EtherNet/IP                 |    | No      |
| Supporting protocol for AS-Interface Safety at Work |    | No      |
| Supporting protocol for DeviceNet Safety            |    | No      |
| Supporting protocol for INTERBUS-Safety             |    | No      |
| Supporting protocol for PROFIsafe                   |    | No      |
| Supporting protocol for SafetyBUS p                 |    | No      |
| Supporting protocol for other bus systems           |    | No      |
| Width   | mm | 30      |
| Height  | mm | 157     |
| Depth   | mm | 123.5   |


## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking |
| UL File No.                          |  | E29096   |
| UL Category Control No.              |  | NLDX, NLDX7  |
| CSA File No.                         |  | UL report applies to both US and Canada              |
| North America Certification          |  | UL listed, certified by UL for use in Canada         |
| Specially designed for North America |  | No   |


## Characteristics

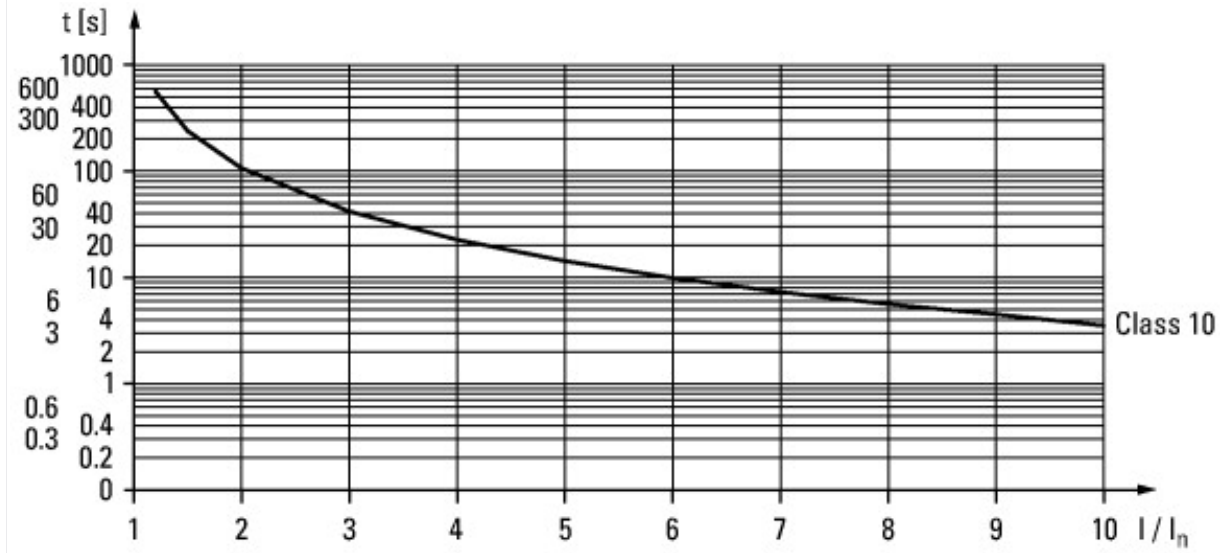

Tripping characteristics  
CLASS 10  
set motor current  $\leq 4$  A

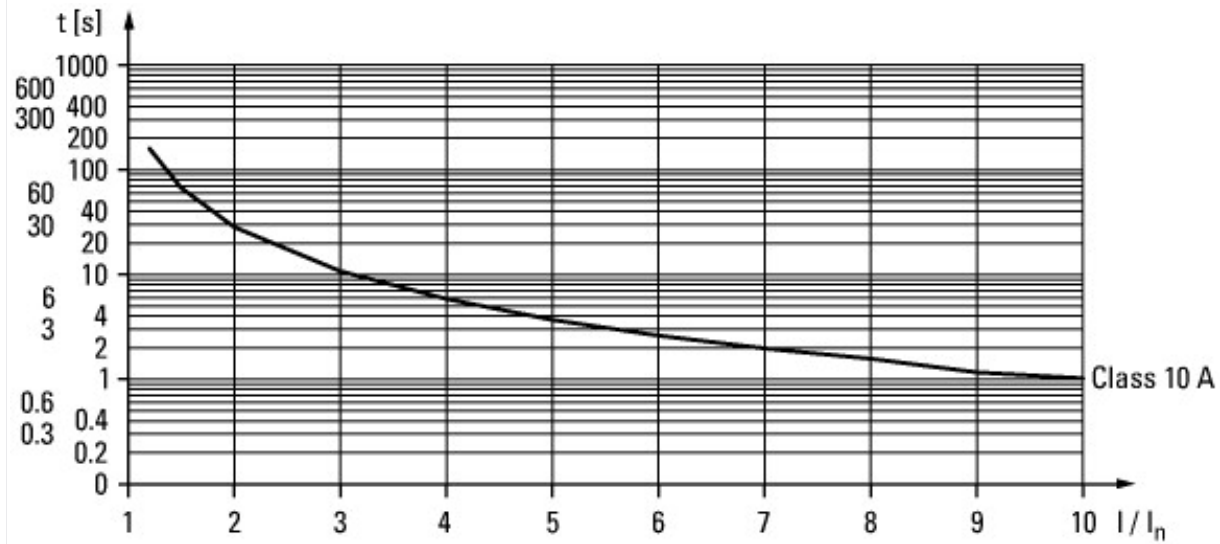


Tripping characteristics  
CLASS 10A  
set motor current  $> 4$  A

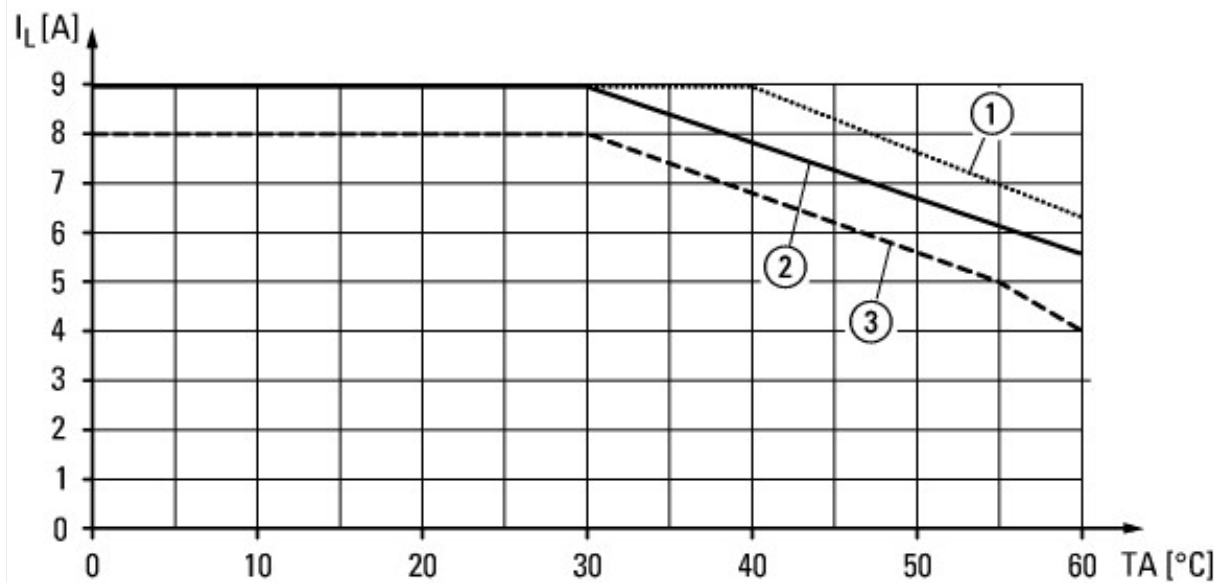

Current derating  
① Single device  
② connected in series with 30 mm clearance  
③ connected in series with 30 mm clearance

## Dimensions

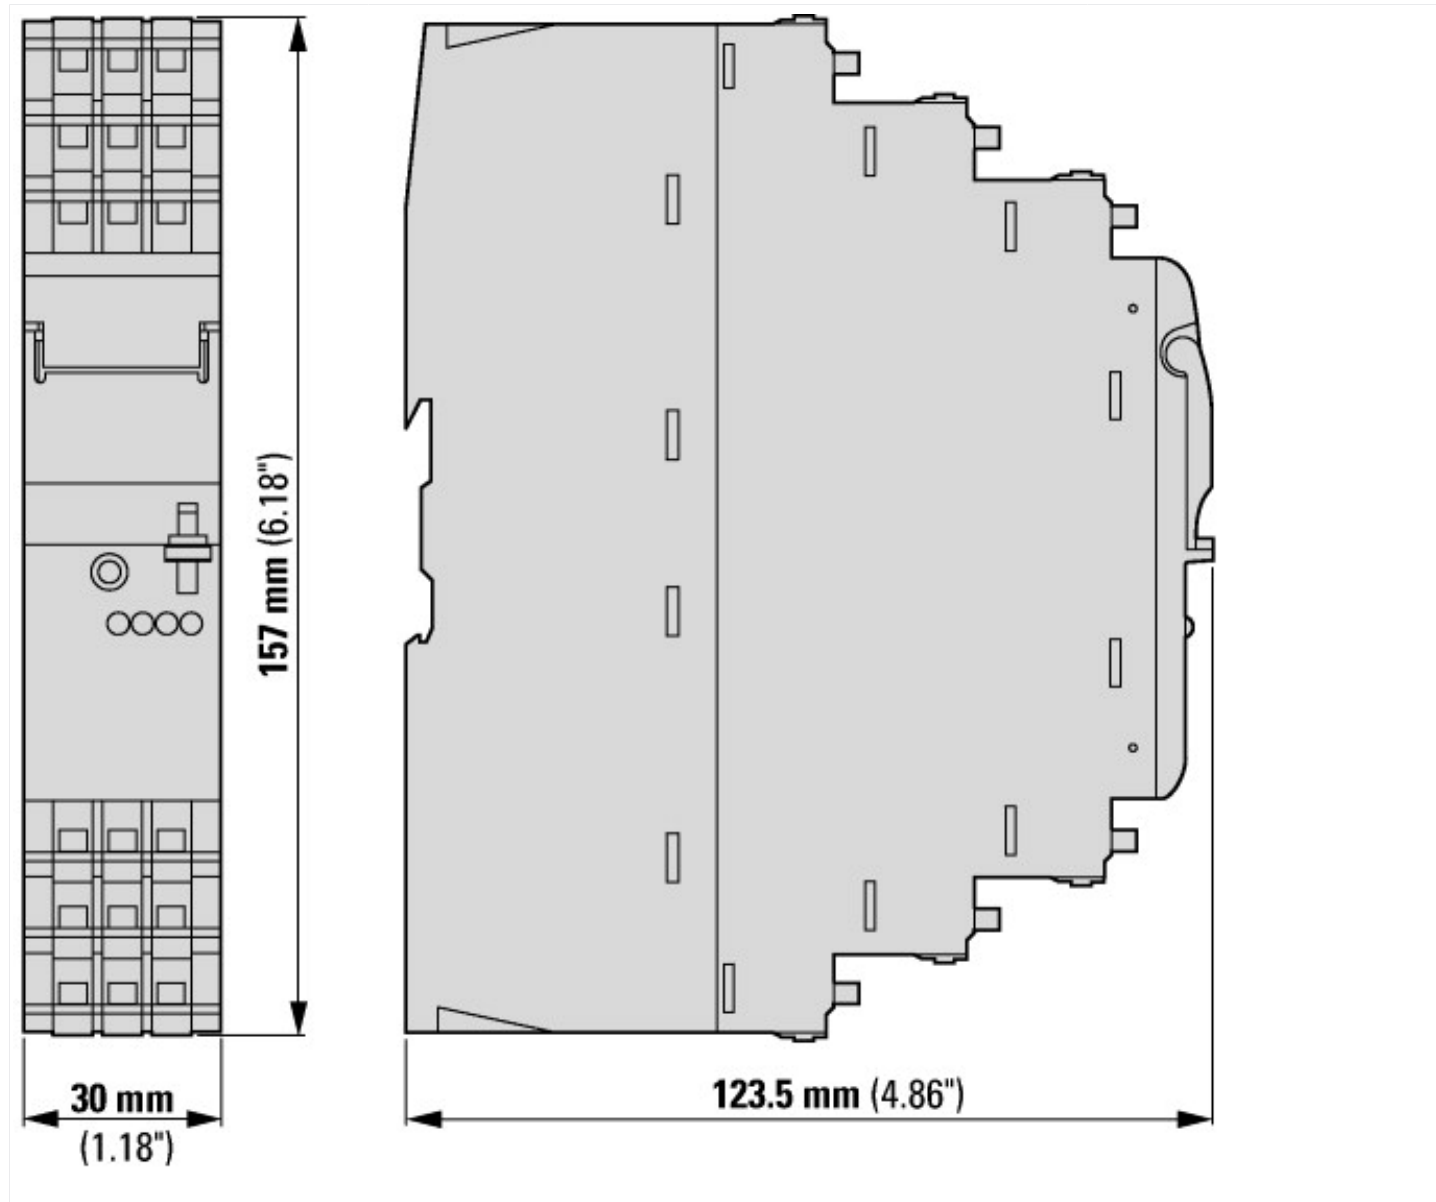

## Additional product information (links)

|  |   |
|--|---|
| <b>IL03407198Z Electronic motor starter EMS</b>              |   |
| IL03407198Z Electronic motor starter EMS                     | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407198Z2018_04.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407198Z2018_04.pdf</a>                                     |
| <b>MN03407009Z EMS electronic motor starter</b>              |   |
| MN03407009Z EMS electronic motor starter - Deutsch / English | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN03407009Z_DE_EN.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN03407009Z_DE_EN.pdf</a>   |
| Produktinformation EMS, Hinweise zur Projektierung           | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf</a> |