



Board, 4 outgoing, 225mm width, 125 A

Part no. **MSFB-4-125A**  
 Catalog No. **191091**  
 Alternate Catalog No. **MSFB-4-125A**  
 EL-Nummer **2400347**  
 (Norway)

## Delivery program

|                           |       |    |             |
|---------------------------|-------|----|-------------|
| Product range             |       |    | Accessories |
| Accessories               |       |    | Board       |
| Self-extinguishing        |       |    | to UL 94    |
| Width                     |       | mm | 225         |
| Pole                      |       |    | 3           |
| Rated operational current | $I_e$ | A  | 125         |
| For use with              |       |    | MSFA...     |

## Technical data

### General

|                                 |  |    |            |
|---------------------------------|--|----|------------|
| Standards                       |  |    | EN 61439-1 |
| Interval between busbar centres |  | mm | 60         |
| Mounting position               |  |    | horizontal |
| Degree of Protection            |  |    | IP20       |
| Weight                          |  | kg | 0.79       |

### Contacts

|                                 |           |    |       |
|---------------------------------|-----------|----|-------|
| Rated operational voltage       | $U_e$     | V  | 690   |
| Rated frequency                 | f         | Hz | 50/60 |
| Rated impulse withstand voltage | $U_{imp}$ | kV | 6     |


### Electrical data

|                           |       |   |     |
|---------------------------|-------|---|-----|
| Rated operational current | $I_e$ | A | 125 |
|---------------------------|-------|---|-----|

## Technical data ETIM 7.0

|  |  |    |        |
|--|--|----|--------|
| Energy distribution systems (EG000015) / Busbar system for distribution boards (EC001900)  |  |    |        |
| Electric engineering, automation, process control engineering / Electrical insulation and connecting material / Energy distribution system / Busbar system for distribution boards (ec@ss10.0.1-27-40-06-13 [ACO389011]) |  |    |        |
| Height   |  | mm | 160    |
| Width  |  | mm | 225    |
| Depth  |  | mm | 45     |
| Number of poles  |  |    | 3      |
| Busbar distance  |  | mm | 60     |
| Busbar height  |  | mm | 0      |
| Busbar thickness   |  | mm | 0      |
| Rated current  |  | A  | 125    |
| Short-circuit breaking capacity (I <sub>cw</sub> )   |  | kA | 10     |
| Material   |  |    | Copper |
| Surface protection   |  |    | Bare   |

## Dimensions

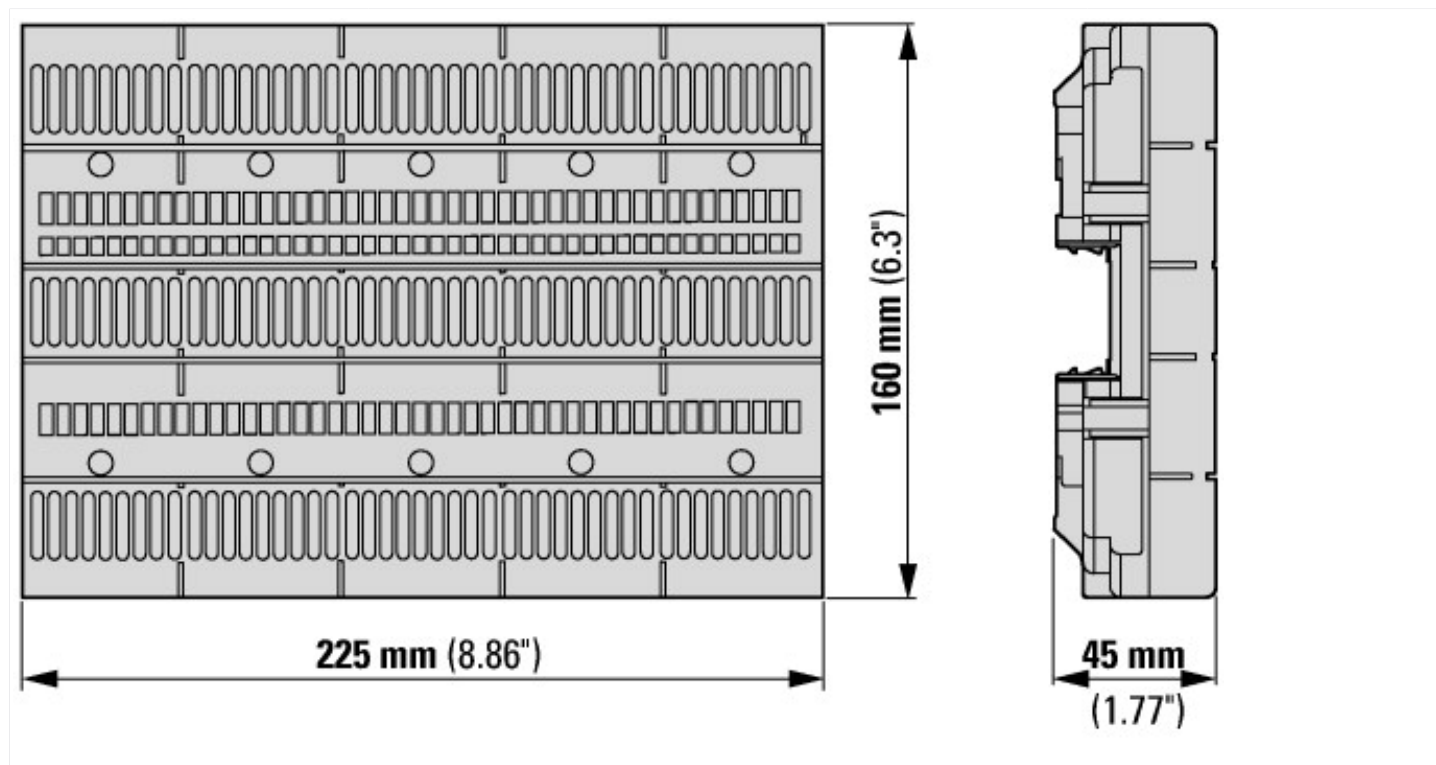

## Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)