






**Emergency-stop/emergency stop illuminated pushbutton, black, maintained**

**Part no.** Q25LPV-S  
**Catalog No.** 257064  
**Alternate Catalog No.** Q25LPV-S

**Delivery program**

|                                      |   |    |  |
|--------------------------------------|---|----|--|
| Product range                        |   |    | RMQ16  |
| Basic function                       |   |    | STOP pushbuttons<br>Emergency stop pushbuttons   |
| Single unit/Complete unit            |   |    | Single unit  |
| Design                               |   |    | Mushroom-shaped  |
| Diameter                             | ∅ | mm | 28   |
| Illumination                         |   |    | Illuminated  |
| Approval                             |   |    |   |
| Description                          |   |    | Pull-to-release function<br>Tamper-proof according to ISO 13850, EN 418<br>Pushbutton remains in pushed position   |
| <b>Colour</b>                        |   |    |  |
| Mushroom head                        |   |    | Black<br>  |
| Degree of Protection                 |   |    | IP65   |
| Connection to SmartWire-DT           |   |    | no   |
| Front dimensions                     |   |    | 25 × 25 mm   |
| Information about equipment supplied |   |    | with built-in multiple LED, 24 V DC, I <sub>e</sub> = 15 mA<br>Positive pole at X1<br>No bulb replacement required.  |

**Design verification as per IEC/EN 61439**

|  |                   |    |  |
|--|-------------------|----|--|
| Technical data for design verification   |                   |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 0  |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 0  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 0  |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0.36                                       |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 60   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements. |

|  |  |  |
|--|--|--|
| 10.2.4 Resistance to ultra-violet (UV) radiation         |  | Please enquire   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact                                 |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions                                      |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES                  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances                   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock                   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0


|   |    |             |
|---|----|-------------|
| Low-voltage industrial components (EG000017) / Front element for push button (EC000221)   |    |             |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Front element for push-button actuators (ec1@ss10.0.1-27-37-12-10 [AKF028014]) |    |             |
| Colour button   |    | Black       |
| Number of command positions   |    | 1           |
| Construction type lens  |    | Rectangular |
| Hole diameter   | mm | 16          |
| Width opening   | mm | 0           |
| Height opening  | mm | 0           |
| Type of button  |    | High        |
| Suitable for illumination   |    | Yes         |
| With protective cover   |    | No          |
| Labelled  |    | No          |
| Switching function latching   |    | Yes         |
| Spring-return   |    | No          |
| With front ring   |    | Yes         |
| Material front ring   |    | Plastic     |
| Colour front ring   |    | Black       |
| Degree of protection (IP), front side   |    | IP65        |
| Degree of protection (NEMA), front side   |    | 1           |

## Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No.                 |  | E29184  |
| UL Category Control No.     |  | NKCR  |
| CSA File No.                |  | 46552   |
| CSA Class No.               |  | 3211-03   |
| North America Certification |  | UL listed, CSA certified                                |
| Degree of Protection        |  | UL/CSA Type 1   |

## Dimensions

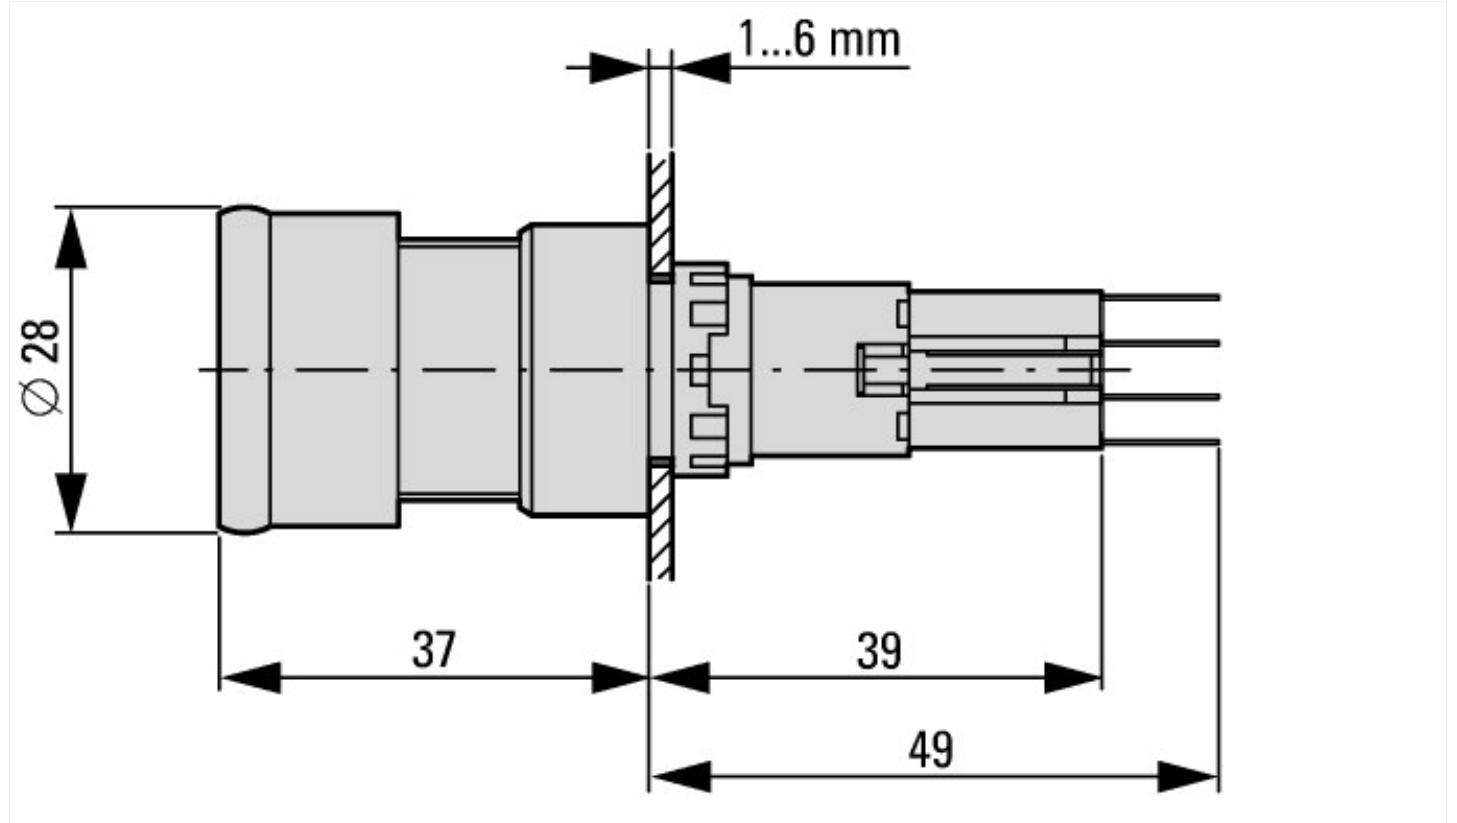

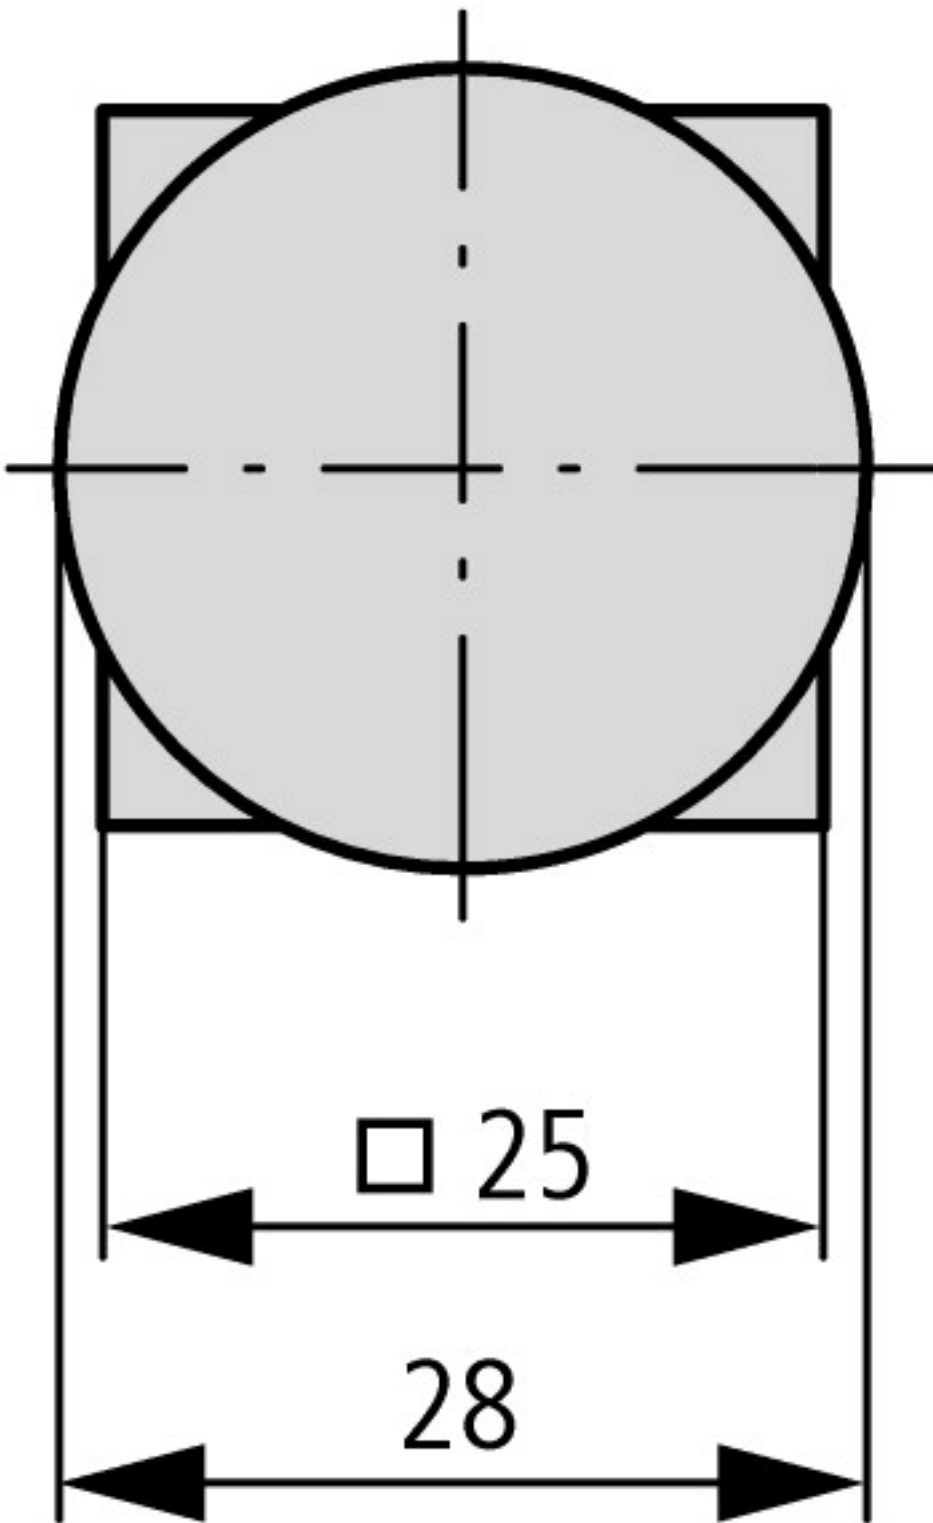

Actuating and indicator elements  
Square style

## Assets (links)

### Declaration of CE Conformity

00002898

### Instruction Leaflets

IL04716016Z2018\_05

## Additional product information (links)

### IL04716016Z (AWA1160-1429) Mounting of components

IL04716016Z (AWA1160-1429) Mounting of components

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04716016Z2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716016Z2018_05.pdf)