




**Contactors, 380 V 400 V 18.5 kW, 2 N/O, 2 NC, 230 V 50 Hz, 240 V 60 Hz, AC operation, Screw terminals**

**Part no. DILM40-22(230V50HZ,240V60HZ)**  
**Catalog No. 277798**  
**Alternate Catalog No. XTCE040D22GF**  
**EL-Nummer 4110336**  
**(Norway)**

### Delivery program

|                      |  |   |
|----------------------|--|---|
| Product range        |  | Contactors  |
| Application          |  | Contactors for Motors   |
| Subrange             |  | Complete devices up to 170 A  |
| Utilization category |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>AC-3/AC-3e: Normal AC induction motors: Starting, switching off while running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Connection technique |  | Screw terminals   |
|                      |  |   |
| Notes                |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.<br>Also tested according to AC-3e.  |

### Rated operational current

|   |                |   |     |
|---|----------------|---|-----|
| AC-3  |                |   |     |
| 380 V 400 V   | $I_e$          | A | 40  |
| AC-1  |                |   |     |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |     |
| Open  |                |   |     |
| at 40 °C  | $I_{th} = I_e$ | A | 60  |
| enclosed  | $I_{th}$       | A | 45  |
| Conventional free air thermal current, 1 pole             |                |   |     |
| open  | $I_{th}$       | A | 125 |
| enclosed  | $I_{th}$       | A | 112 |

### Max. rating for three-phase motors, 50 - 60 Hz

|             |   |    |      |
|-------------|---|----|------|
| AC-3        |   |    |      |
| 220 V 230 V | P | kW | 12.5 |
| 380 V 400 V | P | kW | 18.5 |
| 660 V 690 V | P | kW | 23   |
| AC-4        |   |    |      |
| 220 V 230 V | P | kW | 5    |
| 380 V 400 V | P | kW | 9    |
| 660 V 690 V | P | kW | 12   |


### Contacts

|                       |  |       |
|-----------------------|--|-------|
| N/O = Normally open   |  | 2 N/O |
| N/C = Normally closed |  | 2 NC  |

### Instructions

Contacts to EN 50 012. with mirror contact.

### Contact sequence



### Actuating voltage

230 V 50 Hz, 240 V 60 Hz


### Voltage AC/DC

AC operation

## Technical data

### General

|           |  |                                 |
|-----------|--|---------------------------------|
| Standards |  | IEC/EN 60947, VDE 0660, UL, CSA |
|-----------|--|---------------------------------|
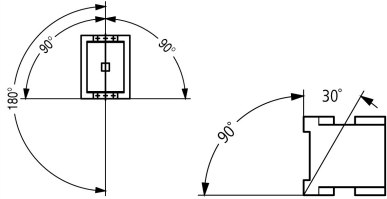
|   |                                     |                 |  |
|---|-------------------------------------|-----------------|--|
| Lifespan, mechanical  |                                     |                 |  |
| AC operated   | Operations                          | $\times 10^6$   | 10   |
| Operating frequency, mechanical                                       |                                     |                 |  |
| AC operated   | Operations/h                        |                 | 5000   |
| Climatic proofing   |                                     |                 |  |
|   |                                     |                 | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature   |                                     |                 |  |
| Open  |                                     | °C              | -25 - +60  |
| Enclosed  |                                     | °C              | - 25 - 40  |
| Storage   |                                     | °C              | - 40 - 80  |
| Mounting position   |                                     |                 |  |
|   |                                     |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |                                     |                 |  |
| Half-sinusoidal shock, 10 ms  |                                     |                 |  |
| Main contacts   |                                     |                 |  |
| N/O contact   |                                     | g               | 10   |
| Auxiliary contacts  |                                     |                 |  |
| N/O contact   |                                     | g               | 7  |
| N/C contact   |                                     | g               | 5  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |                                     |                 |  |
| Half-sinusoidal shock, 10 ms  |                                     |                 |  |
| Main contacts   |                                     |                 |  |
| N/O contact   |                                     | g               | 10   |
| Auxiliary contacts  |                                     |                 |  |
| N/O contact   |                                     | g               | 7  |
| N/C contact   |                                     | g               | 5  |
| Degree of Protection  |                                     |                 |  |
|   |                                     |                 | IP00   |
| Protection against direct contact when actuated from front (EN 50274) |                                     |                 |  |
|   |                                     |                 | Finger and back-of-hand proof  |
| Altitude  |                                     |                 |  |
|   |                                     | m               | Max. 2000  |
| Weight  |                                     |                 |  |
| AC operated   |                                     | kg              | 0.9  |
| Screw connector terminals   |                                     |                 |  |
| Terminal capacity main cable  |                                     |                 |  |
| Solid   |                                     | mm <sup>2</sup> | 1 x (0.75 - 16)<br>2 x (0.75 - 16)   |
| Flexible with ferrule   |                                     | mm <sup>2</sup> | 1 x (0.75 - 35)<br>2 x (0.75 - 25)   |
| Stranded  |                                     | mm <sup>2</sup> | 1 x (16 - 50)<br>2 x (16 - 35)   |
| Solid or stranded   |                                     | AWG             | single 14 - 1, double 14 - 2   |
| Flat conductor  | Lamellenzahl<br>x Breite x<br>Dicke | mm              | 2 x (6 x 9 x 0.8)  |
| Stripping length  |                                     | mm              | 14   |
| Terminal screw  |                                     |                 | M6   |
| Tightening torque   |                                     | Nm              | 3.3  |
| Tool  |                                     |                 |  |
| Pozidriv screwdriver  |                                     | Size            | 2  |
| Standard screwdriver  |                                     | mm              | 0.8 x 5.5<br>1 x 6   |
| Terminal capacity control circuit cables                              |                                     |                 |  |
| Solid   |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule   |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)   |

|                      |  |      |                    |
|----------------------|--|------|--------------------|
| Solid or stranded    |  | AWG  | 18 - 14            |
| Stripping length     |  | mm   | 10                 |
| Terminal screw       |  |      | M3.5               |
| Tightening torque    |  | Nm   | 1.2                |
| Tool                 |  |      |                    |
| Pozidriv screwdriver |  | Size | 2                  |
| Standard screwdriver |  | mm   | 0.8 x 5.5<br>1 x 6 |

### Main conducting paths

|  |             |      |       |
|--|-------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$   | V AC | 8000  |
| Overvoltage category/pollution degree  |             |      | III/3 |
| Rated insulation voltage               | $U_i$       | V AC | 690   |
| Rated operational voltage              | $U_e$       | V AC | 690   |
| Safe isolation to EN 61140             |             |      |       |
| between coil and contacts              |             | V AC | 440   |
| between the contacts                   |             | V AC | 440   |
| Making capacity (p.f. to IEC/EN 60947) |             |      |       |
|  | Up to 690 V | A    | 560   |
| Breaking capacity                      |             |      |       |
| 220 V 230 V                            |             | A    | 400   |
| 380 V 400 V                            |             | A    | 400   |
| 500 V                                  |             | A    | 400   |
| 660 V 690 V                            |             | A    | 250   |
| Short-circuit rating                   |             |      |       |
| Short-circuit protection maximum fuse  |             |      |       |
| Type "2" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 63    |
| 690 V                                  | gG/gL 690 V | A    | 50    |
| Type "1" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 125   |
| 690 V                                  | gG/gL 690 V | A    | 80    |

### AC

|   |                |   |   |
|---|----------------|---|---|
| AC-1  |                |   |   |
| Rated operational current                                 |                |   |   |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |   |
| Open  |                |   |   |
| at 40 °C  | $I_{th} = I_e$ | A | 60  |
| at 50 °C  | $I_{th} = I_e$ | A | 57  |
| at 55 °C  | $I_{th} = I_e$ | A | 55  |
| at 60 °C  | $I_{th} = I_e$ | A | 50  |
| enclosed  | $I_{th}$       | A | 45  |
| Conventional free air thermal current, 1 pole             |                |   |   |
| open  | $I_{th}$       | A | 125   |
| enclosed  | $I_{th}$       | A | 112   |
| AC-3  |                |   |   |
| Rated operational current                                 |                |   |   |
| Open, 3-pole: 50 – 60 Hz                                  |                |   |   |
| Notes   |                |   | At maximum permissible ambient temperature (open.)<br>Also tested according to AC-3e. |
| 220 V 230 V   | $I_e$          | A | 40  |
| 240 V   | $I_e$          | A | 40  |
| 380 V 400 V   | $I_e$          | A | 40  |
| 415 V   | $I_e$          | A | 40  |
| 440V  | $I_e$          | A | 40  |
| 500 V   | $I_e$          | A | 40  |

|                          |       |     |      |
|--------------------------|-------|-----|------|
| 660 V 690 V              | $I_e$ | A   | 25   |
| 380 V 400 V              | $I_e$ | A   | 40   |
| Motor rating             | P     | kWh |      |
| 220 V 230 V              | P     | kW  | 12.5 |
| 240V                     | P     | kW  | 13.5 |
| 380 V 400 V              | P     | kW  | 18.5 |
| 415 V                    | P     | kW  | 24   |
| 440 V                    | P     | kW  | 25   |
| 500 V                    | P     | kW  | 28   |
| 660 V 690 V              | P     | kW  | 23   |
| <b>AC-4</b>              |       |     |      |
| Open, 3-pole: 50 – 60 Hz |       |     |      |
| 220 V 230 V              | $I_e$ | A   | 18   |
| 240 V                    | $I_e$ | A   | 18   |
| 380 V 400 V              | $I_e$ | A   | 18   |
| 415 V                    | $I_e$ | A   | 18   |
| 440 V                    | $I_e$ | A   | 18   |
| 500 V                    | $I_e$ | A   | 18   |
| 660 V 690 V              | $I_e$ | A   | 14   |
| Motor rating             | P     | kWh |      |
| 220 V 230 V              | P     | kW  | 5    |
| 240 V                    | P     | kW  | 5.5  |
| 380 V 400 V              | P     | kW  | 9    |
| 415 V                    | P     | kW  | 9.5  |
| 440 V                    | P     | kW  | 10   |
| 500 V                    | P     | kW  | 11   |
| 660 V 690 V              | P     | kW  | 12   |

## DC

|                                 |       |   |    |
|---------------------------------|-------|---|----|
| Rated operational current, open |       |   |    |
| DC-1                            |       |   |    |
| 60 V                            | $I_e$ | A | 50 |
| 110 V                           | $I_e$ | A | 50 |
| 220 V                           | $I_e$ | A | 45 |

## Current heat loss

|  |  |    |      |
|--|--|----|------|
| 3 pole, at $I_{th}$ (60°)                |  | W  | 10.3 |
| Current heat loss at $I_e$ to AC-3/400 V |  | W  | 6.6  |
| Impedance per pole                       |  | mΩ | 1.9  |

## Magnet systems

|   |          |         |            |
|---|----------|---------|------------|
| Voltage tolerance   |          |         |            |
| AC operated   | Pick-up  | $x U_c$ | 0.8 - 1.1  |
| Drop-out voltage AC operated                                  | Drop-out | $x U_c$ | 0.3 - 0.6  |
| Power consumption of the coil in a cold state and 1.0 x $U_S$ |          |         |            |
| 50 Hz   | Pick-up  | VA      | 149        |
| 50 Hz   | Sealing  | VA      | 16         |
| 50 Hz   | Sealing  | W       | 4.1        |
| 60 Hz   | Pick-up  | VA      | 178        |
| 60 Hz   | Sealing  | VA      | 19         |
| 60 Hz   | Sealing  | W       | 4.1        |
| 50/60 Hz  | Sealing  | W       | 5.3<br>4.3 |
| Duty factor   |          | % DF    | 100        |
| Changeover time at 100 % $U_S$ (recommended value)            |          |         |            |
| Main contacts   |          |         |            |
| AC operated   |          |         |            |
| Closing delay   |          | ms      | 12 - 18    |

|                                     |                   |   |
|-------------------------------------|-------------------|---|
| Opening delay                       | ms                | 8 - 13  |
| Arcing time                         | ms                | 10  |
| Lifespan, mechanical; Coil 50/60 Hz | x 10 <sup>6</sup> | Mechanical lifespan at 50 Hz approx. 30% lower than under "Technical data, general" |

### Electromagnetic compatibility (EMC)

|                       |  |               |
|-----------------------|--|---------------|
| Emitted interference  |  | to EN 60947-1 |
| Interference immunity |  | to EN 60947-1 |

### Rating data for approved types

|                                      |    |                 |
|--------------------------------------|----|-----------------|
| Switching capacity                   |    |                 |
| Maximum motor rating                 |    |                 |
| Three-phase                          |    |                 |
| 200 V<br>208 V                       | HP | 10              |
| 230 V<br>240 V                       | HP | 15              |
| 460 V<br>480 V                       | HP | 30              |
| 575 V<br>600 V                       | HP | 40              |
| Single-phase                         |    |                 |
| 115 V<br>120 V                       | HP | 3               |
| 230 V<br>240 V                       | HP | 7.5             |
| General use                          | A  | 63              |
| Auxiliary contacts                   |    |                 |
| Pilot Duty                           |    |                 |
| AC operated                          |    | A600            |
| DC operated                          |    | P300            |
| General Use                          |    |                 |
| AC                                   | V  | 600             |
| AC                                   | A  | 15              |
| DC                                   | V  | 250             |
| DC                                   | A  | 1               |
| Short Circuit Current Rating         |    |                 |
| Basic Rating                         |    |                 |
| SCCR                                 | kA | 10              |
| max. Fuse                            | A  | 250             |
| max. CB                              | A  | 250             |
| 480 V High Fault                     |    |                 |
| SCCR (fuse)                          | kA | 30/100          |
| max. Fuse                            | A  | 250/150 Class J |
| SCCR (CB)                            | kA | 65              |
| max. CB                              | A  | 100             |
| 600 V High Fault                     |    |                 |
| SCCR (fuse)                          | kA | 30/100          |
| max. Fuse                            | A  | 250/150 Class J |
| SCCR (CB)                            | kA | 30              |
| max. CB                              | A  | 250             |
| Special Purpose Ratings              |    |                 |
| Electrical Discharge Lamps (Ballast) |    |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A  | 79              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A  | 79              |
| Incandescent Lamps (Tungsten)        |    |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A  | 74              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A  | 74              |
| Resistance Air Heating               |    |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase   | A  | 79              |
| 600V 60Hz 3phase, 347V 60Hz 1phase   | A  | 79              |

|                  |  |    |      |
|------------------|--|----|------|
| Elevator Control |  |    |      |
| 200V 60Hz 3phase |  | HP | 7.5  |
| 200V 60Hz 3phase |  | A  | 25.3 |
| 240V 60Hz 3phase |  | HP | 10   |
| 240V 60Hz 3phase |  | A  | 28   |
| 480V 60Hz 3phase |  | HP | 25   |
| 480V 60Hz 3phase |  | A  | 34   |
| 600V 60Hz 3phase |  | HP | 30   |
| 600V 60Hz 3phase |  | A  | 32   |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 40   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 2.2  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 6.6  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 4.1  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 60   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0

|   |  |   |           |
|---|--|---|-----------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |  |   |           |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |  |   |           |
| Rated control supply voltage $U_s$ at AC 50HZ   |  | V | 230 - 230 |
| Rated control supply voltage $U_s$ at AC 60HZ   |  | V | 240 - 240 |
| Rated control supply voltage $U_s$ at DC  |  | V | 0 - 0     |
| Voltage type for actuating  |  |   | AC        |
| Rated operation current $I_e$ at AC-1, 400 V  |  | A | 60        |

|   |    |                  |
|---|----|------------------|
| Rated operation current Ie at AC-3, 400 V               | A  | 40               |
| Rated operation power at AC-3, 400 V                    | kW | 18.5             |
| Rated operation current Ie at AC-4, 400 V               | A  | 18               |
| Rated operation power at AC-4, 400 V                    | kW | 9                |
| Rated operation power NEMA                              | kW | 22               |
| Modular version   |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 2                |
| Number of auxiliary contacts as normally closed contact |    | 2                |
| Type of electrical connection of main circuit           |    | Screw connection |
| Number of normally closed contacts as main contact      |    | 0                |
| Number of main contacts as normally open contact        |    | 3                |

## Approvals


|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096   |
| UL Category Control No.              |  | NLDX   |
| CSA File No.                         |  | 012528   |
| CSA Class No.                        |  | 2411-03, 3211-04   |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |

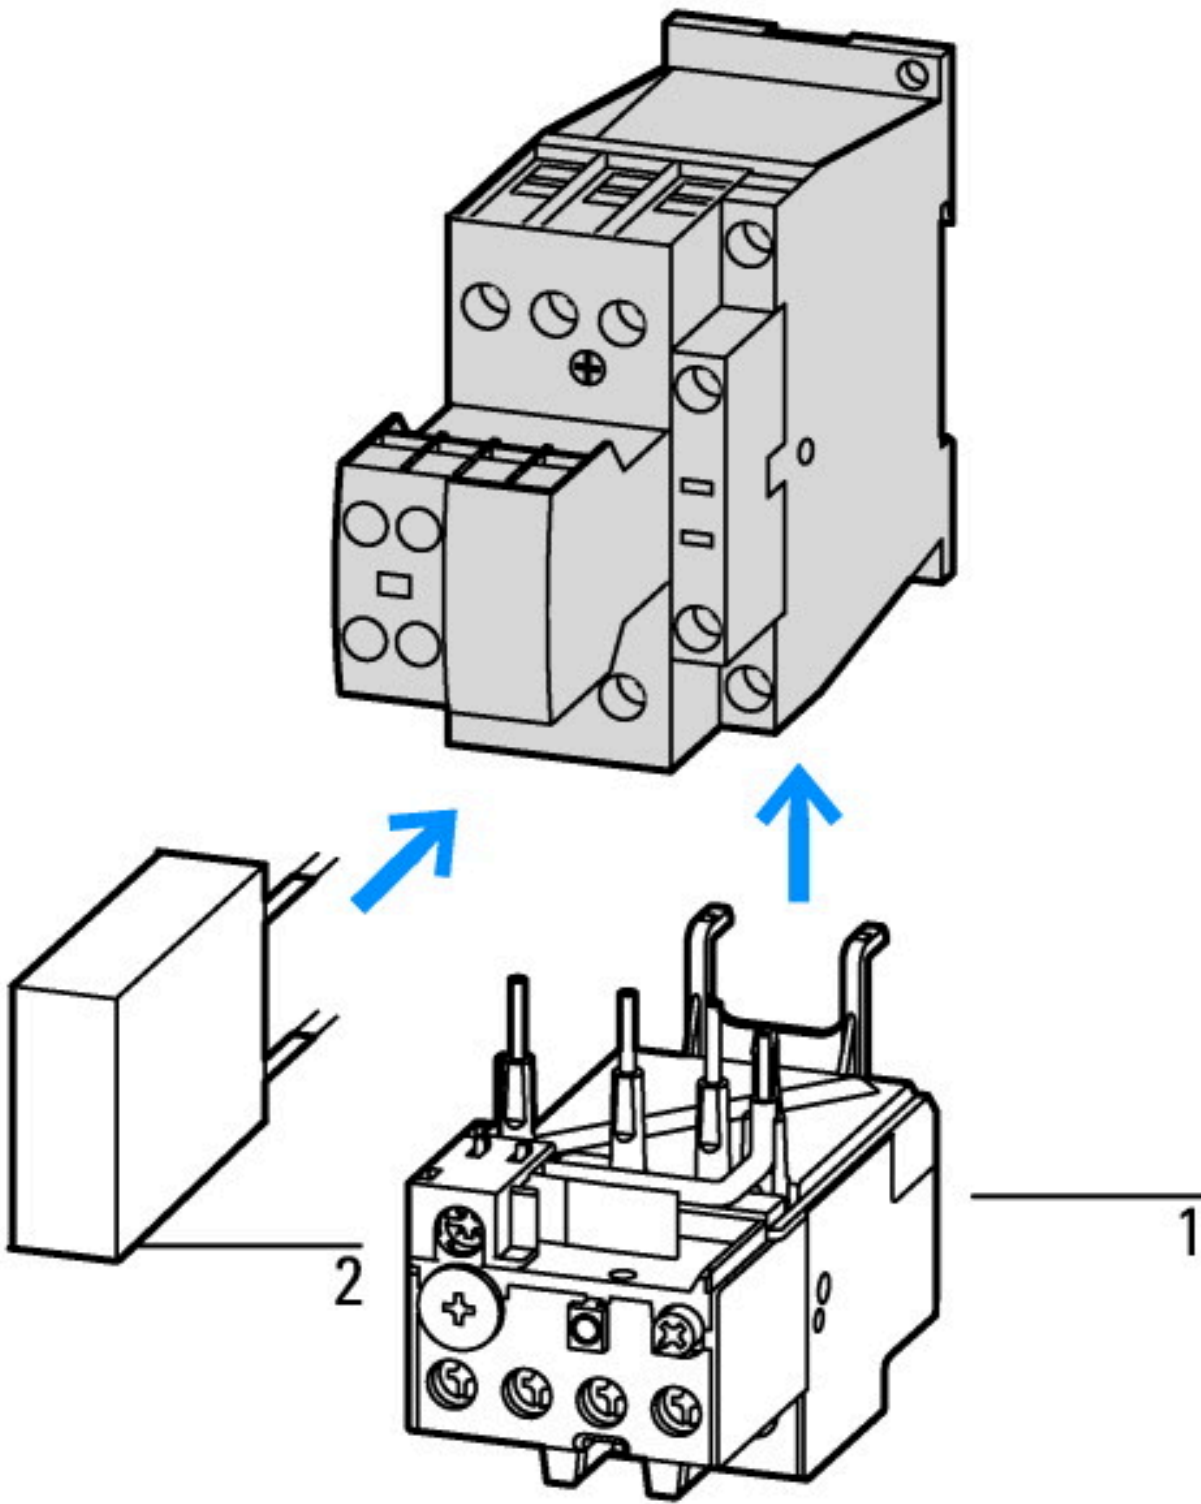


- 1: Overload relay
- 2: Suppressor



# DILM1000-XHI(V)11-...

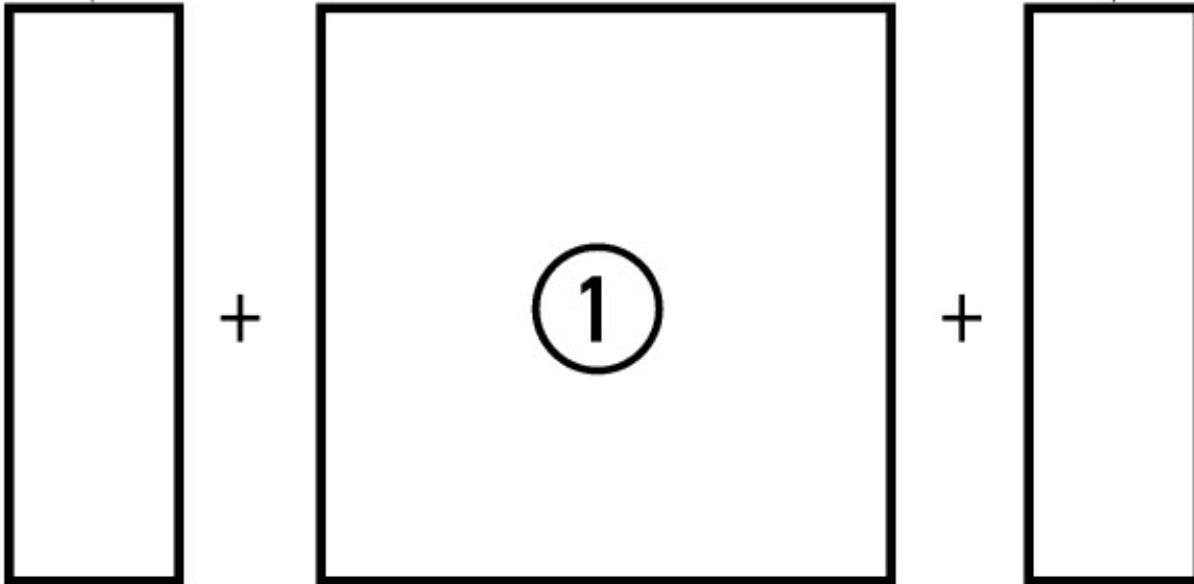

on the side: 2 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA11  
 on the side: 2 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (2 pole)  
 on the side: 1 x DILM1000-XHI(V)11-SI; surface mounting: 1 x DILM150-XHIA22  
 on the side: 1 x DILM1000-XHI(V)11-SA; surface mounting: 1 x DILM150-XHI (4 pole)

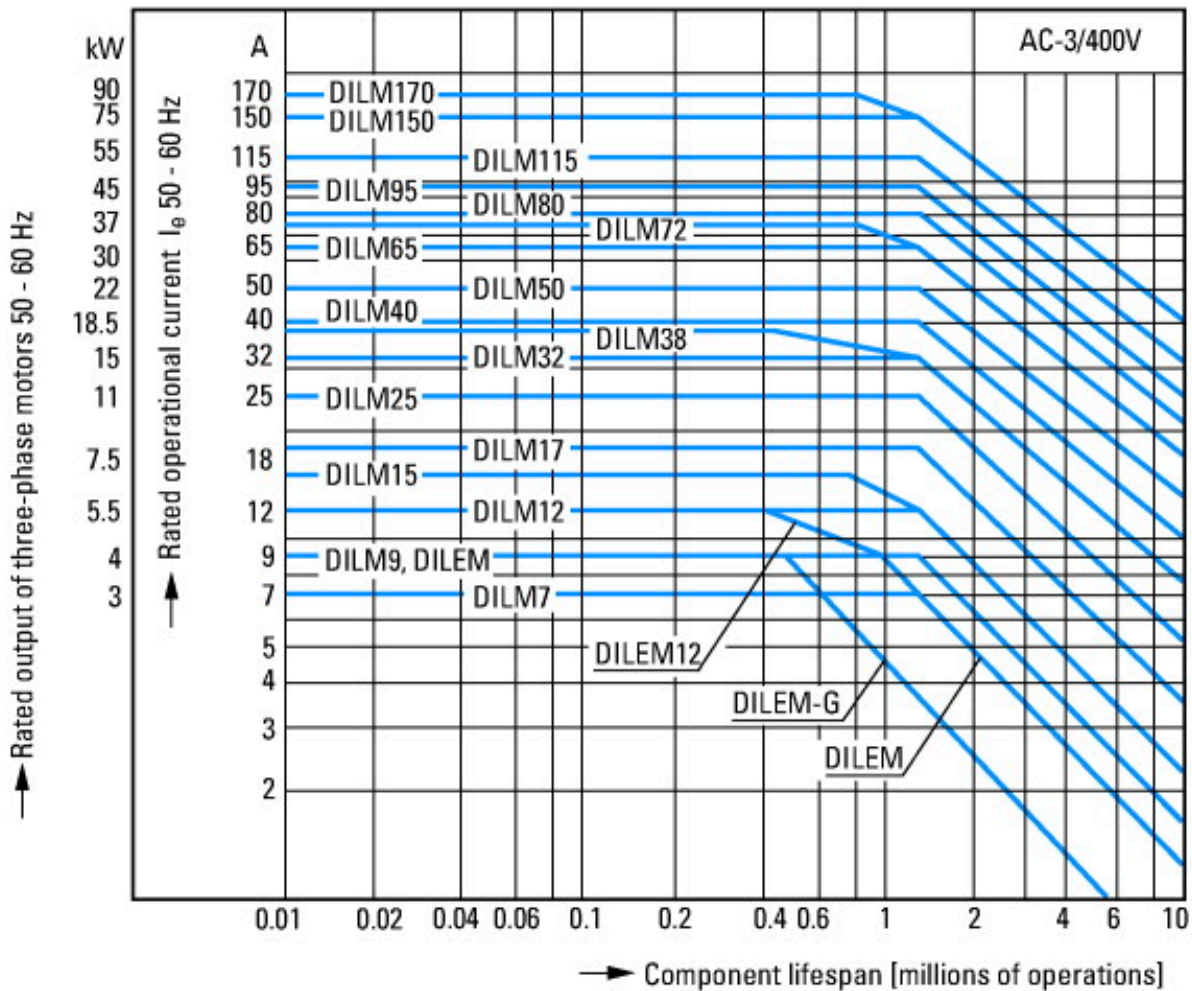

Squirrel-cage motor  
 Operating characteristics  
 Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 1 x rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications  
 Compressors  
 Lifts  
 Mixers  
 Pumps  
 Escalators  
 Agitators  
 Fans  
 Conveyor belts  
 Centrifuges  
 Hinged flaps  
 Bucket-elevators  
 Air conditioning system  
 General drives in manufacturing and processing machines




Extreme switching duty  
 Squirrel-cage motor  
 Operating characteristics  
 Inching, plugging, reversing  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 6 x rated motor current  
 Utilization category  
 100 % AC-4  
 Typical applications  
 Printing presses  
 Wire-drawing machines  
 Centrifuges  
 Special drives for manufacturing and processing machines



Switching conditions for 3 pole, non-motor loads  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat



### Dimensions

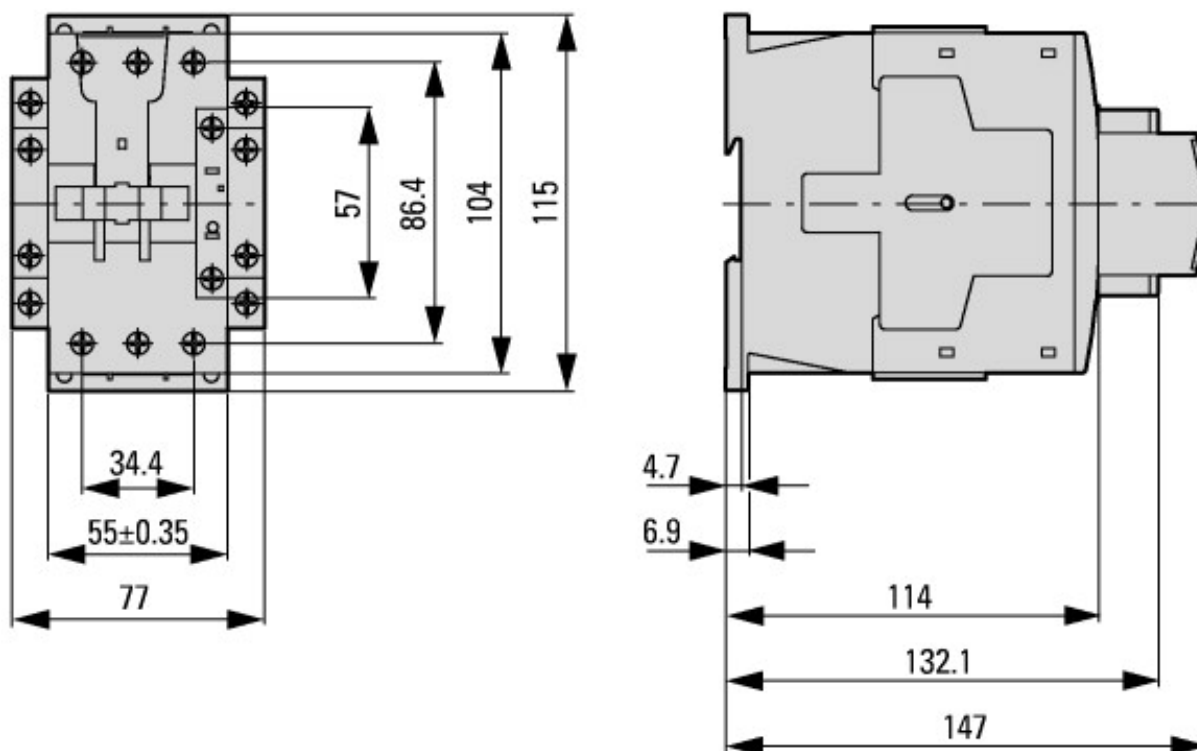

Contactor with auxiliary contact module



Lateral clearance to earthed parts: 6 mm

DILM40...DILM72  
 DILMC40...DILMC65  
 DILMF40...DILMF65

## Additional product information (links)

### IL03407033Z (AWA2100-2247) Contactor DILM, basic unit

|  |   |
|--|---|
| IL03407033Z (AWA2100-2247) Contactor DILM, basic unit  | <a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407033Z2018_03.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407033Z2018_03.pdf</a>                               |
| Motor starters and "Special Purpose Ratings" for the North American market                   | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>   |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely               | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>   |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>   |

|  |   |
|--|---|
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |