# DATASHEET - 025TS-01

No.

Carrier, +label, blank, black, facility for inscription





Similar to illustration

Delivery program	
Product range	Accessories
Basic function accessories	Label mount with insert label
Single unit/Complete unit	Single unit
Name	Blank, black, can be engraved
Colour	
	black
Connection to SmartWire-DT	no
Notes	
Blank, black, can be engraved	

# Design verification as per IEC/EN 61439

Design verniedaton as per 120/211 01455			
Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	А	0
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	Not applicable.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Text plate for control circuit devices (EC000624)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Identification plate for command devices (ecl@ss10.0.1-27-37-12-25 [AKF043014])

Imprint		Without imprint
Imprint ISO symbols		Without imprint
Colour		Black
Shape		Rectangular
Width	mm	25
Height	mm	38
Outer diameter	mm	0
Outer diameter	mm	0

**Approvals** 

North America Certification

UL/CSA certification not required

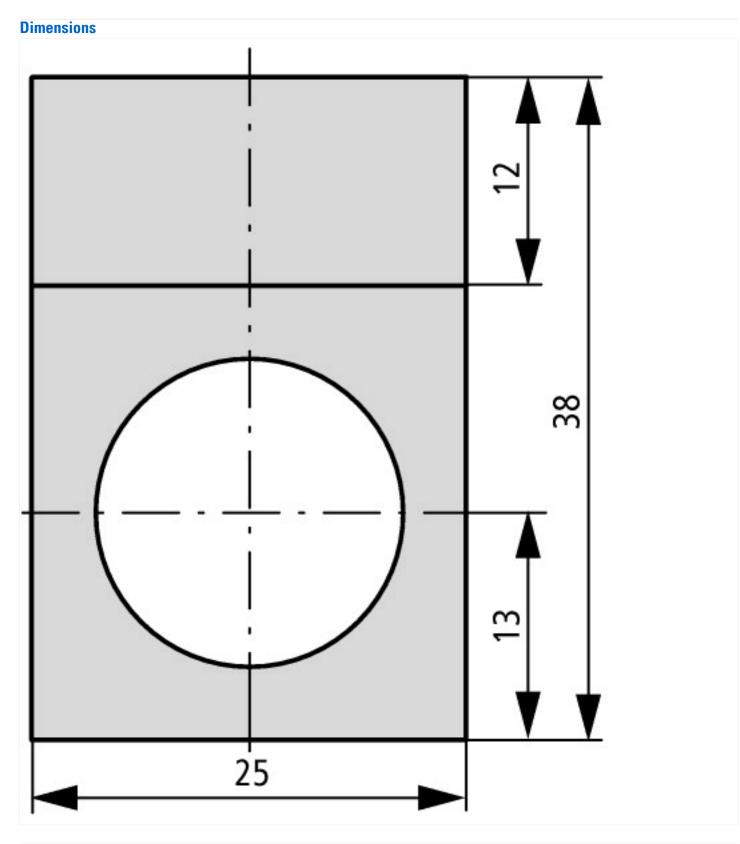

## Assets (links)

Declaration of CE Conformity 00002898 Instruction Leaflets IL0471601622018\_05

### **Additional product information (links)**

#### IL04716016Z (AWA1160-1429) Mounting of components

IL04716016Z (AWA1160-1429) Mounting of tp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/IL04716016Z2018\_05.pdf components